

Stainless Steel External Mount Vertical Pumps

RAE's MSVF Series vertical multistage external mount pumps are intended for industrial use to carry fluids such as water, coolant, light oil and other clean, non-aggressive fluids.

These flanged pumps are designed with the inlet and outlet on the

same plane to suit inline piping connections.

Stainless steel construction of housings and impellers with cast iron flanges ensures corrosion-free operation. All stainless construction is available as an option; consult factory for more information.

Applications:



- Water supply systems
- Industrial booster systems
- Industrial liquid transfer systems
- Water treatment systems
- Agricultural irrigation

MOTOR

Nominal speed: 3500 rpm at 60 Hz
Standard voltage: 3 phase; 230V/460V
Protection class: IP54
Insulation class: F




MODEL CODE

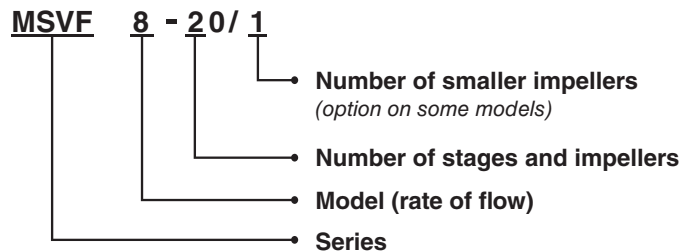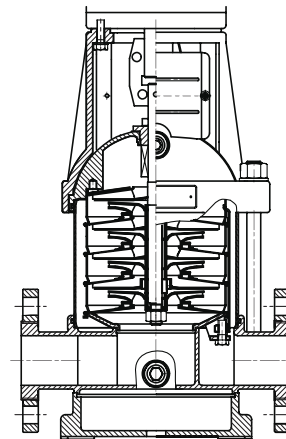

OPERATING LIMITS

Ambient temperature: Max 104°F
Liquid temperature range: 5°F to 158°F
Flow: 30 gpm to 61 gpm
Head: 43' to 663'
Operating pressure: Max 290 psi

PERFORMANCE CURVES

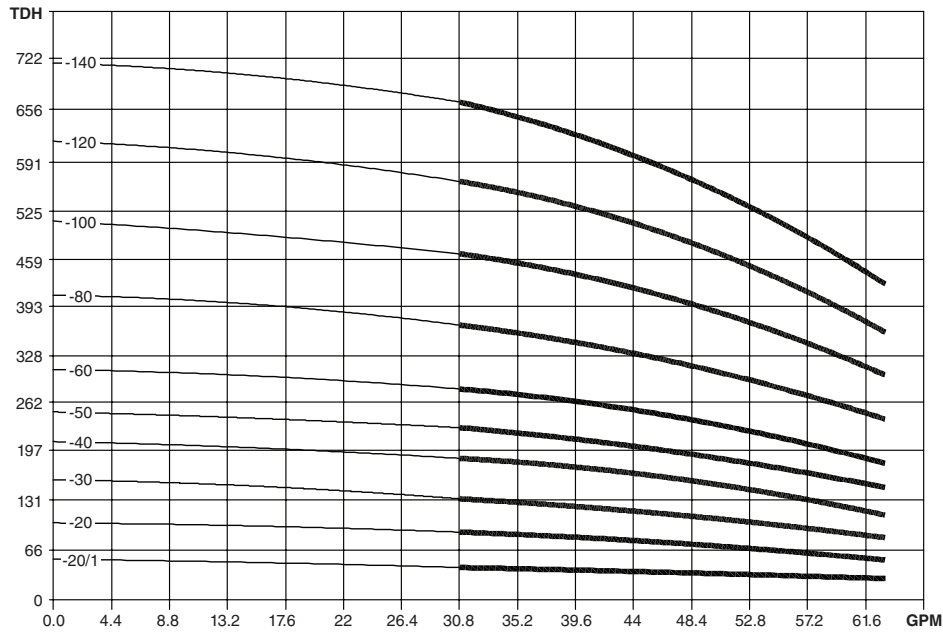

DIMENSIONS — WEIGHTS

Model	Power (hp)	A (inches)	B (inches)	C (inches)	D (inches)	E (inches)	Weight (pounds)	Max Inlet Pressure (psi)
MSVF8-20/1	1	23.30	13.66	9.65	6.69	5.59	70.55	87
MSVF8-20	2	25.40	14.06	11.41	7.48	6.10	83.78	87
MSVF8-30	3	26.65	15.24	11.41	7.48	6.10	90.39	87
MSVF8-40	4	30.39	16.81	13.58	7.76	6.50	108.02	87
MSVF8-50	4	21.57	17.99	13.58	7.76	6.50	110.23	87
MSVF8-60	5	33.15	19.57	13.98	9.06	7.40	127.87	145
MSVF8-80	7.5	37.68	22.32	15.35	10.23	8.19	156.53	145
MSVF8-100	10	40.04	24.69	15.35	10.23	8.19	176.37	145
MSVF8-120	10	42.40	27.04	15.35	10.23	8.19	180.78	145
MSVF8-140	15	52.56	32.87	19.69	12.99	10.04	337.31	145

