



**Model: [701503](#)**  
**Pulsation Dampener-Rebuild-NBR**

**Specs**

---

<b>Max Flow:</b>	75 gpm
<b>Min Pressure:</b>	200 psi
<b>Max Pressure:</b>	3000 psi
<b>Inlet Port Size:</b>	1/2"NPT(F)
<b>Discharge Port Size:</b>	1/2"NPT(F))
<b>Type of Accessory:</b>	Pulsation Dampener
<b>Material:</b>	Stainless Steel (SS)

---

**Description:**

This valve is designed to reduce pressure fluctuations or pulsation common in all positive displacement pump systems. It must be nitrogen pre-charged prior to installation on the discharge side of the pump. It is a replaceable bladder design constructed of 316SS with an NBR bladder for special fluid compatibility. It will prolong the life of the pump and system components by reducing pulsation to + or- 3%. [See optional FPM and EPDM versions]

---

**Accessory to be used with these Pumps:**




[6831K68](#) FRAME BLOCK-STYLE PLUNGER PUMP

[6841K68](#) FRAME BLOCK-STYLE PLUNGER PUMP

---



[3831](#) 38 FRAME BLOCK-STYLE PLUNGER PUMP

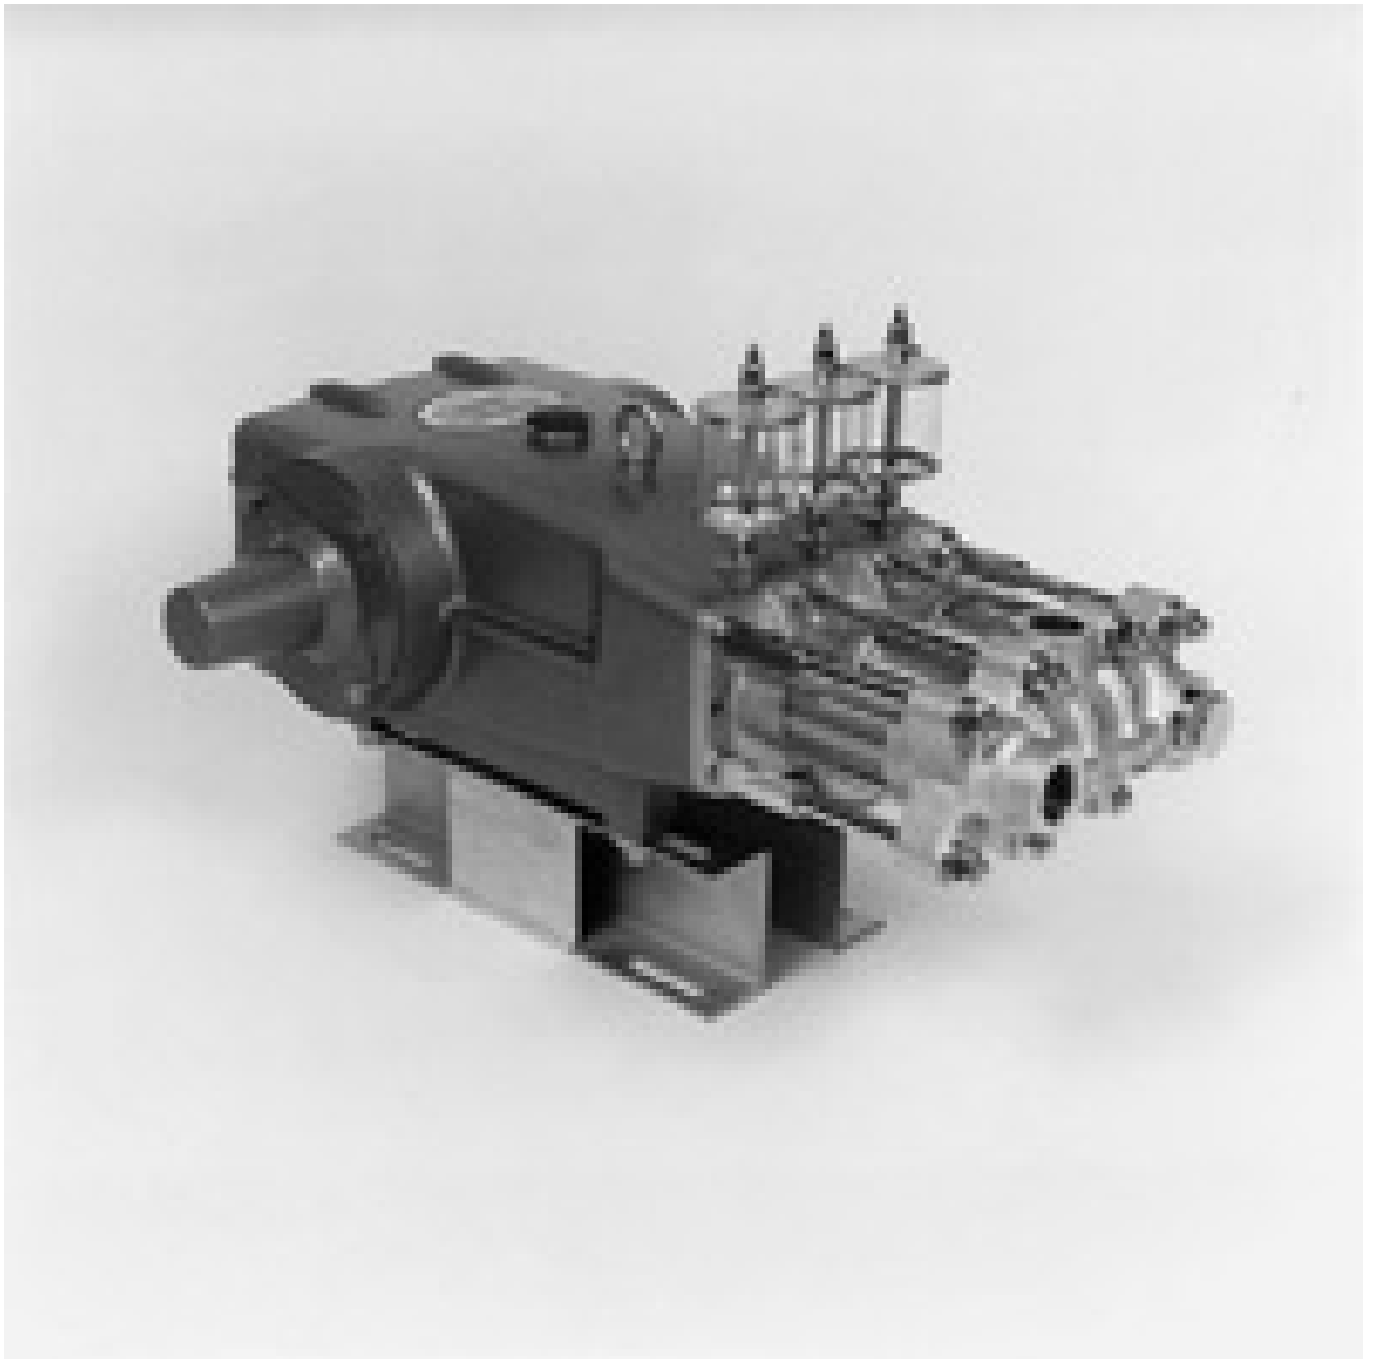

[6021](#)60 FRAME PISTON PUMP



[683568](#) FRAME BLOCK-STYLE PLUNGER PUMP



[6835K](#)68 FRAME BLOCK-STYLE PLUNGER PUMP

[6775](#)60 FRAME PLUNGER PUMP

---



[677160](#) FRAME PLUNGER PUMP



[677760](#) FRAME PLUNGER PUMP