




The Pumps with Nine Lives

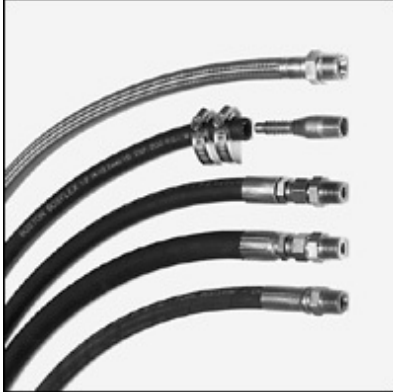

**Model: [990848](#)  
Flexible Inlet Hose**

**Specs**

Max Flow:	10 gpm
Min Pressure:	100 psi
Max Pressure:	200 psi
Inlet Port Size:	1.25
Discharge Port Size:	1.25
Type of Accessory:	Flexible Inlet Hose
Material:	Stainless Steel (SS)

**Description:**

Flexible hose should be installed at the inlet of the pump. If supply tank is more than 5-6 Feet or a booster pump is required, replace the flexible inlet hose with a C.A.T. Excessive elbows, tees and hard plumbing can cause restrictions and liquid acceleration loss and result in excessive vibration, water hammering, starvation and cavitation damage within the pump.

**Accessory to be used with these Pumps:**



[62110](#) FRAME PISTON PUMP



[10110](#) FRAME PISTON PUMP



[82110](#) FRAME PISTON PUMP

[7818](#) FRAME BLOCK-STYLE PLUNGER PUMP



[152125](#) FRAME PISTON PUMP



---

[153115](#) FRAME PLUNGER PUMP

---

[154115](#) FRAME PLUNGER PUMP

---

[781AL8](#) FRAME BLOCK-STYLE PLUNGER PUMP