




The Pumps with Nine Lives

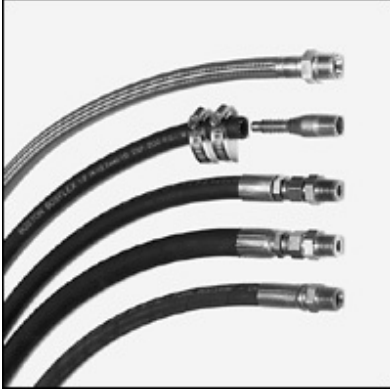

**Model: [990851](#)  
Flexible Inlet Hose**

**Specs**

Max Flow:	75 gpm
Min Pressure:	100 psi
Max Pressure:	200 psi
Inlet Port Size:	2.5
Discharge Port Size:	2.5
Type of Accessory:	Flexible Inlet Hose
Material:	Stainless Steel (SS)

**Description:**

Flexible hose should be installed at the inlet of the pump. If supply tank is more than 5-6 Feet or a booster pump is required, replace the flexible inlet hose with a C.A.T. Excessive elbows, tees and hard plumbing can cause restrictions and liquid acceleration loss and result in excessive vibration, water hammering, starvation and cavitation damage within the pump.

**Accessory to be used with these Pumps:**

[6760](#) FRAME PLUNGER PUMP



[6776](#) FRAME PLUNGER PUMP



[674760](#) FRAME PLUNGER PUMP

[684168](#) FRAME BLOCK-STYLE PLUNGER PUMP

[6841K68](#) FRAME BLOCK-STYLE PLUNGER PUMP

[686168](#) FRAME BLOCK-STYLE PLUNGER PUMP

[6861K68](#) FRAME BLOCK-STYLE PLUNGER PUMP



---

[677160](#) FRAME PLUNGER PUMP

---

[677560](#) FRAME PLUNGER PUMP

---

[676260](#) FRAME PLUNGER PUMP



[676760](#) FRAME PLUNGER PUMP

[676160](#) FRAME PLUNGER PUMP