

Model: [990859](#)

Flexible Discharge Hose



Specs

Max Flow: 10 gpm

Min Pressure: 100 psi

Max Pressure: 3000 psi

Inlet Port Size: 0.37

Discharge Port Size: 0.37

Type of Accessory: Flexible Discharge Hose

Material: Stainless Steel (SS)

Description:

Flexible hose should be installed in the discharge line prior to any hard plumbing. Excessive elbows, tees and hard plumbing can cause restrictions and liquid acceleration loss and result in excessive vibration and water hammering and damage within the pump.

Accessory to be used with these Pumps:



[2313](#) FRAME PLUNGER PUMP

[2373](#) FRAME PLUNGER PUMP



[2413](#) FRAME PLUNGER PUMP

[2473](#) FRAME PLUNGER PUMP



[2713](#) FRAME PLUNGER PUMP

[2773](#) FRAME PLUNGER PUMP

[3115](#) FRAME PLUNGER PUMP



[3415](#) FRAME PLUNGER PUMP

[3515](#) FRAME PLUNGER PUMP



[3175](#) FRAME PLUNGER PUMP



[3475](#) FRAME PLUNGER PUMP



[3575](#) FRAME PLUNGER PUMP




[2813](#) FRAME PISTON PUMP




[2913](#) FRAME PISTON PUMP

[3314](#) FRAME PISTON PUMP


[4314](#) FRAME PISTON PUMP

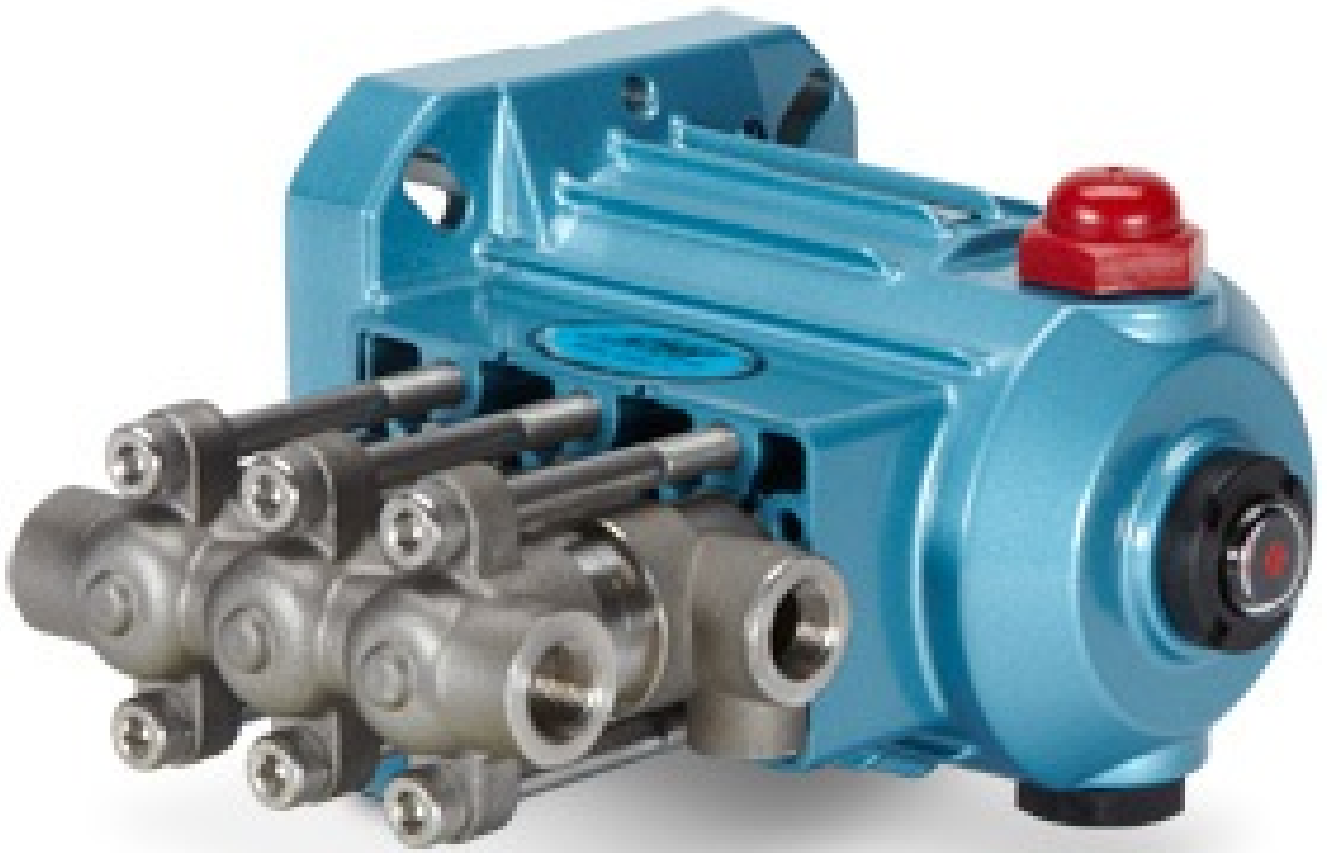


[2SF10SEEL](#) 2SF DIRECT DRIVE PLUNGER PUMPS

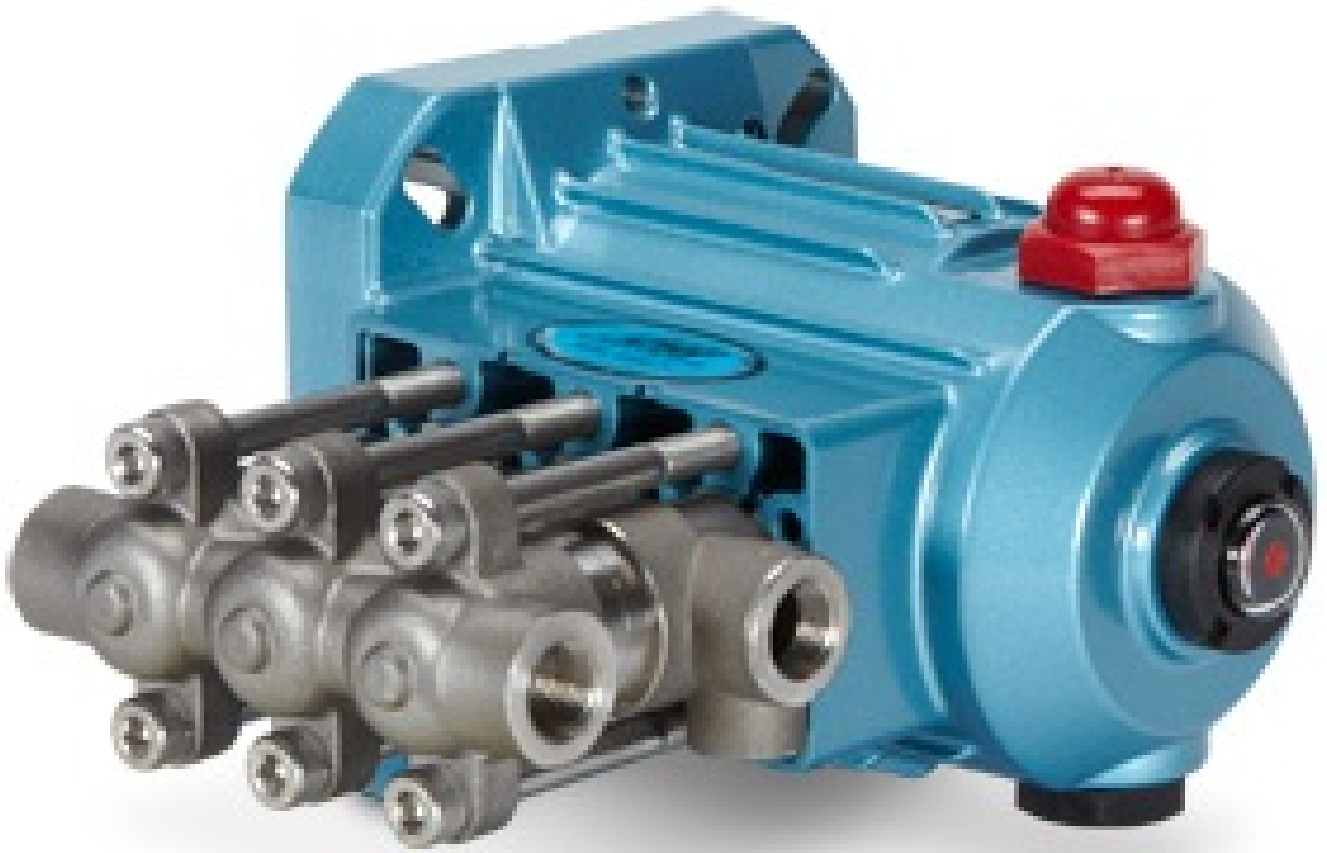

[2SF25SEEL](#) 2SF DIRECT DRIVE PLUNGER PUMPS

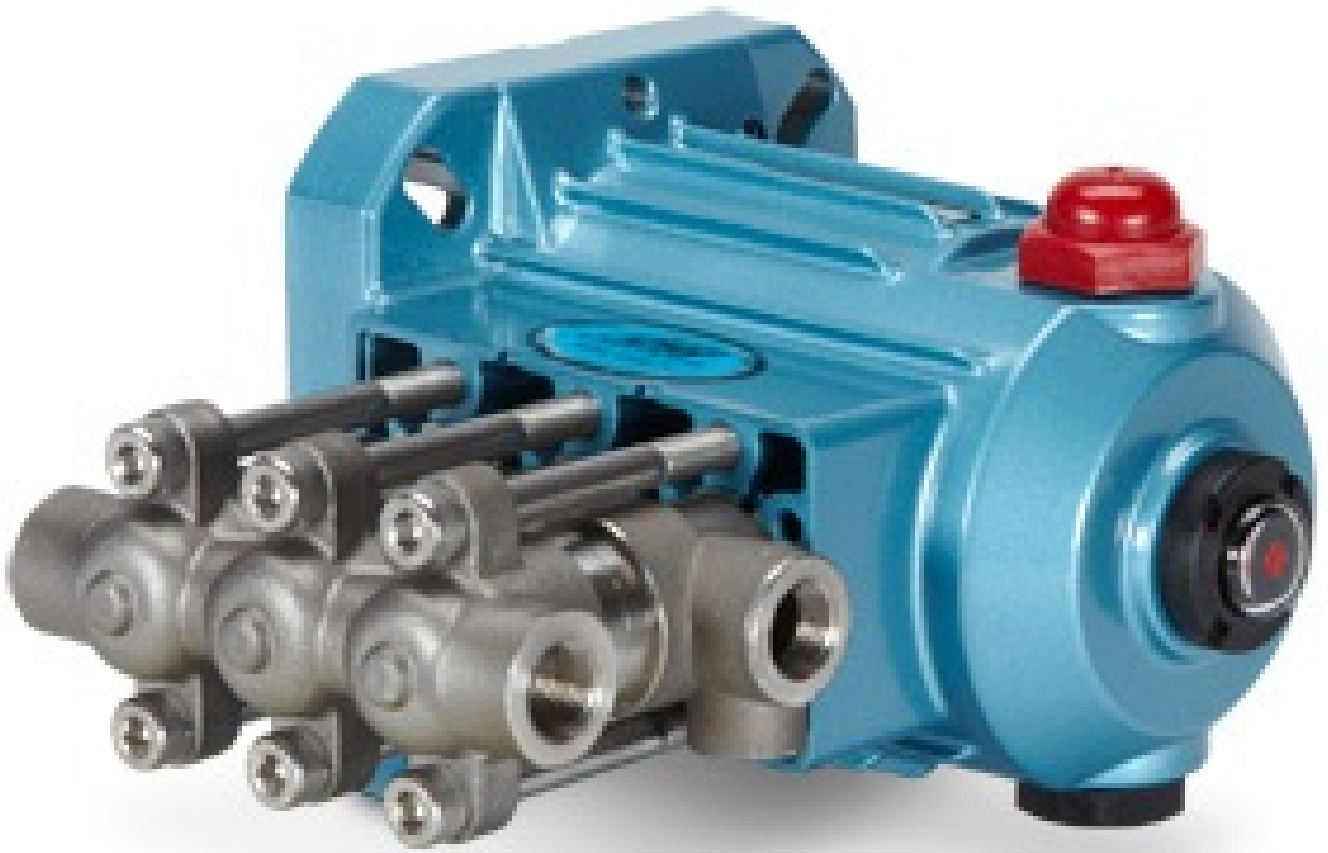

[2SF29SEEL](#) 2SF DIRECT DRIVE PLUNGER PUMPS

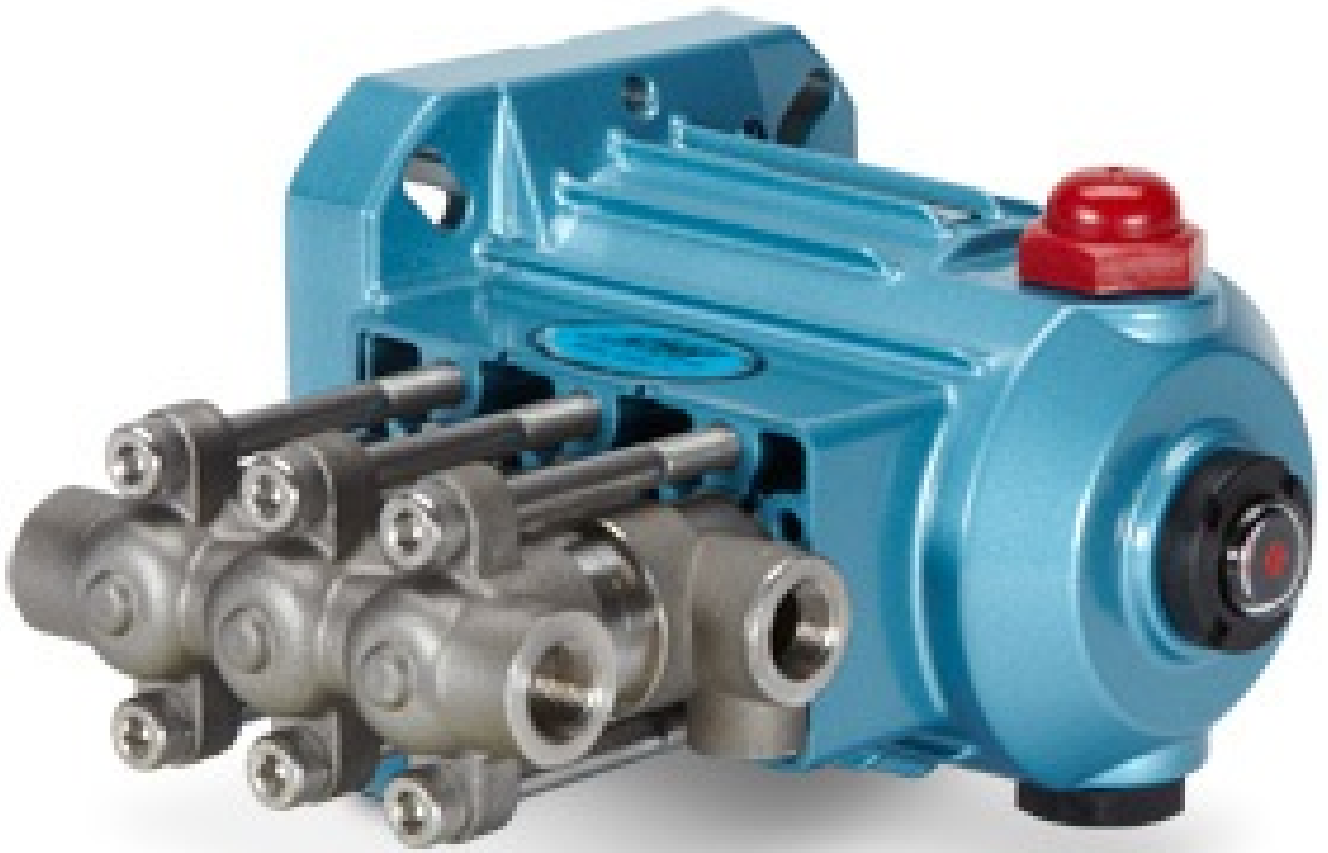


[2SF35SEEL](#) 2SF DIRECT DRIVE PLUNGER PUMPS




[5CP62215CP](#) PLUNGER PUMP



[5CP6241CS](#)5CP PLUNGER PUMP

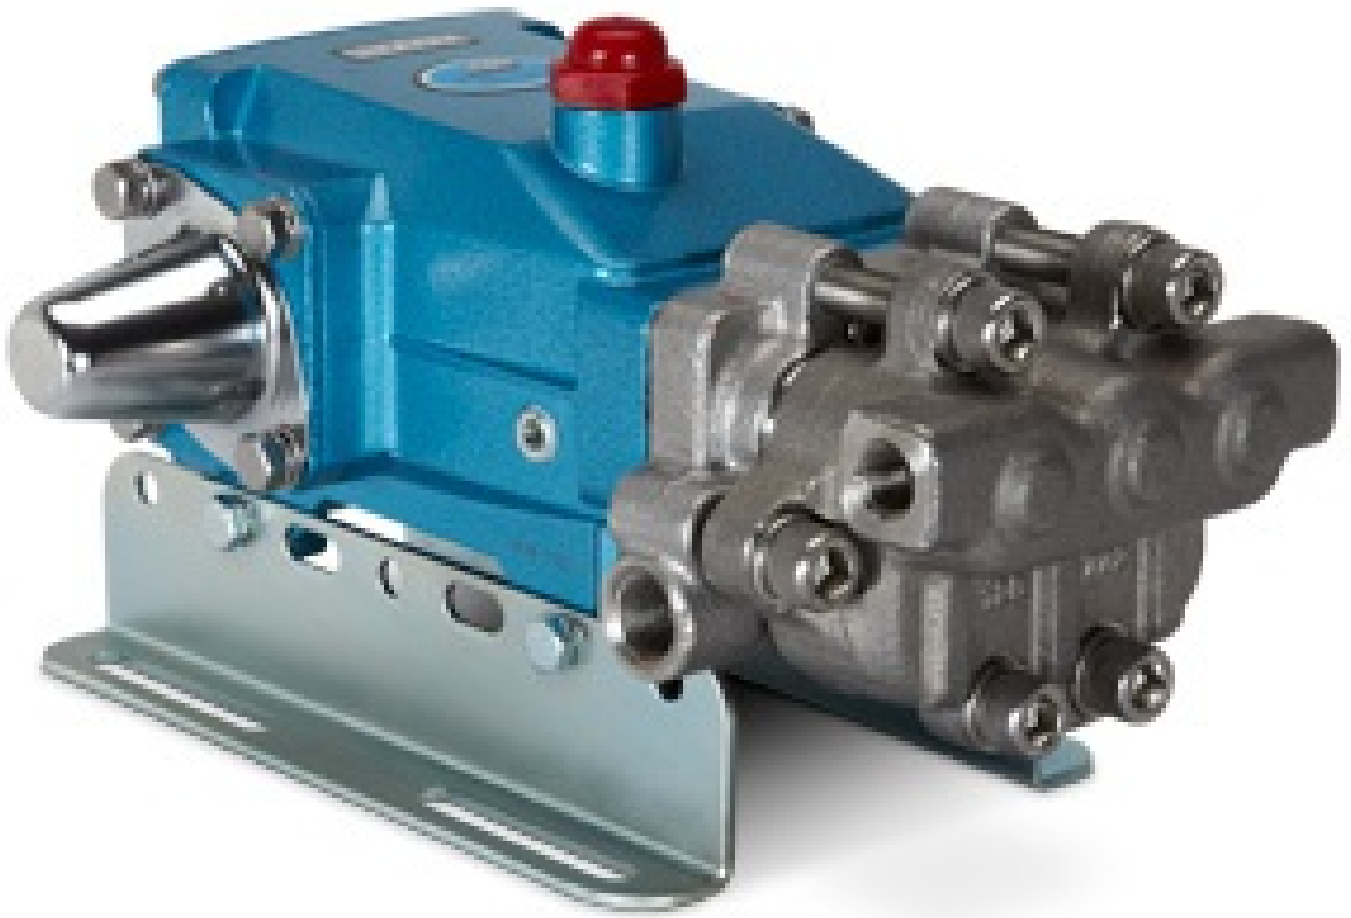


[5CP62515CP](#) PLUNGER PUMP

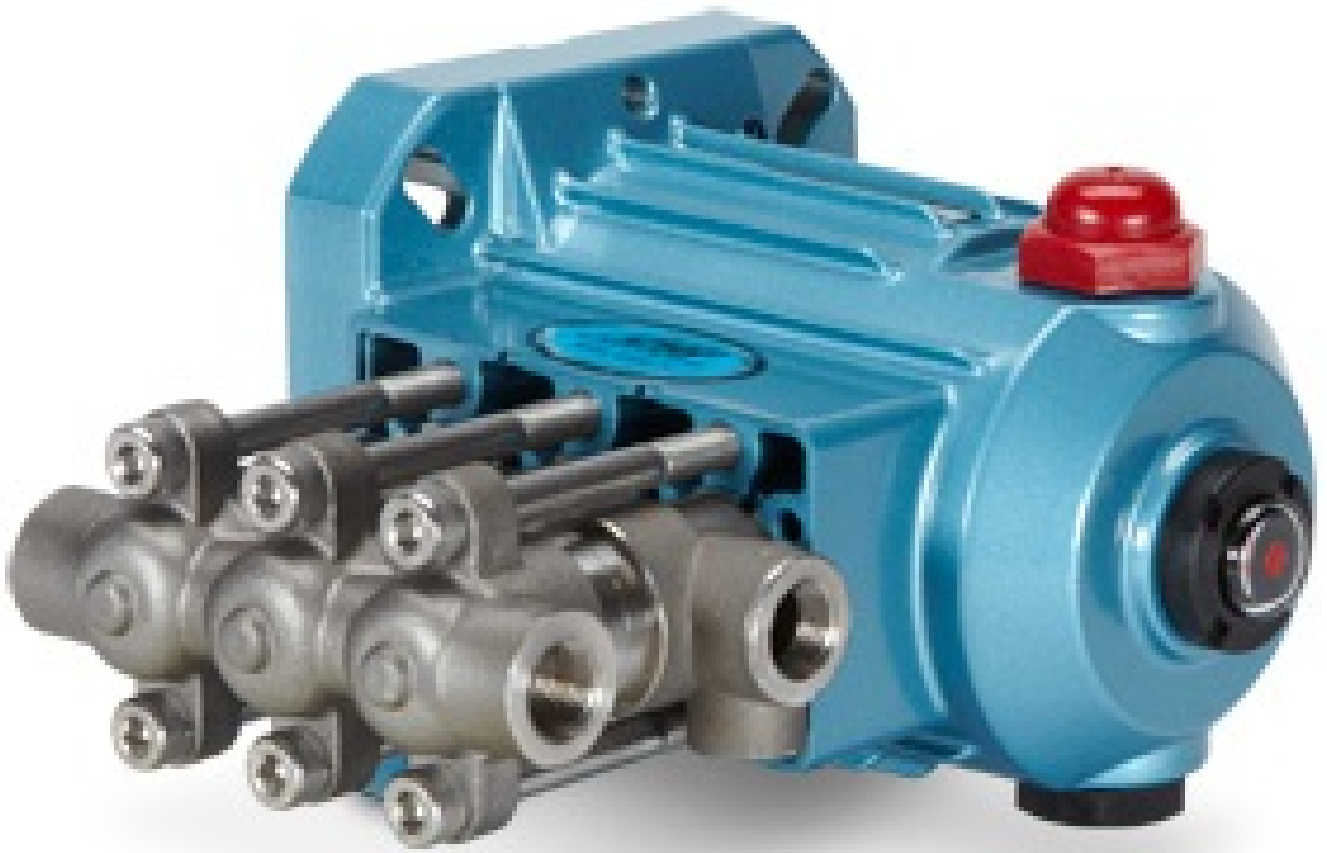

[2SF05SEEL](#) 2SF DIRECT DRIVE PLUNGER PUMPS



[3CP12213CP](#) PLUNGER PUMP

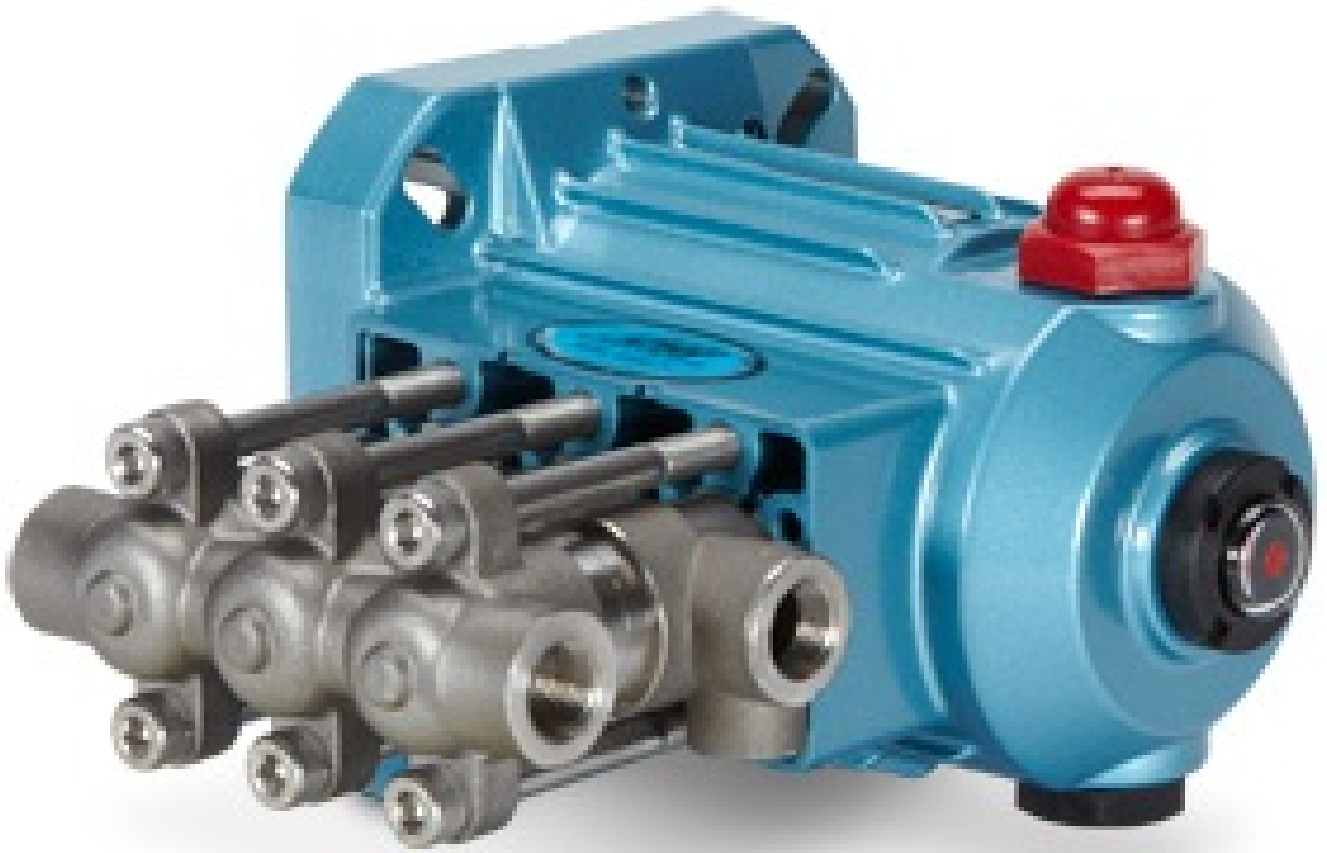

[2SF15SEEL](#) 2SF DIRECT DRIVE PLUNGER PUMPS




[3CP1231](#) 3CP PLUNGER PUMP




[3CP12413CP](#) PLUNGER PUMP



[311C5](#) FRAME FLUSHED PLUNGER PUMP

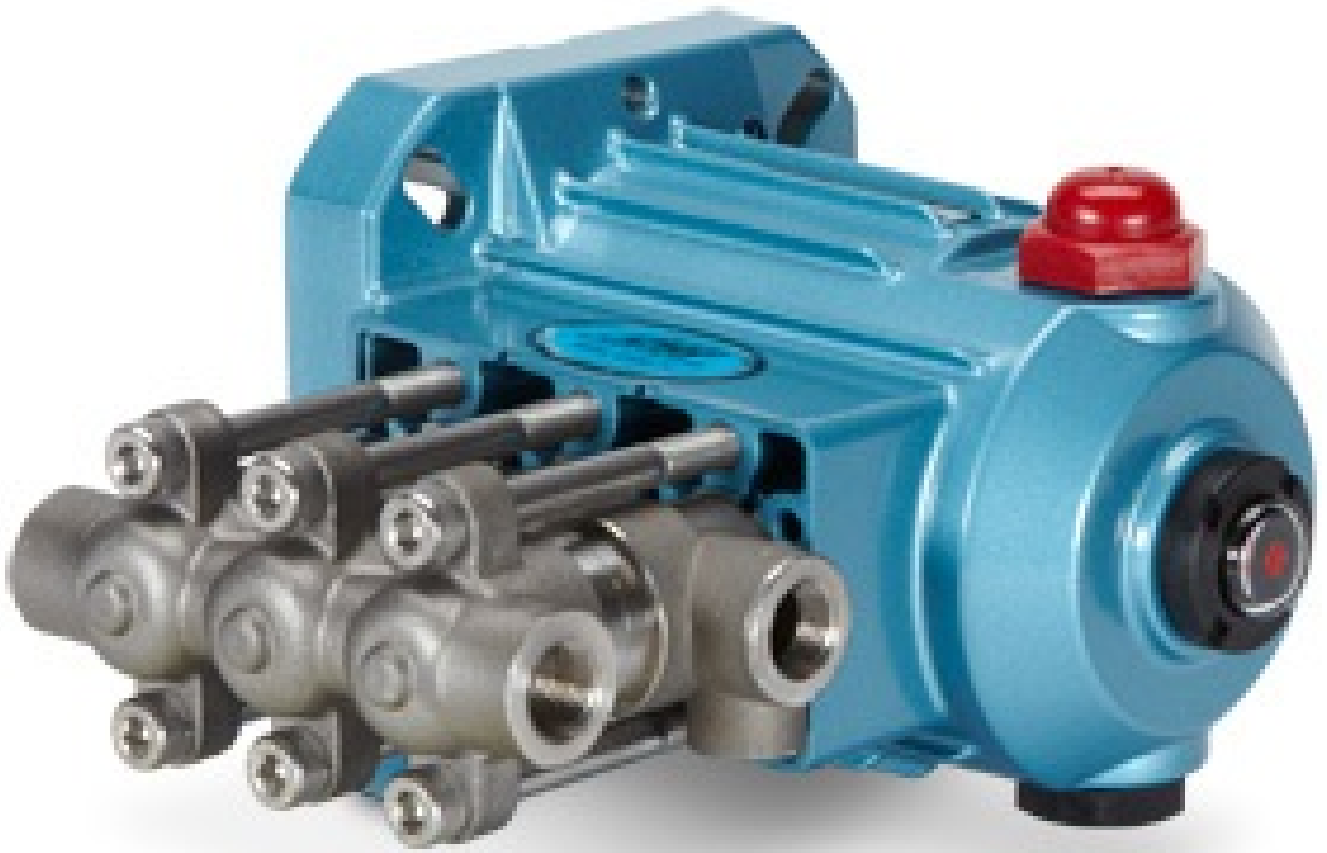

[2SF42SEEL](#) 2SF DIRECT DRIVE PLUNGER PUMPS

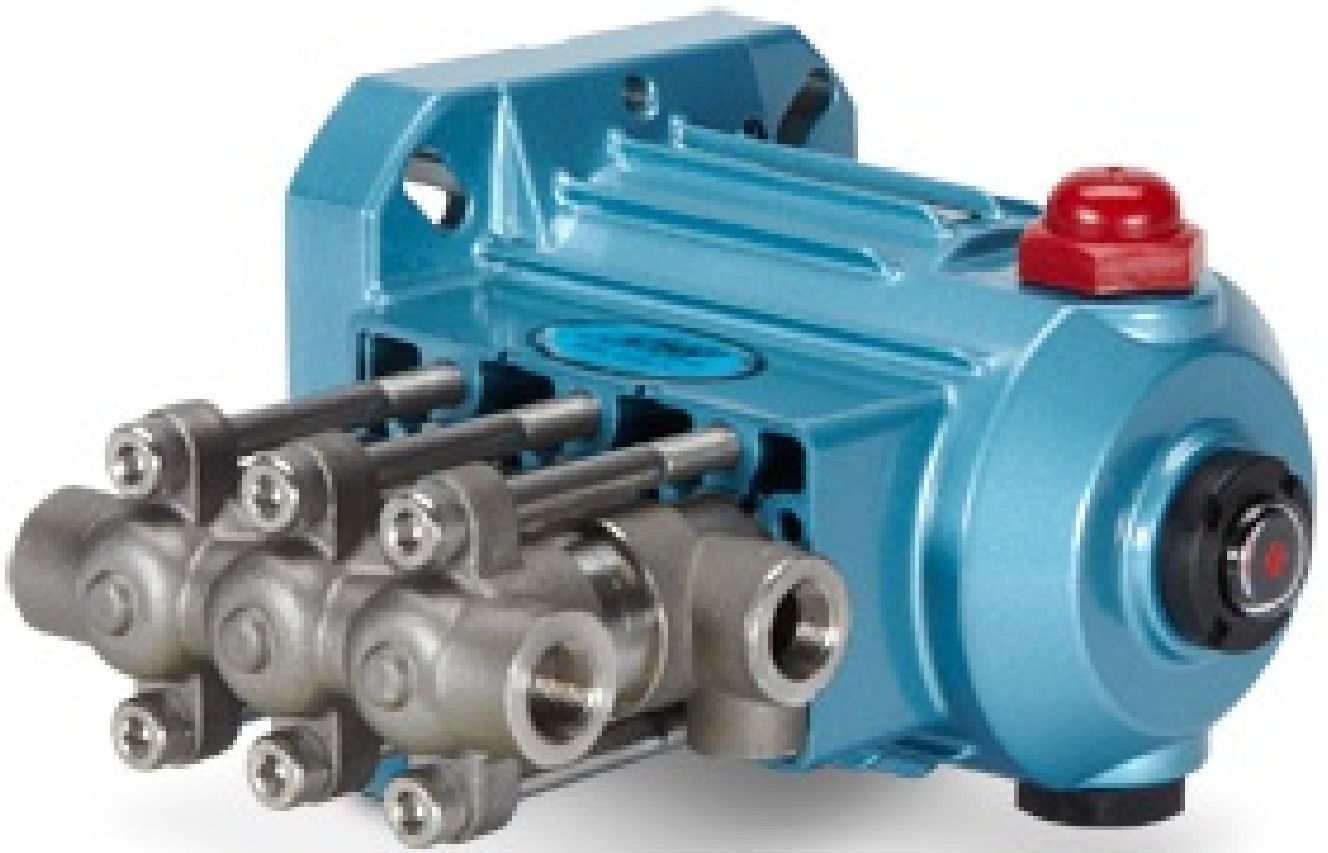

[2SF22SEEL](#) 2SF DIRECT DRIVE PLUNGER PUMPS