

# DEF / ADBLUE® PUMP SYSTEMS & ACCESSORIES FROM THE LEADER IN FUEL TRANSFER





# DF Series | DEF Dispensing Pump Systems

The new DF Series DEF pumps and systems from Fill-Rite provide quick, easy, and safe dispensing. With 8 GPM flow rates, your choice of AC or DC power, and all-in-one systems ready to go right out of the box, pumping Diesel Exhaust Fluid has never been easier.

Whether you pump from an IBC, tote, or drum, there is a DF series system for you.

Options include mounting brackets, hoses, fittings, and nozzles with digital meters pre-attached at the factory. Best of all, it comes from Fill-Rite, so you know it is built for performance and durability. Take control of your DEF use; choose a DF Series system from Fill-Rite, the most trusted name in pumps and meters.



# Pump Features & Benefits

- Rugged Multi-Diaphragm Technology
  - Specifically designed for DEF / AdBlue® dispensing
- Integral Pulsation Dampener Smooth flow at point of use
- 30-Minute Duty Cycle 120V AC or 12V DC
- Self-Priming to 6 Feet Saves time with quick fluid lift
- 8 GPM Flow Rate Ideal dispense rate for most tank sizes
- EPDM Seals Designed, tested and proven specifically for DEF
- Stainless Steel Exterior Hardware Ideal material for DEF / AdBlue®











Automatic Nozzle AC System, RPV

Pump Voltage	120V AC	120V AC	120V AC	120V AC	120V AC
Bracket Type	Cage IBC	Cage IBC	Cage IBC	Cage IBC	Drum
Nozzle Boot & Bracket	Included	Included	Included	Included	Included
Turbine Meter	TT10PB	-	-	-	-
Nozzle Type	Automatic	Automatic	Automatic	Manual	Automatic
Micro Matic® RPV	Included	Included	-	-	-
5' Suction Hose	Included	Included	Included	Included	Included
20' Discharge Hose	Included	Included	Included	Included	Included

(2) 1" BSPP x 34" hose barb 90° elbows, (2) 1" BSPP x 34" hose barb straight fittings, (4) Worm gear hose clamps



**Connections** 

Automatic Nozzle AC System



Manual Nozzle AC System



Drum Mount AC System, Auto Nozzle

# System Component Details

# **Cage Bracket**

- Stainless steel
- Hangs on many types of caged totes
- High capacity hose bracket accommodates 20'

# Drum Bracket (DF120DAN520 only)


- Stainless steel
- Securely mounts to 30 and 55-gallon drums



DF012CAN520-RP



Automatic Nozzle DC System, RPV

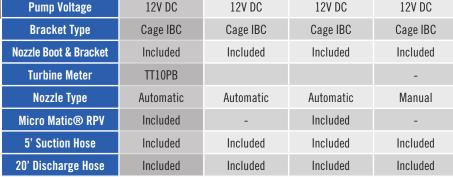

(2) 1" BSPP x ¾" hose barb 90° elbows, (2) 1" BSPP x ¾" hose barb straight fittings, (4) Worm gear hose clamps



**Connections** 



Automatic Nozzle DC System



Manual Nozzle DC System

### **Nozzle Boot**

- Keeps nozzle clean and free of debris
- Nozzle tip submerged in water stays clean
- Removable boot for easy clean-up
- Multiple secure mounting configurations

### Hose

• ¾" EPDM DEF rated

# Nozzle

• Automatic or manual

## Micro Matic® Composite Dispense Coupler (RPV)

(CAT520 and CAN520-RP models only)

- Dispense from drum or IBC
- For use with either RSV or RPV 4-Key Container Valve
- Fast "Turn, Click and Go" connections
- Self-locking handle eliminates accidental disengagement
- Protects fluid purity by allowing dispense only



# DF Series | DEF Accessories



- Automatic DEF nozzle
- Stainless Steel
- 34" BSPP connection



- In-line turbine meter
- 34" SS Hose barb connection w/ swivel



- Manual DEF nozzle
- Non-metallic
- ¾" Hose barb connection



- Non-metallic
- ¾" SS Hose barb connection w/ swivel



# **KITDFCB**

- FILL-RITE IBC/Tote bracket
- Stainless Steel construction including hardware
- Includes nozzle boot and reservoir



# **KITDFDB**

- FILL-RITE Drum bracket
- Stainless Steel construction expands for 30 to 55 gallon drums
- Includes nozzle boot and bracket



# **KITDFNB**

- Nozzle boot and bracket
- · Removable boot for easy clean-up
- Keeps nozzle clean and free of debris



- MMNM075RPV
- Micro Matic® Non-metallic, RPV coupler
- ¾" Horizontal hose barb connection
- For use with either RSV or RPV 4-key container valves



# KIT180DTPS

- 55 Gallon drum drop tube
- ¾" Horizontal hose barb connection
- Vented system



# KITDFH05

- 5' EPDM suction hose 34 inch
- Bare ends for hose barb connection
- DEF rated



# MMSS075EPV

- Micro Matic® Stainless Steel, EPV
- ¾" Horizontal hose barb connection
- For use with 3-key EPV container valves



# MMSS075RSV

- Micro Matic® Stainless Steel, RSV coupler
- ¾" Horizontal hose barb connection
- For use with either RSV or RPV 4-key container valves



# KITDFH20

- 20' EPDM suction hose 34 inch
- Bare ends for hose barb connection
- DEF rated



# **KITDFFK**

- (2) 1" BSPP x 3/4" Hose Barb strait fittings with retaining nuts
- (2) 1" BSPP x 34" Hose Barb 90-degree elbow fittings with retaining nuts
- (4) SS worm gear hose clamps





fillrite.com/def

FRDEFSB\_Rev2



