

a xylem brand

ICS Dimension Print


STAINLESS STEEL, CLOSE-COUPLED CENTRIFUGAL PUMPS 3 HP




ENGINEERING DATA

		Installation Drawing No. 119-61	Certified for construction purposes For Approval For Record By
--	--	---------------------------------------	---

Signature Date



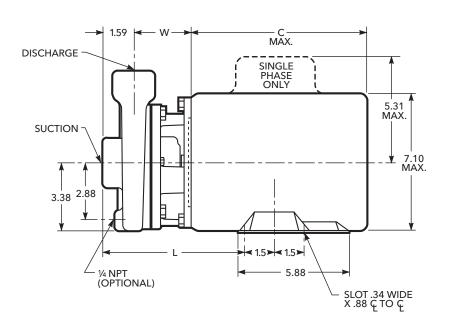

WEIGHTS AND DIMENSIONS - DETERMINED BY PUMP

Pump Size	Suction NPT	Discharge NPT	L	R	w	x	*Weight Max.
1 x 11⁄4-5	11⁄4	1	7.35	.94	3.01	4.62	17
1¼ x 1½-5	1½	11/4	7.22	1.06	2.88	4.56	17

NOTES:

- 1. Pumps will be shipped with top vertical discharge as standard, for other orientations, remove casing bolts, rotate to desired position, and tighten %" bolts to 24 lbs.-ft.
- 2. Dimensions in inches, weight in pounds.
- 3. Not to be used for construction purposes unless certified.
- 4. Motor dimensions may vary with motor manufacturers.
- * Weight is liquid end only. For complete pump, add weight of applicable motor.

AVAILABLE MOTOR WEIGHTS

HP 1 Phase		nase	3 PI	C Max. Length	
	ODP	TEFC	ODP	TEFC	Length
3	40	45	42	37	121/16

Xylem Inc.

2881 East Bayard Street Ext., Suite A, Seneca Falls, NY 13148 Phone: (800) 453-6777 Fax: (888) 322-5877 www.gouldswatertechnology.com

