


**Kanaflex**



# **KANAFLEX HOSE** SM

*Tough enough... and light enough... to take it.*

## **WHEN THE HEAT'S ON...**

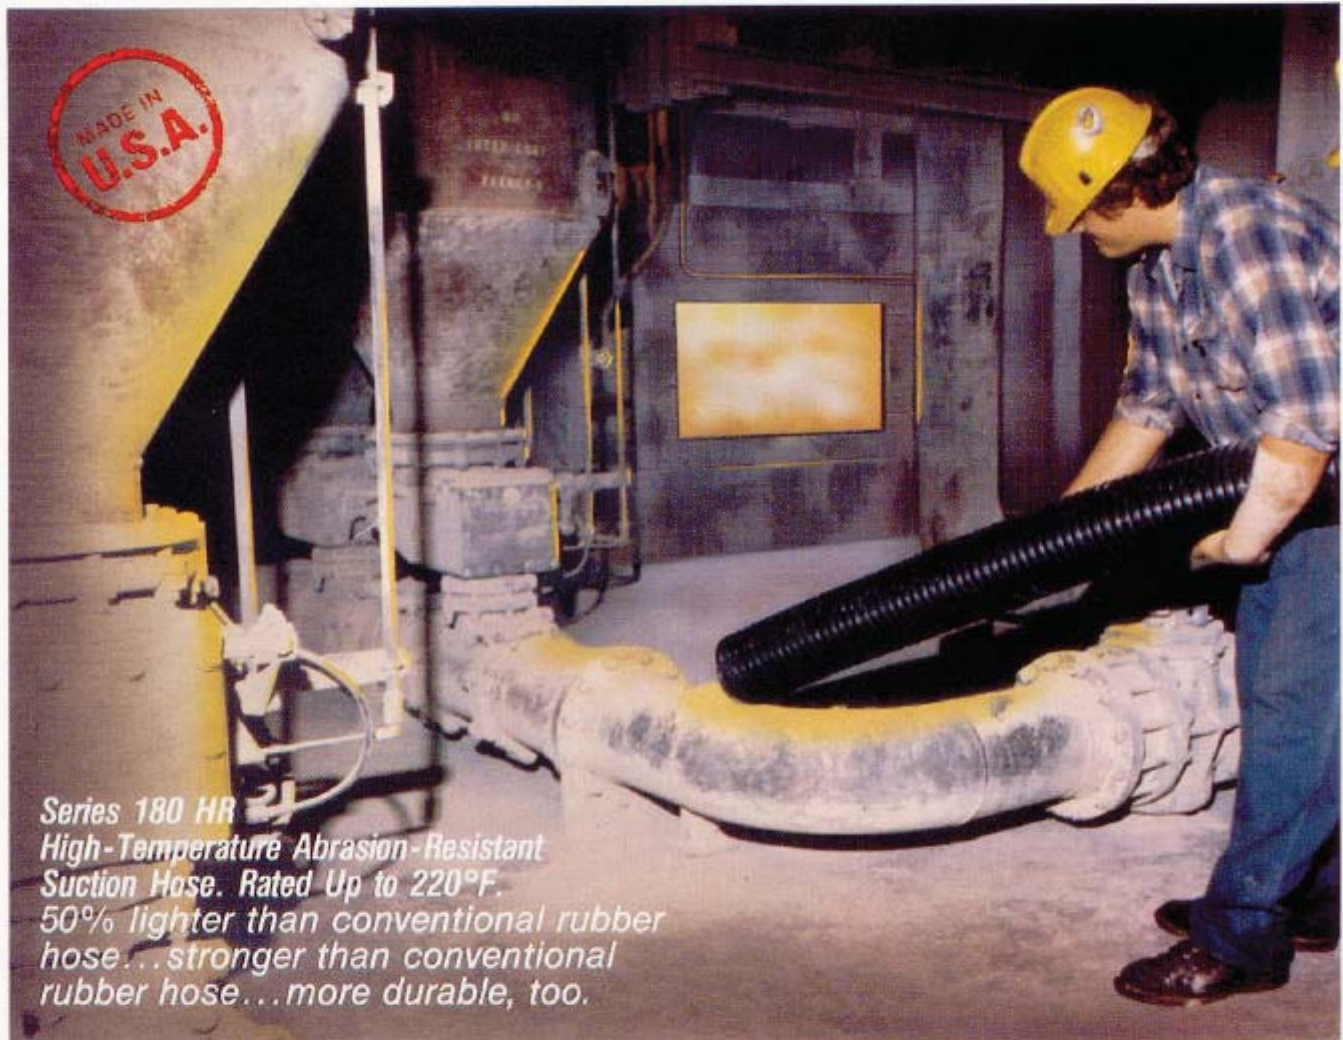



*Series 180 HR  
High-Temperature Abrasion-Resistant  
Suction Hose. Rated Up to 220°F.  
50% lighter than conventional rubber  
hose... stronger than conventional  
rubber hose... more durable, too.*

*Perfect hose for handling...*

- **FLY ASH** • **CRUSHED ROCK** • **SILICA SAND** • **PEA GRAVEL**
- **CEMENT POWDER** • **DRY FERTILIZERS** • **SLURRY**
- **POWDERS** • **IRON ORE** • **GRAINS** • **WOOD CHIPS**
- **PLASTICS** • **COAL DUST**

# Kanaflex®

## SERIES 180 HR HIGH-TEMPERATURE ABRASION-RESISTANT SUCTION HOSE THE BEST HOSE TO DO THE JOB RIGHT.

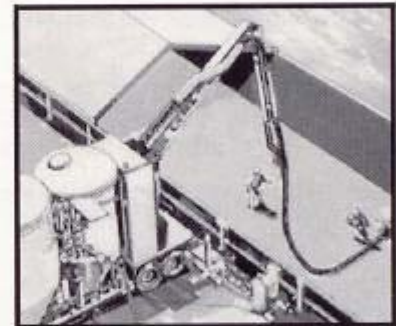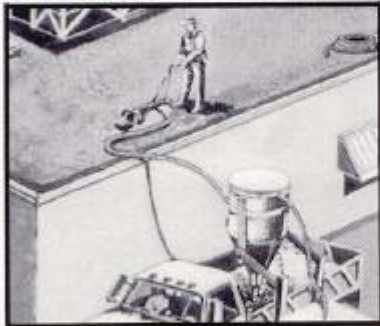


### Serving these industries:

- Roofing • Commercial Cleaning • Grain Handling • Shipyard • Sand Recovery • Fly Ash Removal
- Powerrodding & Sewage Cleaning • Plant Waste Management • Coal Dust • Dockside Unloading

**Lightweight** . . . up to 50% lighter than conventional rubber hose, so it's easier to handle and less expensive to transport.

**Outstanding abrasion resistance** . . . longer lasting than conventional rubber hose inside and out.

**Economical** . . . initial cost is low, and Kanaflex is almost maintenance-free, to save you money in the long run.

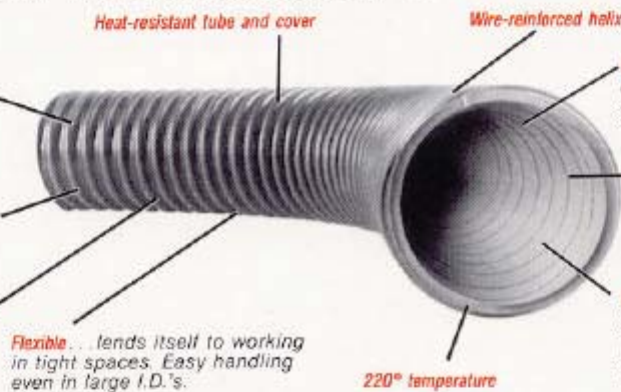

**Flexible** . . . lends itself to working in tight spaces. Easy handling even in large I.D.'s.

**Weatherproof** . . . Kanaflex is highly resistant to temperature changes and deterioration by sun, ozone or mildew.

**Smooth bore** . . . combined with smooth bending characteristics, makes for the fastest, most efficient transfer of materials.

**Static dissipating** . . . needs no groundwire, no electrical shocks (arcing)—no clogging in most applications. (Please consult factory for specific applications.)

### SERIES 180 HR SPECIFICATIONS

INSIDE DIAMETER, Inches	OUTSIDE DIAMETER, Inches	PITCH, Inches	MIN. BENDING RADIUS 72°F, Inches	WORKING PRESSURE 72°F, P.S.I.	BURSTING PRESSURE 72°F, P.S.I.	VACUUM RATING 72°F, In/Hg	WEIGHT Lbs/Ft.
4	4.69	.65	5.5	30	100	29.8	1.77
6	6.77	.87	9.8	30	100	28.0	3.50
8	9.13	.87	15.0	30	100	27.0	6.10

**Kanaflex®**  
CORPORATION

800 Woodlands Parkway  
Vernon Hills, IL 60061

DISTRIBUTED BY: