

Non-Conductive High Oil-Resistant General Service Hose

A high quality hose to handle oil, diesel, fuel oil and other petroleum products

- **LONG LENGTHS ON REELS**
- **HIGH OIL RESISTANCE (CLASS A) RATED TUBE AND COVER**
- **NON-CONDUCTIVE - TESTED TO EXCEED MINIMUM ELECTRICAL RESISTANCE GREATER THAN ONE (1) MEGOHM PER INCH OF HOSE LENGTH AT 1000 VOLTS DC**

Cover: Red Class A Nitrile / PVC

Reinforcement: Spiral polyester yarn


Tube: Black Class A Nitrile

Oil Resistance: High

Branding: REDI-MAX HIGH OIL RESIST.-SIZE-WP-MADE IN USA

Packaging: Maximum 2Pcs on Reel

* Cut lengths of 50 or 100 feet available

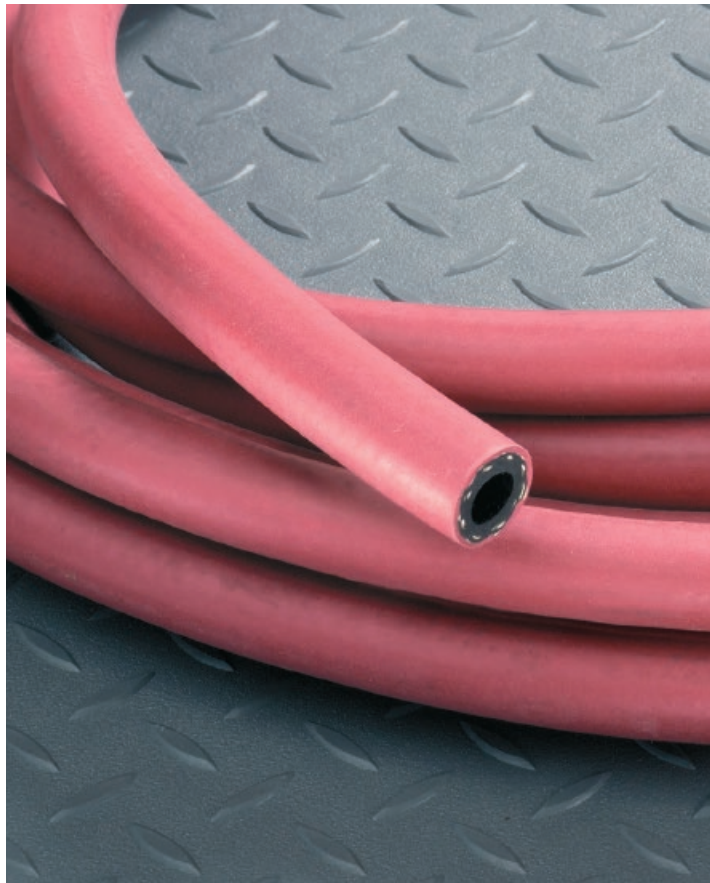

Service Temperature Range - 20° F (-29° C) to +180° F (+82° C)

Nominal Specifications

Part Number	Color	ID (in.)	OD (in.)	Working Pressure (PSI)	Reel Length (ft.)	Approx. Weight (lbs/pc)
REDIMAX-025x700	Red	1/4	0.62	300	700	112
REDIMAX-038x700	Red	3/8	0.69	300	700	126
REDIMAX-050x700	Red	1/2	0.84	300	700	175
REDIMAX-075x700	Red	3/4	1.15	300	700	294
REDIMAX-100x700	Red	1	1.43	300	700	441
REDIMAX-125x500	Red	1 1/4	1.78	250	500	405
REDIMAX-150x400	Red	1 1/2	2.03	250	400	380

BECAUSE WE CONTINUALLY EXAMINE WAYS TO IMPROVE OUR PRODUCTS, WE RESERVE THE RIGHT TO ALTER SPECIFICATIONS OR DISCONTINUE PRODUCTS WITHOUT PRIOR NOTICE.