



NORTH AMERICAN FIRE HOSE

The difference is...*your* margin of safety.


P-300-S™

EPDM Rubber Lining / Polyester Single Jacket

P-300-S™ FEATURES

- **Poly-Cord™** ring spun polyester warp yarns are combined with filament polyester filler yarns.
- The EPDM rubber lining is unaffected by Ozone deterioration.
- It is designed for Emergency Fire Protection with water pressures not exceeding 135 PSI per NFPA 1961.
- Immune to the effects of mildew and rot, requiring less maintenance after use.
- The **Dura-Bond™** vulcanized adhesion system, which creates both a mechanical and chemical bond between the EPDM lining and the jacket reduces the probability of delamination as is experienced with competitive adhesive bonded rubber lined constructions.
- The hose is made and assembled in the USA, available with either imported or domestic couplings in aluminum or brass. Performance shall meet and exceed NFPA 1961 Standards.

Available in 50, 75 and 100 foot lengths

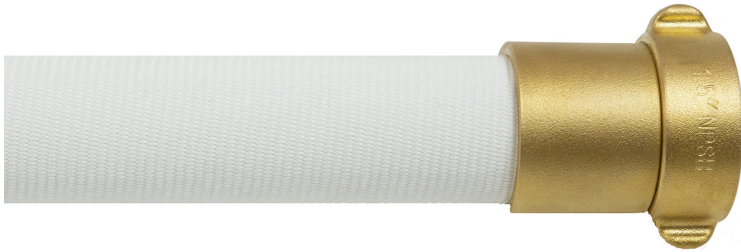

 **FAMILY OWNED
AMERICAN MADE**

**Available with Factory Mutual and Underwriter's Label

HOSE SIZE	SPECIFICATION NUMBER	ACCEPTANCE TEST PSI	SERVICE TEST PSI	BOWL SIZE	WEIGHT PER 50' UNCPLD
1½"	P-300-S**	300 PSI *	150 PSI	1¾"	11 lbs.
2½"	P-300-S**	300 PSI *	150 PSI	2¼"	21 lbs.

P-300-S,™ Poly-Cord,™ and Dura-Bond™ are all trademarks of North American Fire Hose Corporation. All rights reserved.

Revision 2019A

NORTH AMERICAN FIRE HOSE

910 East Noble Way • Santa Maria, CA 93454

Tel: 805.922.7076 • Fax: 805.922.0086

NAFHC.com

