

Specifications

Port Sizes	½", 1"
Thread Styles	NPT
Flow Capacity	60/90/150 SCFM @ 100 PSI
Filter Capacity	1.0 micron & larger
Differential Pressure	< 3.0 PSID at rated flow
Max. Temp./Pressure	175 °F/200 PSIG
Approx. Weight (lb.)	7.0/10.0/10.0
ISO Class	2 Particulate

For higher pressure stainless steel applications, please consult factory.




NACE Compliant

Water
Dirt
Oil
Oil Vapor
Odor

Replacement Parts & Accessories

Description	Part Number
A Replacement Element	3P-060/3P-090/3P-150
B Manual Drain	SV1-3/8
C Automatic Float Drain	N32-95-973-FG
D Bowl O-ring (60)	KSG-171
D Bowl O-ring (90/150)	KSG-176
Mounting Bracket (Optional)	BK-1

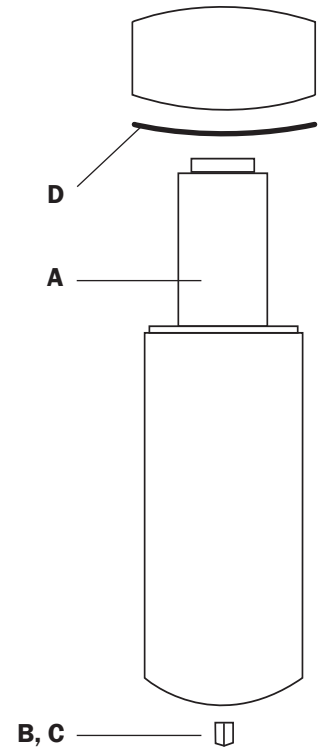


Order Guide

	Port Size	Model Number	Dimensions (in.)		
			Height	Width	Depth
Manual Drain	½"	3P-060-S04-P	12.0	3.0	3.3
	1"	3P-090-S08-P	16.6	3.8	4.0
	1"	3P-150-S08-P	16.6	3.8	4.0
Automatic Drain	½"	3P-060-S04-F	11.0	3.0	3.3
	1"	3P-090-S08-F	15.6	3.8	4.0
	1"	3P-150-S08-F	15.6	3.8	4.0

Specifications

Port Sizes	½", 1"
Thread Styles	NPT
Flow Capacity	60/90/150 SCFM @ 100 PSI
Filter Capacity	0.01 micron & larger
Differential Pressure	< 3.0 PSID at rated flow
Max. Temp./Pressure	150 °F/250 PSIG
Approx. Weight (lb.)	14.0/20.0/20.0
ISO Class	1 Particulate/Oil

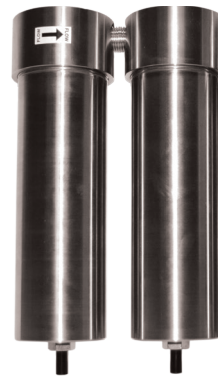


Water
Dirt
Oil
Oil Vapor
Odor

For higher pressure stainless steel applications, please consult factory.

NACE Compliant

Replacement Parts & Accessories

Description	Part Number
A Replacement Element, 1st Stage	3P-060/3P-090/3P-150
B Replacement Element, 2nd Stage	3C-060/3C-090/3C-150
C Manual Drain	SV1-3/8
D Automatic Float Drain	N32-95-973-FG
E Bowl O-ring (60)	KSG-171
E Bowl O-ring (90/150)	KSG-176
Mounting Bracket (Optional)	BK-1

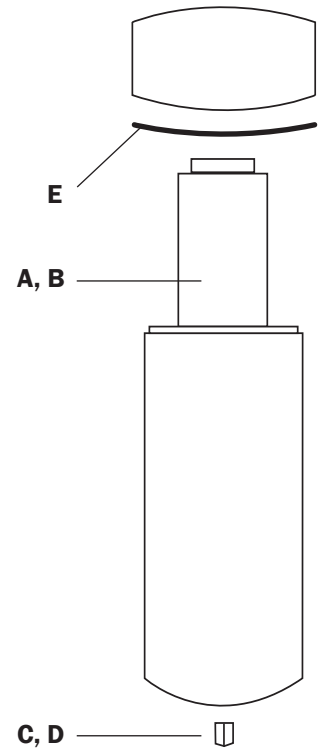

Order Guide

	Port Size	Model Number	Dimensions (in.)		
			Height	Width	Depth
Manual Drain	½"	3P-060-S04-DCP	12.0	6.4	3.3
	1"	3P-090-S08-DCP	16.6	7.8	4.0
	1"	3P-150-S08-DCP	16.6	7.8	4.0
Automatic Drain	½"	3P-060-S04-DC	11.0	6.4	3.3
	1"	3P-090-S08-DC	15.6	7.8	4.0
	1"	3P-150-S08-DC	15.6	7.8	4.0



Specifications

Port Sizes	½", 1"
Thread Styles	NPT, BSPT, BSPP
Flow Capacity	60/90/150 SCFM @ 100 PSI
Filter Capacity	1.0 micron & larger (Single Stage) 0.01 micron & larger (Combo) Activated Carbon Oil Adsorption to 0.003 PPM
Differential Pressure	< 3.0 PSID at rated flow
Max. Temp./Pressure (Manual Drain)	150 °F/250 PSIG
Max. Temp./Pressure (Auto Float Drain)	125 °F/150 PSIG
Approx. Weight (lb.)	7.0/10.0/10.0 (Single Stage) 14.0/20.0/20.0 (Combo)
ISO Class	1 Particulate/Oil

For higher pressure stainless steel applications, please consult factory.




NACE Compliant

Water
Dirt
Oil
Oil Vapor
Odor

Replacement Parts & Accessories

Description	Part Number
A Replacement Element, 1st Stage	4P-060/4P-090/4P-150
B Replacement Element, 2nd Stage (Combo Unit)	3C-060/3C-090/3C-150
C Manual Petcock Drain	SV1-3/8
D Automatic Float Drain	N32-95-973-FG
E Bowl O-ring (60)	KSG-171
E Bowl O-ring (90/150)	KSG-176
Mounting Bracket (Optional)	BK-1

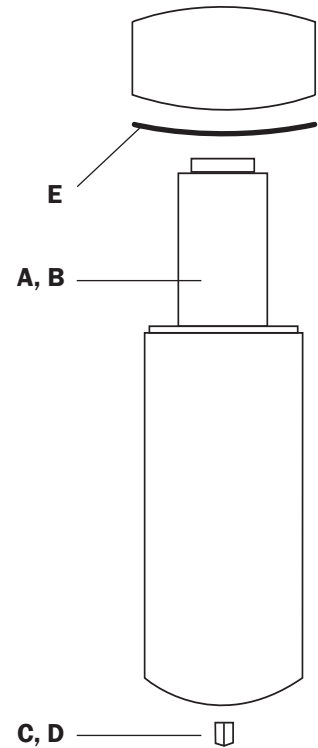

Order Guide

	Port Size	Model Number	Dimensions (in.)		
			Height	Width	Depth
Manual Drain	½"	4P-060-S04-P	12.0	3.0	3.3
	1"	4P-150-S08-P	16.6	3.8	4.0
Manual Drain COMBO	½"	4P-060-S04-DCP	12.0	6.4	3.3
	1"	4P-090-S08-DCP	16.6	7.8	4.0
	1"	4P-150-S08-DCP	16.6	7.8	4.0
Automatic Drain	½"	4P-060-S04-F	11.0	3.0	3.3
	1"	4P-150-S08-F	15.6	3.8	4.0
Automatic Drain COMBO	½"	4P-060-S04-DC	11.0	6.4	3.3
	1"	4P-090-S08-DC	15.6	7.8	4.0
	1"	4P-150-S08-DC	15.6	7.8	4.0

Literature Sheet: i002, i062



Specifications

Port Sizes	½", 1"
Thread Styles	NPT, BSPT, BSPP
Flow Capacity	60/90/150/250 SCFM @ 100 PSI
Filter Capacity	0.01 micron & larger
Differential Pressure	< 3.0 PSID at rated flow
Max. Temp./Pressure (Manual Drain)	150 °F/250 PSIG
Max. Temp./Pressure (Auto Float Drain)	125 °F/150 PSIG
Approx. Weight (lb.)	7.0/10.0/10.0/10.0
ISO Class	1 Particulate/Oil

For higher pressure stainless steel applications, please consult factory.




NACE Compliant

Water
Dirt
Oil
Oil Vapor
Odor

Replacement Parts & Accessories

Description	Part Number
A Replacement Element	3C-060/3C-090/3C-150/3C-250
B Manual Petcock Drain	SV1-3/8
C Automatic Float Drain	N32-95-973-FG
D Bowl O-ring (60)	KSG-171
D Bowl O-ring (90/150/250)	KSG-176
Mounting Bracket (Optional)	BK-1

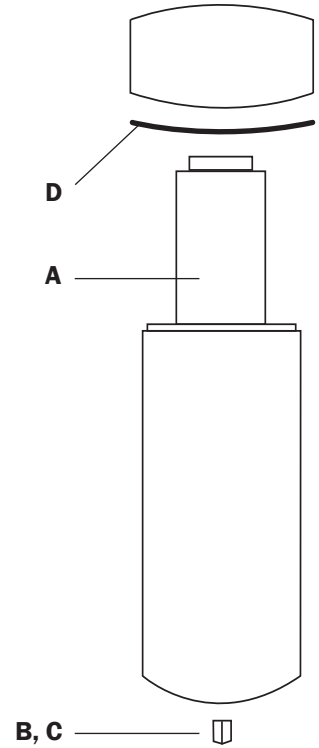

Order Guide

	Port Size	Model Number	Dimensions (in.)		
			Height	Width	Depth
Manual Drain	½"	3C-060-S04-P	12.0	3.0	3.3
	1"	3C-090-S08-P	16.6	3.8	4.0
	1"	3C-150-S08-P	16.6	3.8	4.0
	1"	3C-250-S08-P	16.6	3.8	4.0
Automatic Drain	½"	3C-060-S04-F	11.0	3.0	3.3
	1"	3C-090-S08-F	15.6	3.8	4.0
	1"	3C-150-S08-F	15.6	3.8	4.0
	1"	3C-250-S08-F	15.6	3.8	4.0

