



# INDUSTRIAL HOSE

TEXCELINDUSTRIAL.COM



**Ahead Of The Curve.**

Founded in 1981, Texcel offers a full line of industrial hose, fluid sealing products and hydraulic solutions.

Backed by “The Texcel Guarantee,” Texcel has become known for delivering exceptional customer support and providing in-depth inventory of leading edge products to respond to customer demand—whether a quick solution to fill a product gap or as a full line supplier. Texcel’s commitment to making a difference for customers is evident in every aspect of the business—particularly in building partnerships of trust to support customers’ success.

Texcel’s customers have access to a full line of high-quality products and the same error-free service and personalized support they have come to expect from Texcel for more than 35 years.





### **100% SAME-DAY SHIPPING\***

By ordering from Texcel, there are no delays in shipping your stock and priority orders, meaning your shipment arrives faster for orders received by 5 p.m. CST.



### **24-HOUR RESPONSE TEAM**

Whether you have an emergency or simply need dependable products quickly, our team is available around the clock to make sure you receive the products and services you need.



### **LARGE INVENTORY**

We keep deep product inventories, which are strategically located at our regional warehouses, so you will always have the product you need, when you need it most.

**\*Subject to carrier availability**



# TABLE OF CONTENTS



## PETROLEUM

<b>TEX-FUEL</b> , Fuel Transfer Hose	07
<b>TEX-F.O.D.</b> , Fuel Oil Delivery Hose	08
<b>HBR4</b> , Low Pressure Suction/Return Hose	10
<b>TEX-OVAC</b> , Oilfield Suction Hose	11
<b>GAMMA™-FLEX OVAC</b> , Corrugated Oilfield Suction Hose	12
<b>TEX-FRAC</b> , Frac Tank Hose	13
<b>TEX-OIL-D</b> , 200psi Oil Discharge Hose	15
<b>GAMMA™-RED OIL</b> , Oil Delivery Hose	16
<b>GAMMA™-BLEND</b> , 400psi Blender/Fracturing Hose	17
<b>GAMMA™-MULTI OIL</b> , 500psi Multi-Purpose Discharge Hose	18
<b>GAMMA™-RED TANK</b> , Red Tank Truck Hose	19
<b>GAMMA™-FLEX RED TANK</b> , Red Corrugated Tank Truck Hose	20
<b>GAMMA™-TANK</b> , Tank Truck Hose	21
<b>GAMMA™-FLEX TANK</b> , Corrugated Tank Truck Hose	22
<b>GAMMA™-TANK 300</b> , 300psi Heavy-Duty Tank Truck Hose	23
<b>GAMMA™-flex TANK 300</b> , 300psi Heavy-Duty Corrugated Tank Truck Hose	24
<b>GAMMA™-Flex TANK 500</b> , 500psi Heavy-Duty Corrugated Tank Truck Hose	25
<b>TEX-OSD 250</b> , 250psi Oil Suction & Discharge Hose	26
<b>TEX-OBL</b> , Built-In Flanges Oil Suction & Discharge Assemblies	27
<b>SIGMA-DUTY MAX™</b> , NBR Suction Hose	28
<b>SIGMA-TDG™</b> , Tank Drop Hose	29
<b>SIGMA-TDHD™</b> , Heavy-Duty Tank Drop Hose	30
<b>SIGMA-TD 150™</b> , 150psi Heavy-Duty Tank Drop Hose	31
<b>SIGMA-VRM™</b> , Medium-Duty Yellow Vapor Recovery Hose	32
<b>SIGMA-VRH™</b> , Heavy-Duty Red Vapor Recovery Hose	33
<b>SIGMA-BANDING SLEEVES™</b>	34



## WATER

<b>SIGMA-DUTY MAX™</b> , NBR Suction Hose	35
<b>SIGMA-HD GREEN PVC™</b> , Heavy-Duty Green PVC Water Suction Hose	36
<b>SIGMA-HD CLEAR PVC™</b> , Heavy-Duty Clear PVC Water Suction Hose	37
<b>SIGMA-PB DISCHARGE™</b> , Blue PVC Lay-Flat Discharge Hose	38
<b>SIGMA-RH DISCHARGE™</b> , Heavy-Duty Red PVC Lay-Flat Discharge Hose	39
<b>TEX-MILL</b> , Mill Discharge Hose (Single Jacket)	40
<b>SIGMA-PVC AQUA™</b> , PVC Water Suction Hose	41
<b>SIGMA-CLAMP™</b> , Double Bolt Spiral Clamp	42
<b>TEX-AQUA HD</b> , Heavy-Duty Water Suction & Discharge Hose	43
<b>TEX-FLO 2MD</b> , Medium-Duty 2-Ply Water Discharge Hose	44
<b>TEX-FLO 4HD</b> , Heavy-Duty 4-Ply Water Discharge Hose	45



## CHEMICAL

<b>GAMMA™-FLEX XLPE</b> , Cross-Linked Polyethylene Chemical Hose	46
<b>GAMMA™-FLEX UHMW</b> , Ultra-High Molecular Weight Polyethylene Chemical Hose	48

## AIR

<b>TEX-PUSH-ON 300</b> , 300psi Push-On Hose	49
<b>TEX-MP</b> , Multi-Purpose Air Hose	50
<b>TEX-GS</b> , General Service Air & Water Hose	51
<b>TEX-CONTRACTORS</b> , Banded Contractor's Assembly	52
<b>TEX-CRIMP CONTRACTORS</b> , Heavy-Duty Textile Reinforced Air Hose	53
<b>TEX-MASTER</b> , Heavy-Duty Textile Reinforced Air Hose	54
<b>TEX-KING</b> , Wire Air Hose	55

## MATERIAL HANDLING

<b>SIGMA-POLY-U™</b> , Lightweight Polyurethane Hose	57
<b>SIGMA-FD™</b> , FDA PVC Food Grade Suction Hose	58
<b>SIGMA-FDW™</b> , FDA PVC Grounded Food Grade Suction Hose	59
<b>SIGMA-POLY MHH™</b> , Polyurethane Food Grade Suction & Discharge Hose	60
<b>SIGMA-ULTRAVAC-SBR™</b> , SBR Vacuum Hose	61
<b>SIGMA-ULTRAVAC™</b> , Polyurethane Vacuum Hose	62
<b>SIGMA-URE-B™</b> , Polyurethane Material Handling Hose with PVC Cover	63
<b>SIGMA-URE HD BLUE™</b> , Heavy-Duty Polyurethane Material Handling Hose	65
<b>GAMMA™-HTA</b> , Hot Tar and Asphalt Hose	66
<b>GAMMA™-HEAT</b> , Hot Air Blower Hose	67
<b>GAMMA™-BULK</b> , Dry Bulk Material Discharge Hose	68
<b>TEX-BLAST</b> , Sandblast Hose	69
<b>GAMMA™-COMM DISCHARGE</b> , Commodity Discharge Hose	70
<b>GAMMA™-BLACK COMM</b> , Black Commodity Suction Hose	71
<b>TEX-COMMODITY</b> , FDA Commodity Hose	72
<b>TEX-ELEPHANT</b> , Elephant Trunk Hose	73
<b>TEX-DREDGE</b> , Dredge Sleeve	74
<b>GAMMA™-WIRE CRETE</b> , Wire Concrete Placement Hose	75
<b>TEX-CRETE</b> , Textile Concrete Hose	76
<b>SIGMA-DUTY MAX™</b> , NBR Suction Hose	77

## SANITARY & STEAM

<b>TEX-STEAM</b> , Steam Hose	79
<b>BALTHAZAR™</b> , Winery Hose	80
<b>BALTHAZAR™ HD</b> , Heavy-Duty Winery Hose	81
<b>GROWLER™</b> , Brewery Hose	82
<b>ELIXIR™</b> , Distillery Hose	83
<b>DAIRY-KING™</b> , Milk Hose	84
<b>SIGMA-FD™</b> , FDA PVC Food-Grade Suction Hose	85
<b>SIGMA-FDW™</b> , FDA PVC Grounded Food-Grade Suction Hose	86
<b>TEX-WASHDOWN</b> , 300PSI Washdown Hose	87
<b>TEX-SANITRANS</b> , FDA Sanitary Discharge Hose	88
<b>TEX-SANIVAC</b> , FDA Sanitary Vacuum Hose	89
<b>CORNUCOPIA™</b> , All-Purpose Sanitary Hose	90
<b>TEX-COMMODITY</b> , FDA Commodity Hose	91
<b>SIGMA-POLY MHH™</b> , Polyurethane Food-Grade Suction & Discharge Hose	92
<b>TEX-STEAM™ FDA</b> , Food Grade Steam Hose	93
<b>FDA-BULK</b> , Food Grade Dry Material Discharge Hose	94
<b>FDA-HEAT</b> , FDA Hot Air Blower Hose	95



# TABLE OF CONTENTS





# TEX-FUEL

Fuel Transfer Hose

A multi-use hose for transporting leaded, unleaded, lead substitutes, low-pressure brake fluid or diesel. Used in farm and barrel pump applications, as well as construction and industrial service where UL approval is not required.



## TECHNICAL DATA

Tube	Black, NBR (ARPM Class A)
Cover	Black, SBR/Nitrile blend compounded for oil and ozone resistance
Reinforcement	Braided polyester cords
Safety Factor	3:1
Temperature	-40°F to +190°F
Non-Conductive	1,800 megaOhm @ 1,000 volts
Grounding	Embedded Copper Wire
Branding	TEXCEL® TEX-FUEL - FUEL TRANSFER HOSE - <ID>- 200PSI WP (white ink letters)

# TEX-F.O.D.

Fuel Oil Delivery Hose

Designed for the transfer and delivery of fuels, oils, kerosene, diesel and other petroleum-based products for home, commercial, marine and industrial service. Its braided synthetic reinforcement allows for extreme flexibility, reduced twisting and ease of handling, while maintaining kink resistance. Drivers will prefer this hose because of its abrasion and oil resistance and 250psi working pressures in all sizes.



## TECHNICAL DATA

Tube	Black, NBR (ARPM Class A)
Cover	Red, NBR (ARPM Class A)
Reinforcement	2 braided polyester cords
Safety Factor	4:1
Temperature	-40°F to +180°F
Branding	TEXCEL F.O.D. Fuel Oil Delivery Hose - <ID> - 250PSI WP LOT (white ink letters)

I.D.	Part Number	O.D.	Std. Length	Working Pressure (psi)	Lbs./Coil
3/4"	FU-12-C200-200W-	1-1/16"	200'	200	77.00
1"	FU-16-C200-200W-	1-13/32"	200'	200	104.00

I.D.	Part Number*	O.D.	Std. Length	Working Pressure (psi)	Lbs./Ft.
1"	FOD-16-XXXAF-	1-32/64"	100'/125'/150'/175'	250	0.65
1-1/4"	FOD-20-XXXAF-	1-51/64"	100'/125'/150'/175'	250	0.87
1-3/8"	FOD-22-XXXAF-	1-56/64"	100'/125'/150'/175'	250	0.91
1-1/2"	FOD-24-XXXAF-	2-6/64"	100'/125'/150'/175'	250	1.12

\*Replace XXX in Part Number with standard length required





# TEX-OVAC

Oilfield Suction Hose

Texcel's exclusive design for rugged oilfield service where full suction and working pressures are required.



## TECHNICAL DATA

Tube	Black, specially compounded elastomer low oil swell	
Cover	Black, SBR/Nitrile blend compounded for oil and ozone resistance (smooth)	
Reinforcement	High tensile tire cord plies; helix wire	
Safety Factor	4:1	
Temperature	-20°F to +180°F	
Branding	TEXCEL® TEX-OVAC - OILFIELD SUCTION HOSE NOT FOR REFINED FUELS 150 PSI W.P.	
Safety Note	Not recommended for refined petroleum products	

I.D.	#	O.D.	Std. Length	Working Pressure (psi)	Vacuum (in./HG)	Bend Radius	Lbs./Ft.
1-1/2"	OVAC-1.5	1-7/8"	100'	150	29	6"	0.67
2"	OVAC-2.0	2-7/16"	100'	150	29	7"	0.87
3"	OVAC-3.0	3-1/2"	100'	150	29	9"	1.52
4"	OVAC-4.0	4-9/16"	100'	150	29	14"	3.32

# GAMMA™-FLEX OVAC

Corrugated Oilfield Suction Hose

Texcel's exclusive design for rugged oilfield service where full suction and working pressures are required. Corrugated cover for improved flexibility.



## TECHNICAL DATA

Tube	Black, specially compounded elastomer; low oil swell	
Cover	Black, SBR/Nitrile blend compounded for oil and ozone resistance (flex corrugated)	
Reinforcement	High tensile tire cord plies; helix wire	
Safety Factor	4:1	
Temperature	-20°F to +180°F	
Branding	TEXCEL® GAMMA™-FLEX OVAC - FLEXIBLE OILFIELD SUCTION HOSE NOT FOR REFINED FUELS 150 PSI W.P.	
Safety Note	Not recommended for refined petroleum products	
Features	Exceptional flexibility	

I.D.	#	O.D.	Std. Length	Working Pressure (psi)	Vacuum (in./HG)	Bend Radius	Lbs./Ft.
2"	GOV15F1-2.0	2-15/32"	100'	150	29	2"	1.05
3"	GOV15F1-3.0	3-1/2"	100'	150	29	3"	1.64
4"	GOV15F1-4.0	4-9/16"	100'	150	29	4"	2.58
6"	GOV15F1-6.0	6-5/16"	100'	150	29	8"	4.75







# TEX-FRAC

## Frac Tank Hose

A heavy-duty frac tank hose ideal for handling salt and fresh water, tank bottoms, crude oil, drilling muds and mild solutions of hydrochloric acids.



### TECHNICAL DATA

Tube	Black, specially compounded elastomer; low oil swell	
Cover	Black, SBR/Nitrile blend compounded for oil and ozone resistance (corrugated)	
Reinforcement	High tensile tire cord plies; helix wire	
Safety Factor	4:1	
Temperature	-40°F to +190°F	
Branding	TEXCEL® TEX-FRAC - FRAC TANK HOSE NOT FOR REFINED FUELS 150 PSI W.P.	
Safety Note	Not recommended for refined petroleum products	



I.D.	#	O.D.	Std. Length	Working Pressure (psi)	Vacuum (in./HG)	Bend Radius	Lbs./Ft.
8"	FRAC-8.0-39IN	9"	39.4'	150	25	18"	8.17
8"	FRAC-8.0-100	9"	100'	150	25	18"	8.17

# TEX-FRAC ASSEMBLY

## Frac Tank Hose Assembly

This hose assembly is ideal for handling salt and fresh water, tank bottoms, crude oil, drilling muds and mild solutions of hydrochloric acids. This heavy-duty frac tank hose is assembled with female frac subs and carbon steel sleeves. Its corrugated cover allows for maximum flexibility.



### TECHNICAL DATA

Tube	Black, specially compounded elastomer; low oil swell
Cover	Black, SBR/Nitrile blend compounded for oil and ozone resistance (corrugated)
Reinforcement	High tensile tire cord plies; helix wire
Safety Factor	4:1
Temperature	-40°F to +190°F
Branding	TEXCEL® TEX-FRAC - FRAC TANK HOSE NOT FOR REFINED FUELS 150 PSI W.P.
Safety Note	Not recommended for refined petroleum products .The 39" hose with fittings will have. OAL 43.5" +/- 1"

### FITTINGS TECHNICAL DATA

Threads	General purpose ACME threads
Surface Finish	Machined and oiled
Interior Finish	Black enamel
Size	8"
Weight	18.78 lbs. each
Requirements	Material conforms to DI 65-45-12 requirements
Crimp Sleeves	Carbon steel



FEMALE FRAC SUB ENDS AND CRIMP SLEEVES ALSO SOLD SEPARATELY



I.D.	#	O.D.	OAL	Working Pressure (psi)	Vacuum (in./HG)	Assembled Weight (lbs.)
8"	AS-FRAC-8-43.5-FF	9"	43-1/2"	150	25	69



# TEX-OIL-D

200psi Oil Discharge Hose

Soft-wall discharge hose designed for use on trucks, docks and barges.



## TECHNICAL DATA

Tube	Black, Nitrile, 55% aromatics (ORS)	
Cover	Black, Neoprene	
Reinforcement	4 high tensile tire cord plies	
Safety Factor	4:1	
Temperature	-40°F to +190°F	
Static Grounding	Braided copper wire runs length of hose	
Branding	TEXCEL® TEX-OIL-D - PETROLEUM OIL TRANSFER / DISCHARGE HOSE 200 PSI W.P.	
Safety Note	Not recommend for use on reels	

# GAMMA™-RED OIL

Oil Delivery Hose

Lightweight oil discharge hose for use in a variety of applications where an oil-resistant, soft-wall discharge hose is required.



## TECHNICAL DATA

Tube	Black, fuel and oil-resistant, NBR compound	
Cover	Red, oil, weather and abrasion-resistant EPDM/NR/SBR compound	
Reinforcement	High tensile tire cord plies and static wire	
Safety Factor	3:1	
Temperature	-30°F to +180°F	
Branding	TEXCEL® GAMMA™-RED OIL - OIL DELIVERY HOSE 150 PSI W.P.	
Safety Note	Not recommend for use on reels	

	#				
I.D.	Part Number	O.D.	Std. Length	Working Pressure (psi)	Lbs./Ft.
1-1/2"	OIL-D-1.5	2"	100'	200	0.96
2"	OIL-D-2.0	2-1/2"	100'	200	1.12
3"	OIL-D-3.0	3-1/2"	100'	200	1.89
4"	OIL-D-4.0	4-17/32"	100'	200	2.68
6"	OIL-D-6.0	6-27/32"	100'	200	5.89
8"	OIL-D-8.0	9-1/8"	100'	200	7.86

	#				
I.D.	Part Number	O.D.	Std. Length	Working Pressure (psi)	Lbs./Ft.
2"	GRO15S1-2.0	2-1/2"	100'	150	0.86
3"	GRO15S1-3.0	3-1/2"	100'	150	1.24
4"	GRO15S1-4.0	4-17/32"	100'	150	1.73





## GREEN INITIATIVES

As leaders in the industry, we feel obligated to do our part to protect our natural resources. Our sustainability efforts begin in the research and development phase and extend to creating innovative ways to recycle and reuse our products. We recycle all of our used materials, including fittings, bands and straps, and have a corporate paper recycling program.

# GAMMA™-BLEND

400psi Blender/Fracturing Hose

A rugged hose designed for blender/fracturing operations in oilfield and gas exploration applications. The abrasion-resistant cover is constructed to withstand extended exposure to harsh, abrasive conditions typically seen in oilfield fracturing operations. Designed for the transfer of 98% water and sand mixtures, oil slurries and crude oil.



### TECHNICAL DATA

Tube	Black, fuel and oil-resistant, NBR compound	
Cover	Black, abrasion-resistant, SBR/Nitrile blend compound*	
Reinforcement	High tensile strength tire cord plies	
Safety Factor	4:1	
Temperature	-30°F to +180°F	
Branding	TEXCEL® GAMMA™-BLEND - BLENDER / FRACTURING DISCHARGE HOSE 400 PSI W.P.	

\*Additional UHMW heavy-duty cover application available for special order.

I.D.	#	O.D.	Std. Length	Working Pressure (psi)	Lbs./Ft.
4"	GBF40S1-4.0	4-4 <sup>9</sup> / <sub>64</sub> "	100'/200'	400	3.02

# GAMMA™-MULTI OIL

500psi Multi-Purpose Discharge Hose

This heavy-duty discharge hose can be used in a variety of applications in severe conditions such as oil waste, drilling muds, high pressure water or fracturing.



### TECHNICAL DATA

Tube	Black, fuel and oil-resistant, NBR compound	
Cover	Black, oil, weather and abrasion-resistant NR/SBR compound	
Reinforcement	High tensile tire cord plies; static wire	
Safety Factor	4:1	
Temperature	-30°F to +180°F	
Branding	TEXCEL® GAMMA™-MULTI OIL - MULTIPURPOSE DISCHARGE HOSE 500 PSI W.P.	

I.D.	#	O.D.	Std. Length	Plies	Working Pressure (psi)	Lbs./Ft.
2"	GMO50S1-2.0	2-9 <sup>1</sup> / <sub>16</sub> "	100'/200'	4	500	1.22
3"	GMO50S1-3.0	3-4 <sup>3</sup> / <sub>64</sub> "	100'/200'	6	500	2.15
4"	GMO50S1-4.0	4-2 <sup>5</sup> / <sub>32</sub> "	100'/200'	8	500	3.31
5"	GMO50S1-5.0	5-1 <sup>3</sup> / <sub>16</sub> "	100'/200'	8	500	4.97





# GAMMA™-RED TANK

Red Tank Truck Hose

The industry standard for tank truck, in-plant and oilfield loading operations requiring a strong yet flexible hose. Red cover for easy identification.



## TECHNICAL DATA

Tube	Black, Nitrile, 55% aromatics (ORS)	
Cover	Red, Neoprene (smooth)	
Reinforcement	High tensile tire cord plies; helix wire	
Safety Factor	4:1	
Temperature	-40°F to +180°F	
Branding	TEXCEL® GAMMA™-RED TANK - RED TANK TRUCK HOSE 150 PSI W.P.	



I.D.	#	O.D.	Std. Length	Working Pressure (psi)	Vacuum (in./HG)	Bend Radius	Lbs./Ft.
2"	RTA15S1-2.0	2-29/64"	100'/200'	150	29	8"	1.10
3"	RTA15S1-3.0	3-1/2"	100'/200'	150	29	13"	1.79
4"	RTA15S1-4.0	4-9/16"	100'/200'	150	29	19"	2.64

# GAMMA™-FLEX RED TANK

Red Corrugated Tank Truck Hose

A world-class hose for tank truck, in-plant and oilfield loading operations requiring a strong yet flexible hose. Red cover for easy identification. Exceptional flexibility (one-to-one ratio) for ease of handling.



## TECHNICAL DATA

Tube	Black, Nitrile, 55% aromatics (ORS)	
Cover	Red, Neoprene (flex corrugated)	
Reinforcement	High tensile tire cord plies; helix wire	
Safety Factor	4:1	
Temperature	-40°F to +180°F	
Branding	TEXCEL® GAMMA™-FLEX RED TANK - FLEXIBLE RED TANK TRUCK HOSE 150 PSI W.P.	
Features	Exceptional flexibility	



I.D.	#	O.D.	Std. Length	Working Pressure (psi)	Vacuum (in./HG)	Bend Radius	Lbs./Ft.
1-1/2"	RTA15F1-1.5	1-63/64"	100'/200'	150	29	1.5"	0.80
2"	RTA15F1-2.0	2-15/32"	100'/200'	150	29	2"	1.05
3"	RTA15F1-3.0	3-1/2"	100'/200'	150	29	3"	1.64
4"	RTA15F1-4.0	4-9/16"	100'/200'	150	29	4"	2.58





# GAMMA™-TANK

Tank Truck Hose

The industry standard for tank truck, in-plant and oilfield loading operations requiring a strong yet flexible hose.



## TECHNICAL DATA

Tube	Black, Nitrile, 55% aromatics (ORS)
Cover	Black, Neoprene (smooth)
Reinforcement	High tensile tire cord plies; helix wire
Safety Factor	4:1
Temperature	-40°F to +180°F
Branding	TEXCEL® GAMMA™-TANK - TANK TRUCK HOSE 150 PSI W.P.



I.D.	#	O.D.	Std. Length	Working Pressure (psi)	Vacuum (in./HG)	Bend Radius	Lbs./Ft.
1-¼"	GTA15S1-125	1-43/64"	100'/200'	150	29	4"	0.70
1-½"	GTA15S1-1.5	1-59/64"	100'/200'	150	29	6"	0.84
2"	GTA15S1-2.0	2-29/64"	100'/200'	150	29	8"	1.10
2-½"	GTA15S1-2.5	2-61/64"	100'/200'	150	29	10"	1.48
3"	GTA15S1-3.0	3-½"	100'/200'	150	29	13"	1.79
4"	GTA15S1-4.0	4-9/16"	100'/200'	150	29	19"	2.64

# GAMMA™-FLEX TANK

Corrugated Tank Truck Hose

A world-class hose for tank truck, in-plant and oilfield loading operations requiring a strong yet flexible hose. Dramatic flexibility (one-to-one ratio, up to 4" inside diameter) for ease of handling.



## TECHNICAL DATA

Tube	Black, Nitrile, 55% aromatics (ORS)
Cover	Black, Neoprene (flex corrugated)
Reinforcement	High tensile tire cord plies; helix wire
Safety Factor	4:1
Temperature	-40°F to +180°F
Branding	TEXCEL® GAMMA™-FLEX TANK - FLEXIBLE TANK TRUCK HOSE 150 PSI W.P.
Features	Exceptional flexibility



I.D.	#	O.D.	Std. Length	Working Pressure (psi)	Vacuum (in./HG)	Bend Radius	Lbs./Ft.
1-½"	GTA15F1-1.5	1-63/64"	100'/200'	150	29	1.5"	0.77
2"	GTA15F1-2.0	2-15/32"	100'/200'	150	29	2"	1.02
2-½"	GTA15F1-2.5	3"	100'/200'	150	29	2.5"	1.31
3"	GTA15F1-3.0	3-½"	100'/200'	150	29	3"	1.60
4"	GTA15F1-4.0	4-9/16"	100'/200'	150	29	4"	2.55
5"	GTA15F1-5.0	5-46/64"	100'	150	29	6"	3.86
6"	GTA15F1-6.0	6-¾"	20'/100'	150	25	8"	4.17
8"	GTA15C1-8.0	8-13/16"	100'	150	25	10"	6.02





# GAMMA™-TANK 300

300psi Heavy-Duty Tank Truck Hose

Designed for offshore drilling and other demanding applications where a high working pressure is needed and longer lengths with fewer connections are desired.



## TECHNICAL DATA

Tube	Black, Nitrile, 55% aromatics (ORS)	
Cover	Black, Neoprene (smooth)	
Reinforcement	High tensile tire cord plies; helix wire	
Safety Factor	4:1	
Temperature	-40°F to +180°F	
Branding	TEXCEL® GAMMA™-TANK 300 - HEAVY-DUTY TANK TRUCK HOSE 300 PSI W.P.	

I.D.	#	O.D.	Std. Length	Working Pressure (psi)	Vacuum (in./HG)	Bend Radius	Lbs./Ft.
1-1/2"	GTA30S1-1.5	1-61/64"	100'/200'	300	29	5"	0.85
2"	GTA30S1-2.0	2-31/64"	100'/200'	300	29	7.5"	1.16
2-1/2"	GTA30S1-2.5	3"	100'/200'	300	29	12"	1.56
3"	GTA30S1-3.0	3-19/32"	100'/200'	300	29	16"	2.26
4"	GTA30S1-4.0	4-45/64"	100'/200'	300	29	20"	3.32

# GAMMA™-FLEX TANK 300

300psi Heavy-Duty Corrugated Tank Truck Hose

Designed for offshore drilling and other demanding applications where a high working pressure is needed and longer lengths with fewer connections are desired. Corrugated cover for greater flexibility.



## TECHNICAL DATA

Tube	Black, Nitrile, 55% aromatics (ORS)	
Cover	Black, Neoprene (corrugated)	
Reinforcement	High tensile tire cord plies; helix wire	
Safety Factor	4:1	
Temperature	-40°F to +180°F	
Branding	TEXCEL® GAMMA™-CORR TANK 300 - HEAVY DUTY CORRUGATED TANK TRUCK HOSE 300 PSI W.P.	
Features	Exceptional flexibility	

I.D.	#	O.D.	Std. Length	Working Pressure (psi)	Vacuum (in./HG)	Bend Radius	Lbs./Ft.
2"	GTA30C1-2.0	2-1/2"	100'/200'	300	29	4"	1.06
3"	GTA30C1-3.0	3-39/64"	100'/200'	300	29	7"	1.72
4"	GTA30C1-4.0	4-23/32"	100'/200'	300	29	10"	2.72
6"	GTA30C1-6.0	6-15/16"	100'	300	25	20"	5.41





# GAMMA™-FLEX TANK 500

500psi Heavy-Duty Corrugated Tank Truck Hose

Heavy-duty and high pressure tank truck hose for the most demanding applications.



## TECHNICAL DATA

Tube	Black, Nitrile, 55% aromatics (ORS)	
Cover	Black, Neoprene (corrugated)	
Reinforcement	High tensile tire cord plies; helix wire	
Safety Factor	4:1	
Temperature	-40°F to +180°F	
Branding	TEXCEL® GAMMA™-CORR TANK 500 - HEAVY DUTY TANK TRUCK HOSE 500 PSI W.P.	



I.D.	#	O.D.	Std. Length	Working Pressure (psi)	Vacuum (in./HG)	Bend Radius	Lbs./Ft.
2"	GTA50C1-2.0	2-25/32"	100'/200'	500	29	6"	1.73
3"	GTA50C1-3.0	3-59/64"	100'/200'	500	29	9"	2.77
4"	GTA50C1-4.0	5-1/32"	100'/200'	500	29	13"	4.36

# TEX-OSD 250

250psi Oil Suction & Discharge Hose

Smooth bore dock hose with high strength construction and 250psi working pressure for the longest possible service life under severe conditions. Meets U.S.C.G. certification requirements when assembled per USCG 33CFR 154.500 specifications.



## TECHNICAL DATA

Tube	Black, Nitrile, 55% aromatics (ORS)	
Cover	Black, Neoprene	
Reinforcement	High tensile tire cord plies; helix wire	
Safety Factor	4:1	
Temperature	-40°F to +190°F	
Branding	TEXCEL® TEX-OSD 250 - OIL SUCTION AND DISCHARGE HOSE 250 PSI W.P. MEETS USCG 33CFR 154.500	
Specifications	Meets U.S.C.G. requirements	



I.D.	#	O.D.	Std. Length	Working Pressure (psi)	Vacuum (in./HG)	Bend Radius	Lbs./Ft.
2"	OSD-2.0	2-15/16"	100'	250	29	8"	2.15
3"	OSD-3.0	4-1/4"	100'	250	29	11"	3.41
4"	OSD-4.0	5-5/16"	100'	250	29	15"	4.87
6"	OSD-6.0	7-3/8"	100'	250	29	25"	8.18
8"	OSD-8.0	9-3/4"	100'	250	29	31"	14.35
10"	OSD-10.0	12"	40'	250	29	36"	20.49
12"	OSD-12.0	14-1/8"	40'	250	29	40"	26.49





# TEX-OBL

Built-In Flanges Oil Suction & Discharge Assemblies

This smooth bore dock hose is manufactured with built-in carbon steel 150# ANSI flanges. Meets U.S.C.G. certification requirements per USCG 33CFR 154.500.



## TECHNICAL DATA

Tube	Black, Nitrile, 55% aromatics (ORS)
Cover	Black, Neoprene
Reinforcement	High tensile tire cord plies; helix wire
Safety Factor	4:1
Temperature	-40°F to +190°F
Ends	ANSI 150# carbon steel built-in fixed by floating flanges
Branding	TEXCEL® TEX-OSD 250 - OIL SUCTION AND DISCHARGE HOSE 250 PSI W.P. MEETS USCG 33CFR 154.500
Specifications	Meets U.S.C.G. requirements

ANSI Flanges	Assembly Dimensions	# Part Number	O.D.	Working Pressure (psi)	Vacuum (in./HG)	Bend Radius	Lbs./Assembly
Built-In Fixed x Floating Flanged Assemblies	4" x 10'	OBL-4-10-FL	5-5/16"	250	29	20"	119
	4" x 20'	OBL-4-20-FL	5-5/16"	250	29	20"	183
	6" x 10'	OBL-6-10-FL	7-3/8"	250	29	26"	204
	6" x 20'	OBL-6-20-FL	7-3/8"	250	29	26"	208
	6" x 25'	OBL-6-25-FL	7-3/8"	250	29	26"	360
	6" x 30'	OBL-6-30-FL	7-3/8"	250	29	26"	412
	6" x 40'	OBL-6-40-FL	7-3/8"	250	29	26"	516
	6" x 50'	OBL-6-50-FL	7-3/8"	250	29	26"	620
	8" x 10'	OBL-8-10-FL	9-3/4"	250	29	30"	327
	8" x 20'	OBL-8-20-FL	9-3/4"	250	29	30"	494
	8" x 25'	OBL-8-25-FL	9-3/4"	250	29	30"	577
	8" x 30'	OBL-8-30-FL	9-3/4"	250	29	30"	660
	8" x 50'	OBL-8-50-FL	9-3/4"	250	29	30"	993
	10" x 10'	OBL-10-10-FL	12"	250	29	60"	468
	10" x 20'	OBL-10-20-FL	12"	250	29	60"	698
	10" x 25'	OBL-10-25-FL	12"	250	29	60"	813
	12" x 10'	OBL-12-10-FL	14-1/8"	250	29	100"	617
	12" x 20'	OBL-12-20-FL	14-1/8"	250	29	100"	908
	12" x 25'	OBL-12-25-FL	14-1/8"	250	29	100"	1054
	*14" x 10'	OBL-14-10-FL	16-11/32"	250	29	175"	893
*14" x 20'	OBL-14-20-FL	16-11/32"	250	29	175"	1269	

\*Special order item only



texcelindustrial.com


800.231.7116



# SIGMA-DUTY MAX™

NBR Suction Hose


Duty Max is a heavy-duty, all-weather, suction hose for use in liquid manure handling, septic and wastewater handling, water suction, and general oilfield applications. Please note that service life may vary based on media being conveyed and operating conditions. The PVC helix makes for increased toughness over rough surfaces and around corners making it the perfect product for harsh conditions.

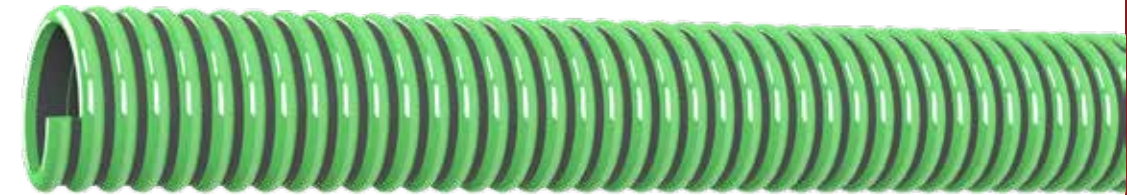

## TECHNICAL DATA

Construction	NBR/PVC tube with a PVC helix
Safety Factor	3:1
Temperature	-40°F to +140°F (-40°C to +60°C)
Features	Superior flexibility even at sub-zero temperatures Lightweight, with floating capabilities

I.D.	# Part Number	O.D.	Std. Length	Working Pressure (psi)	Vacuum (in./HG)	Bend Radius	Lbs./Ft.
1-1/2"	SP-DUTY-1.5-100	1.82"	100'	50	29.8	3.0"	0.44
2"	SP-DUTY-2.0-100	2.43"	100'	50	29.8	5.0"	0.74
3"	SP-DUTY-3.0-100	3.55"	100'	43	29.8	7.0"	1.21
4"	SP-DUTY-4.0-100	4.62"	100'	38	29.8	11.0"	1.95
6"	SP-DUTY-6.0-100	6.81"	100' / 20'	23	28.0	20.0"	3.23



texcelindustrial.com

800.231.7116








# SIGMA-TDG™

## Tank Drop Hose

High quality tank drop hose designed with specially compounded, non-permeable polyurethane, designed to be compatible with gasoline, diesel and most biofuels, such as ethanol (up to E98) and biodiesel (B100 meeting ASTM D-6751). Extremely flexible, even in sub-zero temperatures.



### TECHNICAL DATA

Construction	Clear, specially compounded polyurethane with a rigid PVC right-handed helix (green) with spiraled synthetic yarn	
Temperature	-40°F to +150°F (service temperature depends on actual application)	
Grounding	Embedded tin coated copper wire	
Branding	TEXCEL® SIGMA™-TDG - TANK DROP HOSE - <ID>-LOT	
Compared To	TDH Tigerdrop Clear	
Sleeves	SIGMA-TDG™-Sleeves (flexible PVC banding sleeves) or SIGMA-COIL™ (banding coils) are recommended to accurately follow assembly procedures	
Features	Compatible with ethanol up to E98 & biodiesel up to B100	

I.D.	Part Number	O.D.	Std. Length	Working Pressure (psi)	Vacuum (in./HG)	Bend Radius	Lbs./Ft.
3"	SPVC-TDG-3.0	3.63"	20'/60'/100'	65	29	6"	1.21
4"	SPVC-TDG-4.0	4.73"	20'/60'/100'	65	29	8"	1.72



texcelindustrial.com

800.231.7116

WARNING: Cancer and Reproductive Harm  
www.P65Warnings.ca.gov




# SIGMA-TDHD™

## Heavy-Duty Tank Drop Hose

High quality gasoline tank drop hose that is lightweight and flexible with a high abrasion resistant helix for easy drag and handling. Flexible, even in sub-zero temperatures. It's suitable for the transfer of gasoline, ethanol blends (up to E15) and other petroleum products with an aromatic content of 40% or less.



### TECHNICAL DATA

Construction	Black, specially compounded NBR/PVC (Up to 40% Aromatics) – static dissipating with a Rigid, orange, right-handed PVC helix with spiraled synthetic yarn	
Temperature	-40°F to +150°F (service temperature depends on actual application)	
Grounding	Embedded tin coated copper wire	
Branding	TEXCEL® SIGMA™-TDHD - HEAVY DUTY TANK DROP HOSE - <ID>-LOT	
Compared To	120LT	
Sleeves	SIGMA-TDHD™-Sleeves (flexible PVC banding sleeves) or SIGMA-COIL™ (banding coils) are recommended to accurately follow assembly procedures	
Features	Compatible with gasoline and ethanol blends up to E15	

I.D.	Part Number	O.D.	Std. Length	Working Pressure (psi)	Vacuum (in./HG)	Bend Radius	Lbs./Ft.
2"	SPVC-TDHD-2.0	2.63"	20'/60'/100'	65	29	5"	1.12
3"	SPVC-TDHD-3.0	3.81"	20'/60'/100'	65	29	6"	1.38
4"	SPVC-TDHD-4.0	4.72"	20'/60'/100'	65	29	8"	2.19

WARNING: Cancer and Reproductive Harm  
www.P65Warnings.ca.gov

texcelindustrial.com

800.231.7116






# SIGMA-TD 150™

## 150psi Heavy-Duty Tank Drop Hose

This lightweight drop hose is designed for higher working pressure applications where 150psi is desired. It's suitable for the transfer of gasoline, ethanol blends (up to E15), and other petroleum products with an aromatic content of 40% or less in both drop and pump off service applications. Its rugged and abrasion-resistant construction allows for a low coefficient of friction for ease and maneuverability.



### TECHNICAL DATA

Construction	Black, specially compounded NBR/PVC (up to 60% aromatics) – static-dissipating with a rigid PVC right-handed helix (red) and spiraled synthetic yarn	
Temperature	-40°F to +150°F (service temperature depends on actual application)	
Grounding	Embedded tin coated copper wire	
Branding	TEXCEL® SIGMA-TD150™ - HEAVY DUTY TANK DROP HOSE 150 PSI W.P. -<ID>-LOT	
Compared To	SP353	
Sleeves	SIGMA-TD150™ Sleeves (flexible PVC banding sleeves) or SIGMA-COIL™ (banding coils) are recommended to accurately follow assembly procedures	
Features	Designed for use at a higher 150psi working pressure	

### CAUTION

Hose fabrications should be performed only by experienced personnel. Static wire must be properly embedded, grounded and tested prior to use to assure grounding of hose and hose assembly.


# SIGMA-VRM™

## Medium-Duty Yellow Vapor Recovery Hose

High quality vapor recovery hose for medium-duty applications. Specially compounded, non-permeable polyurethane designed to be compatible with gasoline, diesel and most biofuels, such as ethanol (up to E98) and biodiesel vapors (B100 meeting ASTM D 6751). Extremely flexible, even in sub-zero temperatures.



### TECHNICAL DATA

Construction	Clear, specially compounded polyurethane with a yellow, rigid PVC, right-handed helix	
Temperature	-40°F to +150°F (service temperature depends on actual application)	
Grounding	Embedded tin coated copper wire	
Branding	TEXCEL® SIGMA-VRM™ - MEDIUM DUTY VAPOR RECOVERY HOSE -<ID>-LOT	
Compared To	Tigervapor/ST-120-VP	
Sleeves	SIGMA-VR™-Sleeves (flexible PVC banding sleeves) or SIGMA-COIL™ (banding coils) are recommended to accurately follow assembly procedures	

I.D.	Part Number	O.D.	Std. Length	Working Pressure (psi)	Vacuum (in./HG)	Bend Radius	Lbs./Ft.
2"	SPVC-TD150-2.0	2.73"	20'/60'/100'	150	29	6"	1.26
3"	SPVC-TD150-3.0	3.75"	20'/60'/100'	150	29	7"	1.55
4"	SPVC-TD150-4.0	4.88"	20'/60'/100'	150	29	9"	2.49

I.D.	Part Number	O.D.	Std. Length	Working Pressure (psi)	Vacuum (in./HG)	Bend Radius	Lbs./Ft.
2"	SPVC-VRM-2.0	3"	20'/60'/100'	17	29	3"	0.52
3"	SPVC-VRM-3.0	3-½"	20'/60'/100'	11	29	3.5"	0.77
4"	SPVC-VRM-4.0	4-½"	20'/60'/100'	9	29	4.5"	1.11





# SIGMA-VRH™

Heavy-Duty Red Vapor Recovery Hose

High quality vapor recovery hose for heavy-duty applications. Specially compounded, non-permeable polyurethane designed to be compatible with gasoline, diesel and most biofuels, such as ethanol (up to E98) and biodiesel vapors (B100 meeting ASTM D-6751). Extremely flexible, even in sub-zero temperatures.



## TECHNICAL DATA

Construction	Clear, specially compounded polyurethane with a bright red, rigid PVC, right-handed helix
Temperature	-40°F to +150°F (service temperature depends on actual application)
Grounding	Embedded tin coated copper wire
Branding	TEXCEL® SIGMA™-VRH - HEAVY DUTY VAPOR RECOVERY HOSE -<ID>-LOT
Compared To	Tigervapor HD
Sleeves	SIGMA-VR™-Sleeves (flexible PVC banding sleeves) or SIGMA-Coil™ (banding coils) are recommended to accurately follow assembly procedures



I.D.	Part Number	O.D.	Std. Length	Working Pressure (psi)	Vacuum (in./HG)	Bend Radius	Lbs./Ft.
3"	SPVC-VRH-3.0	3-37/64"	20'/60'/100'	13	29	4.5"	0.96
4"	SPVC-VRH-4.0	4-38/64"	20'/60'/100'	11	29	5.5"	1.28

# SIGMA-BANDING SLEEVES™

Plastic banding sleeves for use with SIGMA™ SERIES Tank Drop hose products. The suggested usage is in 12" sections per hose end to prevent band clamps from slipping, cutting into the exterior helix and improves fitting retention.

## TECHNICAL DATA

Material	Non-food grade, flexible PVC
Temperature	-40°F to +150°F (service temperature depends on actual application)
Features	Designed for right-handed spiral hose

## GREEN BANDING SLEEVE FOR: SIGMA-TDG

I.D.	Part Number	Std. Length	Lbs./Ft.
3"	3.0-SLEEVE-TDG	3'	3.20
4"	4.0-SLEEVE-TDG	3'	3.75



## ORANGE BANDING SLEEVE FOR: SIGMA-TDHD

I.D.	Part Number	Std. Length	Lbs./Ft.
2"	2.0-SLEEVE-TDHD	3'	1.10
3"	3.0-SLEEVE-TDHD	3'	3.20
4"	4.0-SLEEVE-TDHD	3'	3.75



## RED BANDING SLEEVE FOR: SIGMA-TD 150

I.D.	Part Number	Std. Length	Lbs./Ft.
2"	2.0-SLEEVE-TD150	3'	1.10
3"	3.0-SLEEVE-TD150	3'	3.20
4"	4.0-SLEEVE-TD150	3'	3.75



## YELLOW BANDING SLEEVE FOR: SIGMA-VRM AND VRH

I.D.	Part Number	Std. Length	Lbs./Ft.
2"	2.0-SLEEVE-VAPOR	3'	1.10
3"	3.0-SLEEVE-VAPOR	3'	3.20
4"	4.0-SLEEVE-VAPOR	3'	3.75





# SIGMA-DUTY MAX™

NBR Suction Hose

Duty Max is a heavy-duty, all-weather, suction hose for use in liquid manure handling, septic and wastewater handling, water suction, and general oilfield applications. Please note that service life may vary based on media being conveyed and operating conditions. The PVC helix makes for increased toughness over rough surfaces and around corners making it the perfect product for harsh conditions.



## TECHNICAL DATA

Construction	NBR/PVC tube with a PVC helix
Safety Factor	3:1
Temperature	-40°F to +140°F (-40°C to +60°C)
Features	Superior flexibility even at sub-zero temperatures Lightweight, with floating capabilities

I.D.	# Part Number	O.D.	Std. Length	Working Pressure (psi)	Vacuum (in./HG)	Bend Radius	Lbs./Ft.
1-1/2"	SP-DUTY-1.5-100	1.82"	100'	50	29.8	3.0"	0.44
2"	SP-DUTY-2.0-100	2.43"	100'	50	29.8	5.0"	0.74
3"	SP-DUTY-3.0-100	3.55"	100'	43	29.8	7.0"	1.21
4"	SP-DUTY-4.0-100	4.62"	100'	38	29.8	11.0"	1.95
6"	SP-DUTY-6.0-100	6.81"	100' / 20'	23	28.0	20.0"	3.23

# SIGMA-HD GREEN PVC™

Heavy-Duty Green PVC Water Suction Hose

Premium, heavy-duty yet economical construction for great durability. Smooth bore allows full production flow.



## TECHNICAL DATA

Construction	Olive green PVC with a green, tough vinyl helix
Safety Factor	3:1
Temperature	-4°F to +150°F
Compared To	110GR/Series J
Branding	TEXCEL® SIGMA-HD GREEN PVC™ - HEAVY DUTY WATER SUCTION HOSE -<ID>-LOT
Safety Note	Service temperature depends on actual application

I.D.	# Part Number	O.D.	Std. Length	Working Pressure (psi)	Vacuum (in./HG)	Bend Radius	Lbs./Ft.
1-1/2"	SPVC-GR-1.5	1.77"	100'	85	29	4"	0.39
2"	SPVC-GR-2.0	2.24"	100'	70	29	5"	0.57
2-1/2"	SPVC-GR-2.5	2.80"	100'	70	29	6.5"	0.74
3"	SPVC-GR-3.0	3.27"	100'	65	29	8.5"	0.94
*4"	SPVC-GR-4.0	4.67"	100'	65	29	12"	1.48
*5"	SPVC-GR-5.0	5.51"	100'	50	29	14"	2.15
*6"	SPVC-GR-6.0	6.93"	20'/100'	50	29	15"	2.89
*8"	SPVC-GR-8.0	8.66"	20'	45	29	20"	4.37
*10"	POLY-G-10.0	11.34"	20'/25'	30	29	35"	7.45
*12"	POLY-G-12.0	13.39"	20'/25'	30	29	40"	8.87

\*Cover is slightly corrugated





# SIGMA-HD CLEAR PVC™

Heavy-Duty Clear PVC Water Suction Hose

Premium, heavy-duty yet economical construction for great durability. Clear PVC allows visual confirmation of product flow.



## TECHNICAL DATA

Construction	Clear PVC (smooth bore) with a white, tough vinyl helix
Safety Factor	3:1
Temperature	-4°F to +150°F
Branding	TEXCEL® SIGMA-HD CLEAR PVC™ - HEAVY DUTY WATER SUCTION HOSE -<ID>-LOT
Compared To	110CL/Series H
Safety Note	Service temperature depends on actual application

I.D.	Part Number	O.D.	Std. Length	Working Pressure (psi)	Vacuum (in./HG)	Bend Radius	Lbs./Ft.
¾"	SPVC-CL-.75	0.95"	100'	100	29	2"	0.20
1"	SPVC-CL-1.0	1.26"	100'	100	29	2.5"	0.27
1-½"	SPVC-CL-1.5	1.82"	100'	85	29	4"	0.39
2"	SPVC-CL-2.0	2.39"	100'	70	29	5"	0.57
2-½"	SPVC-CL-2.5	2.93"	100'	70	29	6.5"	0.74
3"	SPVC-CL-3.0	3.43"	100'	65	29	8.5"	0.94
*4"	SPVC-CL-4.0	4.53"	100'	65	29	12"	1.48
*5"	SPVC-CL-5.0	5.55"	100'	50	29	14"	2.15
*6"	SPVC-CL-6.0	6.67"	20'/100'	50	29	15"	2.89
*8"	SPVC-CL-8.0	8.83"	20'	45	29	20"	4.37

\*Cover is slightly corrugated



texcelindustrial.com

800.231.7116



# SIGMA-PB DISCHARGE™

Blue PVC Lay-Flat Discharge Hose

Premium-quality, lightweight, lay-flat PVC hose that is economical and easy to handle. Excellent for pump discharge applications.



## TECHNICAL DATA

Construction	Blue, homogeneous virgin PVC with high tensile polyester yarn
Safety Factor	3:1
Temperature	-10°F to +120°F
Branding	TEXCEL® SIGMA-PB DISCHARGE™ - WATER DISCHARGE HOSE -<ID>-LOT
Safety Note	Service temperature depends on actual application

I.D.	Part Number	Std. Length	Working Pressure (psi)	Lbs./Ft.
1"	SPVC-PB-1.0-300	300'	90	0.10
1-¼"	SPVC-PB-1.25-300	300'	85	0.12
1-½"	SPVC-PB-1.5-300	300'	70	0.14
2"	SPVC-PB-2.0-300	300'	65	0.18
2-½"	SPVC-PB-2.5-300	300'	60	0.26
3"	SPVC-PB-3.0-300	300'	55	0.31
4"	SPVC-PB-4.0-300	300'	55	0.36
5"	SPVC-PB-5.0-300	300'	45	0.64
6"	SPVC-PB-6.0-300	300'	45	0.73
8"	SPVC-PB-8.0-300	300'	45	1.21
10"	SPVC-PB-10.0-100	100'	35	1.81
12"	SPVC-PB-12.0-100	100'	30	1.95



texcelindustrial.com

800.231.7116





# SIGMA-RH DISCHARGE™

Heavy-Duty Red PVC Lay-Flat Discharge Hose

A heavy-duty PVC lay-flat hose designed for higher pressure applications. The exclusive "through the weave" process ensures the highest quality and durability. An ideal hose for pump discharge, tank cleaning, dewatering, irrigation and wash down applications.



## TECHNICAL DATA

Tube and Cover	Red, homogeneous virgin PVC
Reinforcement	High tensile polyester yarn
Safety Factor	3:1
Temperature	-10°F to +120°F
Branding	TEXCEL® SIGMA-RH DISCHARGE™ - HEAVY DUTY WATER DISCHARGE HOSE -<ID>-LOT
Safety Note	Service temperature depends on actual application

I.D.	Part Number	Std. Length	Working Pressure (psi)	Lbs./Ft.
1-1/2"	SPVC-RH-1.5-300	300'	150	0.20
2"	SPVC-RH-2.0-300	300'	150	0.28
3"	SPVC-RH-3.0-300	300'	150	0.57
4"	SPVC-RH-4.0-300	300'	130	0.67
6"	SPVC-RH-6.0-300	300'	120	1.34
8"	SPVC-RH-8.0-300	300'	90	1.88



# TEX-MILL

Mill Discharge Hose (Single Jacket)

Lightweight general purpose hose designed for open-ended discharge applications. 300psi acceptance test/150psi working pressure.



## TECHNICAL DATA

Tube	Synthetic rubber EPDM
Reinforcement	White, 100% polyester jacket
Temperature	-58°F to +176°F
Branding	TEXCEL® TEX-MILL - DISCHARGE HOSE -<ID>- 150 PSI SERVICE PRESSURE I
Packaging	Boxed
Safety Note	Not recommended for use as a fire hose

I.D.	Part Number	Bowl Size	Working Pressure (psi)	Std. Length	Lbs./Ft.
1-1/2"	MILL-1.5	1-3/4"	150	100'	0.20
2"	MILL-2.0	2-3/16"	150	100'	0.27
2-1/2"	MILL-2.5	2-13/16"	150	100'	0.38
3"	MILL-3.0	Use Camlocks	150	50'	0.46
4"	MILL-4.0	Use Camlocks	150	50'	0.65



# SIGMA-PVC AQUA™

PVC Water Suction Hose

Heavy-duty suction and discharge hose for use in a variety of industries, such as rental pumping equipment and applications where the hose needs to slide easily, or visual confirmation of material flow is necessary.



## TECHNICAL DATA

Construction	Clear, flexible PVC with synthetic yarn and an orange, rigid PVC, right-handed helix	
Safety Factor	3:1	
Temperature	-4°F to +150°F	
Branding	TEXCEL® SIGMA-PVC AQUA™ - WATER SUCTION HOSE - <ID> - XXXPSI WP-LOT	
Compared To	SR/WST	
Safety Note	Service temperature depends on actual application	

I.D.	#	O.D.	Std. Length	Working Pressure (psi)	Vacuum (in./HG)	Bend Radius	Lbs./Ft.
1-1/2"	SPVC-AQUA-1.5	2.03"	100'	100	28	3"	0.47
2"	SPVC-AQUA-2.0	2.62"	100'	100	28	4"	0.71
3"	SPVC-AQUA-3.0	3.71"	100'	100	28	6"	1.14
4"	SPVC-AQUA-4.0	4.80"	100'	75	28	7"	1.75
5"	SPVC-AQUA-5.0	6.05"	100'	70	28	9"	3.00
6"	SPVC-AQUA-6.0	7.17"	20'/60'/100'	70	28	10"	3.90
8"	SPVC-AQUA-8.0	9.33"	15'/20'/25'/50'	70	28	16"	5.56
10"	SPVC-AQUA-10.0	10.86"	20'/25'	40	28	25"	8.68
12"	SPVC-AQUA-12.0	13.8"	20'	28	25	45"	10.30

# SIGMA-CLAMP™

Double Bolt Spiral Clamp

Double bolt spiral clamps are recommended for use with Texcel's SIGMA-Series PVC hoses with convoluted cover.



	Hose Diameter	Part Number	Lbs./Each
Right Hand	1-1/2"	1.5-SP-CLAMP	0.29
	2"	2.0-SP-CLAMP	0.34
	2-1/2"	2.5-SP-CLAMP	0.63
	3"	3.0-SP-CLAMP	0.72
	4"	4.0-SP-CLAMP	1.21
	5"	5.0-SP-CLAMP	1.41
	6"	6.0-SP-CLAMP	2.29
Left Hand	8"	8.0-SP-CLAMP	2.97
	1-1/2"	1.5-SP-CLAMP-LH	0.29
	2"	2.0-SP-CLAMP-LH	0.34
	3"	3.0-SP-CLAMP-LH	0.72
	4"	4.0-SP-CLAMP-LH	1.21
	5"	5.0-SP-CLAMP-LH	1.41
	6"	6.0-SP-CLAMP-LH	2.29
8"	8.0-SP-CLAMP-LH	2.97	





# TEX-AQUA HD

Heavy-Duty Water Suction & Discharge Hose

Constructed with the highest quality compounds to provide maximum flexibility, long life and lighter weight for easy handling.



## TECHNICAL DATA

Tube	Black, SBR/EPDM blend
Cover	Black, SBR/EPDM blend
Reinforcement	High tensile tire cord plies; helix wire
Safety Factor	3:1
Temperature	-40°F to +180°F
Ends	Soft cuffs available on 6" and 8" sizes only
Branding	TEXCEL® TEX-AQUA HD - HEAVY DUTY WATER SUCTION & DISCHARGE HOSE XXX PSI W.P.
Note	6" and 8" available in a smooth or corrugated cover For extra flexibility use 5"-12" corrugated



## SMOOTH COVER

I.D.	# Part Number	O.D.	Std. Length	Working Pressure (psi)	Vacuum (in./HG)	Bend Radius	Lbs./Ft.
1"	AQUA-HD-1.0	1-19/64"	100'	150	29	4"	0.50
1-1/4"	AQUA-HD-1.25	1-5/8"	100'	150	29	5"	0.62
1-1/2"	AQUA-HD-1.5	1-7/8"	100'	150	29	7"	0.85
2"	AQUA-HD-2.0	2-7/16"	100'/200'	150	29	10"	1.06
2-1/2"	AQUA-HD-2.5	2-7/8"	100'	150	29	11"	1.31
3"	AQUA-HD-3.0	3-29/64"	100'/200'	150	29	12"	1.73
4"	AQUA-HD-4.0	4-1/2"	100'/200'	150	29	14"	2.55
6"	AQUA-HD-S-6.0	6-5/8"	20'/100'	150	25	19"	5.90
8"	AQUA-HD-S-8.0	8-5/8"	20'/100'	150	25	20"	7.90

## CORRUGATED COVER

I.D.	# Part Number	O.D.	Std. Length	Working Pressure (psi)	Vacuum (in./HG)	Bend Radius	Lbs./Ft.
5"	AQUA-HD-5.0	5-41/64"	100'	150	25	14"	4.50
6"	AQUA-HD-6.0	6-11/16"	20'/100'	150	25	15"	5.50
8"	AQUA-HD-8.0	8-3/4"	20'/100'	150	25	16"	7.50
10"	AQUA-HD-10.0	10-3/4"	20'/25'	50	20	18"	10.00
12"	AQUA-HD-12.0	12-7/8"	20'/25'	50	20	20"	12.00

# TEX-FLO 2MD

Medium-Duty 2-Ply Water Discharge Hose

Soft-wall design gives similar performance to a lay-flat hose, but with increased abrasion resistance and tensile strength.



## TECHNICAL DATA

Tube	Black, SBR/EPDM blend
Cover	Black, SBR/EPDM blend
Reinforcement	High tensile tire cord plies
Safety Factor	3:1
Temperature	-40°F to +180°F
Branding	TEXCEL® TEX-FLO 2MD - WATER DISCHARGE HOSE 2PLY XXX PSI WP



I.D.	# Part Number	O.D.	Std. Length	Fabric Plies	Working Pressure (psi)	Lbs./Ft.
1-1/2"	FLO-2MD-1.5	1-52/64"	100'	2	150	0.41
2"	FLO-2MD-2.0	2-20/64"	100'	2	150	0.52
2-1/2"	FLO-2MD-2.5	2-52/64"	100'	2	150	0.65
3"	FLO-2MD-3.0	3-20/64"	100'	2	150	0.77
4"	FLO-2MD-4.0	4-20/64"	100'	2	150	1.06
6"	FLO-2MD-6.0	6-22/64"	100'	2	100	1.88
8"	FLO-2MD-8.0	8-23/64"	100'	2	100	2.61
10"	FLO-2MD-10.0	10-27/64"	100'	2	80	3.47







# TEX-FLO 4HD

## Heavy-Duty 4-Ply Water Discharge Hose








Soft-wall design gives similar performance to a lay-flat hose, but with increased abrasion resistance and tensile strength. FLO-HD is made of a premium-quality SBR/EPDM blend for maximum weather resistance and life in abusive service.



### TECHNICAL DATA

Tube	Black, SBR/EPDM blend
Cover	Black, SBR/EPDM blend
Reinforcement	High tensile tire cord plies
Safety Factor	3:1
Temperature	-40°F to +180°F
Branding	TEXCEL® TEX-FLO 4HD - HEAVY DUTY WATER DISCHARGE HOSE 4PLY XXXPSI WP




 I.D.	 Part Number	 O.D.	 Std. Length	 Fabric Plies	 Working Pressure (psi)	 Lbs./Ft.
1-1/2"	FLO-4HD-1.5	1-58/64"	100'	4	250	0.56
2"	FLO-4HD-2.0	2-26/64"	100'	4	250	0.73
2-1/2"	FLO-4HD-2.5	2-58/64"	100'	4	250	0.88
3"	FLO-4HD-3.0	3-26/64"	100'	4	250	1.04
4"	FLO-4HD-4.0	4-27/64"	100'	4	200	1.41
4-1/2"	FLO-4HD-4.5	4-59/64"	100'	4	200	1.58
5"	FLO-4HD-5.0	5-28/64"	100'	4	200	1.89
6"	FLO-4HD-6.0	6-29/64"	100'	4	200	2.48
8"	FLO-4HD-8.0	8-30/64"	100'	4	200	3.39
10"	FLO-4HD-10.0	10-34/64"	100'	4	150	4.44
12"	FLO-4HD-12.0	12-34/64"	50'	4	150	5.30

# GAMMA™-FLEX XLPE

Cross-Linked Polyethylene Chemical Hose


Designed to handle a wide range of chemicals, solvents and corrosive liquids in both pressure and suction service.



## TECHNICAL DATA

Tube	Clear, cross-linked polyethylene	
Cover	Green, EPDM (flex corrugated)	
Reinforcement	High tensile tire cord plies; helix wire	
Safety Factor	4:1	
Temperature	-40°F to +212°F	
Branding	TEXCEL® GAMMA™-FLEX XLPE - CHEMICAL SUCTION AND DISCHARGE HOSE 200 PSI W.P. XLPE TUBE	
Safety Note	Temperature rating depends on specific chemical conveyed and concentration	
Features	Exceptional flexibility	

I.D.	Part Number	O.D.	Std. Length	Working Pressure (psi)	Vacuum (in./HG)	Bend Radius	Lbs./Ft.
1"	GXL20F1-1.0	1-15/32"	100'/200'	200	29	2.5"	0.56
1-1/2"	GXL20F1-1.5	1-31/32"	100'/200'	200	29	3"	0.80
2"	GXL20F1-2.0	2-1/2"	100'/200'	200	29	4"	1.15
2-1/2"	GXL20F1-2.5	3"	100'/200'	200	29	5"	1.41
3"	GXL20F1-3.0	3-35/64"	100'/200'	200	29	6"	1.89
4"	GXL20F1-4.0	4-39/64"	100'/200'	200	29	8"	2.69



# WORKING PRESSURE RECOMMENDATIONS

Working pressures are in accordance with ARPM design safety factors at ambient temperatures (approximately 70°F). Texcel cautions against using a hose outside the stated temperature limits. Even within these limits, coupling type and hose size can negatively impact performance at higher temperatures. For optimum performance and safety, we recommend reducing the maximum working pressure as indicated below:

**80° to 150°F** – Reduce working pressure by 15%

**150° to 225°F** – Reduce working pressure by 30%

**Over 225°F** – Reduce working pressure by 50%

## CAUTION

Consult the Chemical Resistance Chart and the Safety Warning for each application. It is advisable to test the tube material under actual service conditions prior to initial use.



# GAMMA™-FLEX UHMW

Ultra-High Molecular Weight Polyethylene Chemical Hose

A more flexible chemical hose designed to handle 98% of all chemicals, solvents and corrosive liquids in both pressure and suction service.



## TECHNICAL DATA

Tube	Clear, ultra-high molecular weight polyethylene
Cover	Blue or green*, EPDM (flex corrugated)
Reinforcement	High tensile tire cord plies; helix wire
Safety Factor	4:1
Temperature	-40°F to +250°F (intermittent)
Branding	TEXCEL® GAMMA™-FLEX UHMW - CHEMICAL SUCTION AND DISCHARGE HOSE 200 PSI W.P. UHMW TUBE
Safety Note	Temperature rating depends on specific chemical conveyed and concentration
Features	Exceptional flexibility



\*The material code defaults to a Blue cover. To order Green cover insert the letter G before hyphen in part number.

\*\*Only Available in Blue.

I.D.	Part Number	O.D.	Std. Length	Working Pressure (psi)	Vacuum (in./HG)	Bend Radius	Lbs./Ft.
1"	GUH20C1-1.0	1-7/16"	100'/200'	200	29	2.5"	0.57
1-1/4"***	GUH20C1-1.25	1-45/64"	100'/200'	200	29	2.75"	0.62
1-1/2"	GUH20C1-1.5	1-61/64"	100'/200'	200	29	3"	0.81
2"	GUH20C1-2.0	2-31/64"	100'/200'	200	29	4"	1.11
2-1/2"	GUH20C1-2.5	2-63/64"	100'/200'	200	29	5"	1.40
3"	GUH20C1-3.0	3-35/64"	100'/200'	200	29	6"	1.77
4"	GUH20C1-4.0	4-9/16"	100'/200'	200	29	8"	2.83
6"	GUH20C1-6.0	6-53/64"	20'/25'/100'	200	29	20"	5.50



# TEX-PUSH-ON 300

300psi Push-On Hose

Low pressure braided hose for quick and easy insertion of push-on fittings with no special crimping tools required. It's internal polyester reinforcement design allows for excellent coupling retention.



## TECHNICAL DATA

Tube	Black, NBR (ARPM Class A)
Cover	Black, NBR/PVC (ARPM Class A)
Reinforcement	Black, reinforced braided polyester cords
Safety Factor	4:1
Temperature	-40°F to +212°F (-40°C to +100°C)
Branding	TEXCEL® TEX-PUSH-ON <ID>

Dash	I.D.		#	Part Number	O.D.		Working Pressure		Burst Pressure		Weight	
	Inch	Dn			Inch	mm	psi	bar	psi	bar	lbs/ft	Kg/mt
4	1/4	6		PUSH-4-250	1/2	13	300	21	1200	83	0.10	0.15
6	3/8	10		PUSH-6-250	33/60	17	300	21	1200	83	0.14	0.20
8	1/2	12		PUSH-8-250	81/100	21	300	21	1200	83	0.19	0.28
10	5/8	16		PUSH-10-250	47/60	24	300	21	1200	83	0.22	0.33
12	3/4	19		PUSH-12-250	1-9/100	28	300	21	1200	83	0.28	0.43

# TEX-MP

Multi-Purpose Air Hose

Excellent quality multi-purpose hose for applications calling for oil resistance and higher working pressures. Tube handles oil-laden air, lubricating oils and mild alkalis or caustic solutions.



## TECHNICAL DATA

Tube	Black, NBR (ARPM Class B)
Cover	Red, NBR/PVC (ARPM Class C)
Reinforcement	Braided polyester cords
Safety Factor	3:1
Temperature	-20°F to +180°F
Branding	TEXCEL® TEX-MP - MULTI-PURPOSE AIR HOSE -<ID>- XXX PSI WP-LOT

I.D.	Package Type	#	Part Number	O.D.	Std. Length	Working Pressure (psi)	Lbs./Ft.
1/4"	Reel		MP-4-R300-600R	9/16"	600'	300	0.13
3/8"	Reel		MP-6-R300-600R	23/32"	600'	300	0.22
1/2"	Reel		MP-8-R300-600R	7/8"	600'	300	0.31
3/4"	Reel		MP-12-R300-600R	1-7/32"	600'	300	0.48
1"	Reel		MP-16-R300-400R	1-7/16"	400'	300	0.66
1-1/4"	Reel		MP-20-R300-300R	1-3/4"	300'	300	0.69
1-1/2"	Reel		MP-24-R300-250R	2"	250'	300	0.80
2"	Reel		MP-32-R250-200R	2-19/32"	200'	250	1.54



On 1/2" – 1" sizes that cannot be made to 600', but are ordered at 600', we will produce 2 – 300' lengths. 1-1/4" X 300' Reels will be made using 2- 150' lengths. 1-1/2" x 250' Reels will be made using a 100' length + a 150' length. There will be no more than 3 pieces per reel and there will never be a piece that is shorter than 50'

**Maximum Length Per Size**  
 1/4" – 3/8" = 600'  
 1/2" – 1" = 500'  
 1-1/4" – 2" = 200'



# TEX-GS

## General Service Air & Water Hose

A tough, heavy-duty, abrasion and ozone-resistant general service hose. Designed for the transfer of air, mild chemicals and water across multiple applications. The ability to order this product in continuous lengths provides efficiently in inventory controls as well as ease of handling at job sites.



### TECHNICAL DATA

Tube	Black, EPDM
Cover	Red or Black*, SBR/EPDM
Reinforcement	One or two braided polyester cords
Safety Factor	3:1
Temperature	-20°F to +180°F
Branding	TEXCEL® TEX-GS - GENERAL SERVICE AIR AND WATER -<ID>-XXXPSI WP-LOT (white letters)
Packaging	Coils are continuous lengths

\*The material code defaults to a red cover. To order the black cover replace the last R with the letter B.

On 1/2" – 1" sizes that cannot be made to 600', but are ordered at 600', we will produce 2 – 300' lengths. 1-1/4" X 300' Reels will be made using 2- 150' lengths. 1-1/2" x 250' Reels will be made using a 100' length + a 150' length. There will be no more than 3 pieces per reel and there will never be a piece that is shorter than 50'

I.D.	Package Type	#	Part Number	O.D.	Std. Length	Working Pressure (psi)	Lbs./Ft.
1/4"	Reel	GS-4-R250-600R		33/64"	600'	250	0.12
	Coil	GS-4-C250-200R		33/64"	200'	250	0.12
5/16"	Reel	GS-5-R250-600R		19/32"	600'	250	0.15
	Coil	GS-5-C250-200R		19/32"	200'	250	0.15
3/8"	Reel	GS-6-R250-600R		43/64"	600'	250	0.19
	Coil	GS-6-C250-200R		43/64"	200'	250	0.19
1/2"	Reel	GS-8-R250-600R		53/64"	600'	250	0.26
	Coil	GS-8-C250-200R		53/64"	200'	250	0.26
5/8"	Reel	GS-10-R250-600R		63/64"	600'	250	0.33
	Coil	GS-10-C250-200R		63/64"	200'	250	0.33
3/4"	Reel	GS-12-R250-600R		1-9/64"	600'	250	0.45
	Coil	GS-12-C250-50R		1-9/64"	50'	250	0.45
1"	Coil	GS-12-C250-200R		1-9/64"	200'	250	0.45
	Reel	GS-16-R250-400R		1-27/64"	400'	250	0.60
1-1/4"	Coil	GS-16-C250-50R		1-27/64"	50'	250	0.60
	Reel	GS-20-R250-300R		1-47/64"	300'	250	0.86
1-1/2"	Reel	GS-24-R250-250R		2-8/64"	250'	250	1.37
2"	Reel	GS-32-R250-200R		2-38/64"	200'	250	1.61

# TEX-CONTRACTORS

## Banded Contractor's Assembly

A tough, heavy-duty, abrasion and ozone-resistant general service hose coupled with plated, universal fittings secured with two galvanized steel Band-It® bands on each end.




### TECHNICAL DATA

Tube	Black, EPDM
Cover	Red, SBR/EPDM
Reinforcement	Braided polyester cords
Safety Factor	3:1
Temperature	-20°F to +180°F
Branding	TEXCEL® TEX-GS - GENERAL SERVICE AIR AND WATER -<ID>-XXXPSI WP-LOT
Couplings	Plated universal couplings with two galvanized steel Band-It® bands on each end
Packaging	Shrink-wrapped coils

Contractor's Air Assembly	I.D.	Number of Bands	#	Part Number	O.D.	Std. Length	Working Pressure (psi)	Lbs./Assembly
50' Air Hose with	3/4"	2	CON-12-250-50R2		1-3/16"	50'	250	22
Crow's Feet	1"	2	CON-16-250-50R2		1-3/8"	50'	250	30





# TEX-CRIMP CONTRACTORS

## Crimped Contractor's Assembly


A tough, heavy-duty, abrasion and ozone-resistant general service hose. Couplings are secured with a crimp ferrule.



### TECHNICAL DATA

Tube	Black, EPDM
Cover	Red, SBR/EPDM
Reinforcement	Braided polyester cords
Safety Factor	3:1
Temperature	-20°F to +180°F
Branding	TEXCEL® TEX-GS - GENERAL SERVICE AIR AND WATER -<ID>-XXXPSI WP-LOT
Couplings	Plated universal coupling with crimped ferrules
Packaging	Shrink-wrapped coils

Contractor's Air Assembly	I.D.	Part Number	O.D.	Std. Length	Working Pressure (psi)	Lbs./Assembly
50' Air Hose with Crow's Feet	¾"	CON-12-250-50RC	1-¾"	50'	250	22
	1"	CON-16-250-50RC	1-¾"	50'	250	30



# TEX-MASTER

## Heavy-Duty Textile Reinforced Air Hose

Heavy-duty, multi-purpose, textile reinforced hose for service where a tough and rugged hose is required.



### TECHNICAL DATA

Tube	Black, Nitrile blend
Cover	Yellow, EPDM/SBR blend
Reinforcement	High tensile tire cord plies
Safety Factor	4:1
Temperature	-40°F to +220°F
Branding	TEXCEL® TEX-MASTER - HIGH TENSILE AIR HOSE 300 PSI W.P.




I.D.	Part Number	O.D.	Std. Length	Working Pressure (psi)	Lbs./Ft.
2"	MASTER-2.0	2-19/32"	100'	300	1.10
2-½"	MASTER-2.5	3-3/16"	100'	300	1.37
3"	MASTER-3.0	3-45/64"	100'	300	2.05
4"	MASTER-4.0	4-23/32"	100'	300	3.23



# TEX-KING



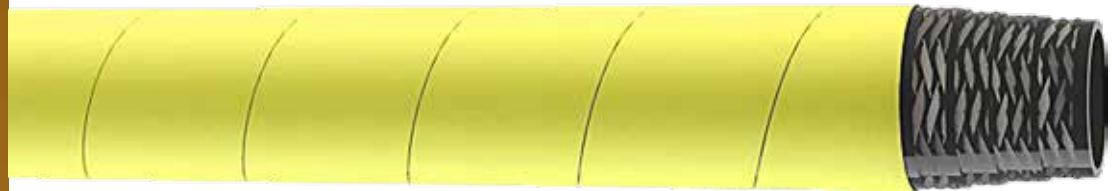


## Wire Air Hose

The ideal "bull hose" for heavy construction, mining and road-building service. Braided steel wire construction.



### TECHNICAL DATA

Tube	Black, Nitrile/SBR blend	
Cover	Bright yellow, SBR blend (Pinpricked)	
Reinforcement	Steel braided wire plies	
Safety Factor	4:1	
Temperature	-22°F to +185°F, intermittent at 250°F	
Branding	TEXCEL® TEX-KING - STEEL WIRE AIR HOSE - <ID>- XXXPSI MAX WP(embossed)	

 I.D.	 Part Number	 O.D.	 Std. Length	 Working Pressure (psi)	 Lbs./Ft.
1/2"	KING-.50	57/64"	100'	1000	0.31
3/4"	KING-.75	1-9/64"	100'	1000	0.44
1"	KING-1.0	1-27/64"	100'	800	0.61
1-1/2"	KING-1.5	1-31/32"	100'	800	1.07
2"	KING-2.0	2-33/64"	100'	600	1.44
2-1/2"	KING-2.5	3-5/64"	100'	600	1.41
3"	KING-3.0	3-5/8"	100'	500	2.19
4"	KING-4.0	4-51/64"	100'	500	4.55



# Hose System Pressure Derating Multipliers For Elevated Temperatures (°F)

---

Hose Type	Steam, Hot Tar, Asphalt	PVC	All Other
70°	1.00	1.00	1.00
90°	0.95	0.82	0.91
150°	0.81	0.32	0.64
200°	0.68	N/R	0.42
250°	0.56	N/R	0.20
300°	0.44	N/R	N/R
350°	0.32	N/R	N/R
400°	0.20	N/R	N/R
450°	0.08	N/R	N/R
500°	N/R	N/R	N/R





# SIGMA-POLY-U™

Lightweight Polyurethane Hose

Extremely flexible hose, ideal for leaf collection, lawn cleaning and concrete surface preparation equipment. The smooth bore polyurethane tube allows for high abrasion resistance and unrestricted air flow.



## TECHNICAL DATA

Construction	Clear, polyurethane (ester-based) with exposed orange, rigid PVC, right-handed helix
Safety Factor	3:1
Temperature	-4°F to +150°F
Branding	TEXCEL® SIGMA-POLY U™ -LIGHTWEIGHT POLYURETHANE HOSE -<ID>-LOT
Compared To	Urevac-1/150 UDH
Safety Note	Service temperature depends on actual application

I.D.	#	O.D.	Std. Length	Working Pressure (psi)	Vacuum (in./HG)	Bend Radius	Lbs./Ft.
1-½"	SPVC-PU-1.5	1.91"	50'	20	22	1"	0.23
2"	SPVC-PU-2.0	2.46"	50'	15	21	1.5"	0.32
2-½"	SPVC-PU-2.5	3.01"	50'	9	19	1.5"	0.34
3"	SPVC-PU-3.0	3.60"	50'	8	19	2.5"	0.48
4"	SPVC-PU-4.0	4.72"	50'	7	13	3"	0.70
5"	SPVC-PU-5.0	5.94"	50'	6	10	4"	0.89
6"	SPVC-PU-6.0	7.17"	50'	5	7	5"	1.15
8"	SPVC-PU-8.0	9.33"	50'	3	5	7"	1.65



texcelindustrial.com

800.231.7116



# SIGMA-FD™

FDA PVC Food Grade Suction Hose

Heavy-duty, food grade suction hose for dry wet material applications. Hose complies with applicable FDA and 3A requirements as well as USDA for use in meat and poultry plants. Clear PVC and clear helix construction allows for visual confirmation of material flow. Smooth bore eliminates material build up. Heavy corrugation provides high flexibility.



## TECHNICAL DATA

Construction	Corrugated, clear, flexible PVC with smooth bore and a rigid, clear PVC right-handed helix
Safety Factor	3:1
Temperature	-4°F to +150°F
Branding	TEXCEL® SIGMA-FD™ - FOOD GRADE SUCTION HOSE -<ID>-LOT
Compared To	WT/200 SFG
Safety Note	Service temperature depends on actual application
Features	FDA, USDA and 3A compliant

I.D.	#	O.D.	Std. Length	Working Pressure (psi)	Vacuum (in./HG)	Bend Radius	Lbs./Ft.
1-½"	SPVC-FD-1.5	1.82"	100'	45	29	2.5"	0.35
2"	SPVC-FD-2.0	2.35"	100'	40	29	3"	0.50
2-½"	SPVC-FD-2.5	2.87"	100'	35	29	5"	0.68
3"	SPVC-FD-3.0	3.50"	100'	35	29	6"	1.00
4"	SPVC-FD-4.0	4.63"	100'	30	29	8"	1.52
6"	SPVC-FD-6.0	6.73"	100'	30	25	12"	3.05
8"	SPVC-FD-8.0	9.04"	20'	20	25	16"	5.32



texcelindustrial.com

800.231.7116





# SIGMA-FDW™

FDA PVC Grounded Food Grade Suction Hose

Heavy-duty, food grade suction hose with embedded copper grounding wire for dry wet material applications. Hose complies with applicable FDA and 3A requirements as well as USDA for use in meat and poultry plants. Clear PVC and clear helix construction allows for visual confirmation of material flow. Smooth bore eliminates material build up. Heavy corrugation provides high flexibility. Embedded wire prevents static electricity build up.



## TECHNICAL DATA

Construction	Corrugated, clear, flexible PVC with smooth bore and a rigid, clear PVC right-handed helix with embedded copper wire for static dissipation
Safety Factor	3:1
Temperature	-4°F to +150°F
Branding	TEXCEL® SIGMA-FDW™ - GROUNDED FOOD GRADE SUCTION HOSE -<ID>-LOT
Compared To	WE/ST 200 SFG
Safety Note	Service temperature depends on actual application
Features	FDA, USDA and 3A compliant

I.D.	Part Number	O.D.	Std. Length	Working Pressure (psi)	Vacuum (in./HG)	Bend Radius	Lbs./Ft.
1-1/2"	SPVC-FDW-1.5	1.82"	100'	45	29	2.5"	0.44
2"	SPVC-FDW-2.0	2.35"	100'	40	29	3"	0.58
2-1/2"	SPVC-FDW-2.5	2.87"	100'	35	29	5"	0.75
3"	SPVC-FDW-3.0	3.50"	100'	35	29	6"	1.07
4"	SPVC-FDW-4.0	4.63"	100'	30	29	8"	1.52
5"	SPVC-FDW-5.0	5.63"	100'	30	25	10"	2.39
6"	SPVC-FDW-6.0	6.73"	100'	30	25	12"	3.12



texcelindustrial.com

800.231.7116



# SIGMA-POLY MHH™

Polyurethane Food Grade Suction & Discharge Hose


Heavy-duty construction that complies with all applicable FDA requirements. Clear polyurethane and blue PVC helix construction allows for visual confirmation of material flow. Smooth bore construction eliminates material build up. Yarn reinforced for discharge applications. Heavy corrugation provides extra flexibility. Embedded wire prevents static electricity build up.



## TECHNICAL DATA

Construction	Clear, flexible polyurethane with a blue, tough vinyl right-handed helix; synthetic yarn reinforcement, embedded copper wire for grounding
Safety Factor	3:1
Temperature	-40°F to +150°F
Branding	TEXCEL® SIGMA-POLY MHH™ - POLYURETHANE FOOD GRADE SUCTION / DISCHARGE HOSE -<ID>-LOT
Compared To	2020
Safety Note	Grounding wire must be properly terminated at both ends in order to dissipate static electricity
Features	FDA and USDA compliant, Phthalate Free

I.D.	Part Number	O.D.	Std. Length	Working Pressure (psi)	Vacuum (in./HG)	Bend Radius	Lbs./Ft.
3"	SPVC-MHH-3.0	3.78"	100'	100	29	10"	1.18
4"	SPVC-MHH-4.0	4.85"	100'	75	29	12"	1.58
5"	SPVC-MHH-5.0	5.80"	20'/50'/100'	70	28	14"	2.47
6"	SPVC-MHH-6.0	6.93"	20'/50'/100'	70	28	14"	2.86



texcelindustrial.com

800.231.7116





# SIGMA-ULTRAVAC-SBR™

SBR Vacuum Hose

Ultravac SBR™ is a specially compounded vacuum hose that is suitable for use in a multitude of wet and dry material applications. Being lightweight and flexible, Ultravac SBR™ is the ideal hose for vacuum trucks, hydro-excavators, and sewer cleaning equipment. Its static dissipative carbon black tube makes it suitable for handling sand, gravel, dry cement, iron chips, grains and other light abrasives.



## TECHNICAL DATA

Construction	Static dissipating, SBR blended tube with a rigid right-handed PVC helix
Safety Factor	3:1
Temperature	-40°F to +158°F
Branding	SIGMA SERIES - ULTRAVAC SBR-<ID>-LOT
Compared To	180 AR
Features	Excellent flexibility when compared to PVC/polyurethane hose

I.D.	Part Number	O.D.	Std. Length	Working Pressure (psi)	Vacuum in./HG	Bend Radius	Lbs./Ft.
1 1/2"	SP-SBR-1.5	1.82"	100'	45	29	2"	0.35
2"	SP-SBR-2.0	2.35"	100'	40	29	3"	0.52
2 1/2"	SP-SBR-2.5	2.95"	100'	35	29	3"	0.90
3"	SP-SBR-3.0	3.5"	100'	35	29	3"	1.08
4"	SP-SBR-4.0	4.63"	50', 100'	30	29	5"	1.80
5"	SP-SBR-5.0	5.76"	50', 100'	30	28	5"	2.45
6"	SP-SBR-6.0	6.73"	50', 100'	30	28	9"	3.05
8"	SP-SBR-8.0	9.04"	50'	30	27	15"	5.63



texcelindustrial.com

800.231.7116

WARNING: Cancer and Reproductive Harm  
www.P65Warnings.ca.gov

# SIGMA-ULTRAVAC™

Polyurethane Vacuum Hose

Heavy-duty, abrasion-resistant suction hose for use in a variety of wet and dry, industrial vacuum applications including: vacuum trucks, hydro-excavators, sewer cleaners, street sweepers. SIGMA-ULTRAVAC™ is ideal for handling a wide range of materials, such as crushed rock, sand, pea gravel, dry-cement, grains and slurries. Made of with a permanently conductive tube that remains flexible at low temperatures for ease of handling.



## TECHNICAL DATA

Construction	Smooth permanently conductive, high abrasion resistant, polyurethane liner with a black, specially formulated polymer and a rigid PVC left-handed helix
Safety Factor	3:1
Temperature	-40°F to +158°F
Branding	TEXCEL® SIGMA-ULTRAVAC™ - POLYURETHANE SUCTION HOSE -<ID>-LOT
Safety Note	NOT recommended for constant contact with fuels or petroleum products  Service temperature depends on actual application
Compare To	ARVAC-SW
Features	Superior flexibility at low temperatures

I.D.	Part Number	O.D.	Std. Length	Working Pressure (psi)	Vacuum in./HG	Bend Radius	Lbs./Ft.
2"	SP-VAC-2.0-100	2-36/64"	100'	30	29	2"	0.74
3"	SP-VAC-3.0-100	3-38/64"	100'	30	29	3"	1.11
4"	SP-VAC-4.0-100	4-47/64"	100'	30	29	4"	1.80
5"	SP-VAC-5.0-100	5-33/64"	100'	30	27	6"	2.32
6"	SP-VAC-6.0-100	6-49/64"	100'	15	27	8"	2.86
8"	SP-VAC-8.0-50	8-7/8"	50'	15	27	14"	4.27

WARNING: Cancer and Reproductive Harm  
www.P65Warnings.ca.gov

texcelindustrial.com

800.231.7116





# SIGMA-URE-B™

Polyurethane Material Handling Hose with PVC Cover


Abrasion-resistant, polyurethane tube for material handling in dry applications, such as sandblast recovery lines, roof rock cleaning and other abrasive applications. Made of static-dissipating material that remains flexible at low temperatures for ease of handling.



## TECHNICAL DATA

Construction	Black, flexible PVC and smooth with black, rigid, right-handed helix and smooth, polyurethane liner
Safety Factor	3:1
Temperature	-40°F to +150°F
Compared To	UBK
Safety Note	Service temperature depends on actual application

I.D.	# Part Number	O.D.	Std. Length	Working Pressure (psi)	Vacuum (in./HG)	Bend Radius	Lbs./Ft.
2"	SPVC-URE-B-2.0	2.40"	50'/100'	40	29	2"	0.51
2-1/2"	SPVC-URE-B-2.5	3.10"	50'/100'	40	29	4"	0.77
3"	SPVC-URE-B-3.0	3.55"	50'/100'	40	29	4"	0.87
4"	SPVC-URE-B-4.0	4.68"	50'/100'	35	29	6"	1.55
5"	SPVC-URE-B-5.0	5.71"	50'/100'	30	28	10"	2.30
6"	SPVC-URE-B-6.0	7.05"	20'/50'/100'	30	28	12"	3.40
8"	SPVC-URE-B-8.0	9.05"	20'/50'	30	28	15"	4.88

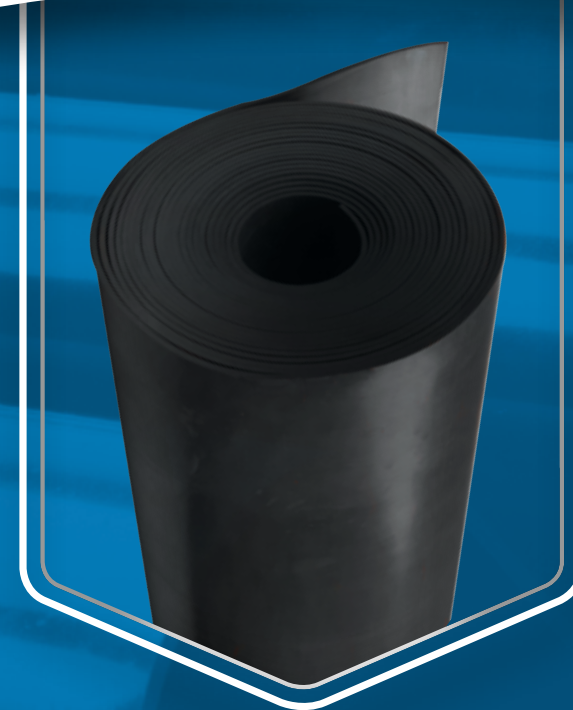

COMPRESSED SHEET



SHEET RUBBER



SKIRTBOARD




# SIGMA-URE HD BLUE™

Heavy-Duty Polyurethane Material Handling Hose

Premium-quality, material handling hose designed with a thick, heavy-duty, smooth polyurethane lining. Ideal for dry applications where high abrasion resistance is required, as well as flexibility in sub-zero temperatures.



## TECHNICAL DATA

Construction	Clear, thick, heavy-duty, smooth, polyurethane lining with a blue, HMW PVC, formulated for static dissipation and a rigid PVC, right-handed helix	
Safety Factor	3:1	
Temperature	-40°F to +150°F	
Branding	TEXCEL® SIGMA-URE-HD BLUE™ - HEAVY DUTY MATERIAL HANDLING HOSE -<ID>-LOT	
Compared To	Ureflex-2	
Safety Note	Flexibility in sub-zero temperature Service temperature depends on actual application	


# GAMMA™-HTA

Hot Tar and Asphalt Hose

This rugged hose is specifically designed for the transfer of petroleum-based products such as high temperature asphalt, tar, and hot oils. Suitable for suction and discharge service on rail transport cars, tank trucks, bulk stations, storage tanks and disposing units.



## TECHNICAL DATA

Tube	Black, special synthetic acrylic rubber, heat and abrasion resistant	
Cover	Black, CR anti-static, with a smooth abrasion, weather and heat resistant wrapped cover	
Reinforcement	High tensile tire cord plies; helix wire	
Safety Factor	4:1	
Temperature	-20°F to +350°F (intermittent)	
Branding	TEXCEL® GAMMA™-HTA - HOT TAR & ASPHALT HOSE 150 PSI W.P.	
Safety Note	Texcel recommends using Dixon Valve and Coupling's Boss™ 4-Bolt Clamp System for Hot Tar and Asphalt hose. Please consult Dixon's selection and installation recommendations, including bolt re-tightening procedures, to insure proper hose assembly.  Maximum service temp. 350°F, intermittent use only	

I.D.	# Part Number	O.D.	Std. Length	Working Pressure (psi)	Vacuum (in./HG)	Bend Radius	Lbs./Ft.
2"	SPVC-URE-HD-2.0	2.43"	100'	40	29	4"	0.59
3"	SPVC-URE-HD-3.0	3.70"	100'	40	29	6"	1.23
4"	SPVC-URE-HD-4.0	4.80"	100'	35	29	10"	2.02
5"	SPVC-URE-HD-5.0	5.80"	20'/50'/100'	35	28	15"	2.57
6"	SPVC-URE-HD-6.0	6.87"	20'/50'/100'	30	28	18"	3.84

I.D.	# Part Number	O.D.	Std. Length	Working Pressure (psi)	Vacuum (in./HG)	Bend Radius	Lbs./Ft.
2"	GHTA15S1-2.0	2-46/64"	100'/200'	150	29	10"	1.80
3"	GHTA15S1-3.0	3-59/64"	100'/200'	150	29	15"	2.94
4"	GHTA15S1-4.0	4-51/64"	100'/200'	150	29	20"	3.89





# GAMMA™-HEAT

## Hot Air Blower Hose

High heat-resisting EPDM blower hose made with premium-grade materials for reliable service life when connecting the blower to flow lines on dry-bulk trailers.



### TECHNICAL DATA

Tube	Black, high heat-resisting EPDM	
Cover	Black or brown*, smooth high heat-resisting EPDM	
Reinforcement	High tensile tire cord plies; helix wire	
Safety Factor	4:1	
Temperature	-40°F to +300°F continuous; 350°F intermittent	
Branding	TEXCEL® GAMMA™ - HEAT - HOT AIR BLOWER HOSE 150 PSI W.P.	

\*The material code defaults to a brown cover. To order the black cover insert the letter B before hyphen in part number

I.D.	Part Number	O.D.	Std. Length	Bend Radius	Working Pressure (psi)	Vacuum (in./HG)	Lbs./Ft.
3"	GHE15S1-3.0	3-33/64"	100'/200'	12"	150	29	1.75
4"	GHE15S1-4.0	4-9/16"	100'/200'	16"	150	29	2.40

# GAMMA™-BULK

## Dry Bulk Material Discharge Hose

Soft-wall discharge hose used in the transfer of dry materials and slurries. Ideal for dry cement, pebble lime and other abrasive media.



### TECHNICAL DATA

Tube	Black, abrasion-resistant NR/SBR, static-dissipating materials	
Cover	Black, abrasion-resistant NR/SBR	
Reinforcement	High tensile tire cord plies	
Safety Factor	4:1	
Temperature	-40°F to +180°F	
Branding	TEXCEL® GAMMA™-BULK - DRY CEMENT DISCHARGE HOSE STATIC CONDUCTIVE XX TUBE 75 PSI W.P.	

I.D.	Part Number	Tube Gauge	O.D.	Std. Length	Working Pressure (psi)	Number of Plies	Lbs./Ft.
4"	GBU75S1B-4-4	1/8"	4-7/16"	100'	75	2	1.72
	GBU75S1B-4-6	3/16"	4-5/8"	100'	75	2	2.20
	GBU75S1B-4-8	1/4"	4-51/64"	100'	75	2	2.61
5"	GBU75S1B-5-4	1/8"	5-15/32"	100'	75	2	2.27
	GBU75S1B-5-6	3/16"	5-5/8"	100'	75	2	2.75
	GBU75S1B-5-8	1/4"	5-51/64"	100'	75	2	3.25





# TEX-BLAST

Sandblast Hose

Used with grit, aluminum oxide, glass beads, etc., and is ideal for rugged use in shipyards and construction sites.



## TECHNICAL DATA

Tube	Black, SBR/GUM, wear-resistant, static-dissipating materials
Cover	Black, SBR (pinpricked)
Reinforcement	High tensile tire cord plies
Safety Factor	4:1
Temperature	-40°F to +190°F
Branding	TEXCEL® TEX-BLAST - PREMIUM GRADE SANDBLAST HOSE 150 PSI W.P.

I.D.	#	O.D.	Std. Length	Working Pressure (psi)	Fabric Plies	Lbs./Ft.
1/2"	BLAST-.50	1-1/8"	50'	150	2	0.40
3/4"	BLAST-.75	1-1/2"	50'	150	4	0.57
1"	BLAST-1.0	1-7/8"	50'	150	4	0.94
1-1/4"	BLAST-1.25	2-1/8"	50'	150	4	1.18
1-1/2"	BLAST-1.50	2-3/8"	50'/100'	150	4	1.35



texcelindustrial.com

800.231.7116

WARNING: Cancer and Reproductive Harm  
www.P65Warnings.ca.gov

# GAMMA™-COMM DISCHARGE

Commodity Discharge Hose

Soft-wall hose designed with a high abrasion-resistant tube. Ideal for applications where the discharging of wet or dry abrasive media is required.



## TECHNICAL DATA

Tube	Black, abrasion-resistant NR/SBR, static-dissipating materials
Cover	Black, SBR
Reinforcement	High tensile tire cord plies
Safety Factor	4:1
Temperature	-40°F to +180°F
Branding	TEXCEL® GAMMA™-COMM DISCH - BULK COMMODITY DISCHARGE HOSE STATIC CONDUCTIVE TUBE XXX PSI W.P.



I.D.	#	O.D.	Tube Gauge	Std. Length	Working Pressure (psi)	Number of Plies	Lbs./Ft.
2"	GCOMM-D-B1-2.0	2-45/64"	3/16"	100'	150	2	1.51
2-1/2"	GCOMM-D-B1-2.5	3-13/64"	3/16"	100'	125	2	1.82
3"	GCOMM-D-B1-3.0	3-46/64"	3/16"	100'	125	2	2.20
4"	GCOMM-D-B1-4.0	4-45/64"	3/16"	100'	100	2	2.79
4-1/2"	GCOMM-D-B1-4.5	5-13/64"	1/4"	100'	75	2	3.40
5"	GCOMM-D-B1-5.0	5-45/64"	1/4"	100'	75	2	3.78
6"	GCOMM-D-B1-6.0	6-45/64"	1/4"	100'	75	2	4.06

WARNING: Cancer and Reproductive Harm  
www.P65Warnings.ca.gov

texcelindustrial.com

800.231.7116





# GAMMA™-BLACK COMM

Black Commodity Suction Hose

A hose similar to our renowned "TEX-COMMODITY" green suction hose, but with a black cover and tube, made of static-dissipating materials where food and potable water features are not necessary.



## TECHNICAL DATA

Tube	Black, abrasion-resistant NR/SBR, static-dissipating materials	
Cover	Black, SBR	
Reinforcement	High tensile tire cord plies; helix wire	
Safety Factor	4:1	
Temperature	-20°F to +180°F	
Branding	TEXCEL® GAMMA™-BLACK COMM - BULK COMMODITY SUCTION HOSE STATIC CONDUCTIVE TUBE XXX PSI W.P.	
Features	Size 5"-12" are corrugated for extra flexibility	

I.D.	Part Number	O.D.	Tube Gauge	Std. Length	Working Pressure (psi)	Vacuum (in./HG)	Bend Radius	Lbs./Ft.
2"	GCOMM-S-B1-2.0	2-51/64"	3/16"	100'	150	28	5"	1.87
2-1/2"	GCOMM-S-B1-2.5	3-27/64"	3/16"	100'	125	28	8"	2.26
3"	GCOMM-S-B1-3.0	3-59/64"	3/16"	100'	125	28	10.5"	2.64
4"	GCOMM-S-B1-4.0	4-63/64"	3/16"	100'	100	28	12"	4.02
5"	GCOMM-S-B1-5.0	6-1/16"	1/4"	50'	75	28	13.5"	5.18
6"	GCOMM-S-B1-6.0	7-1/8"	1/4"	50'	75	25	15"	6.43
8"	GCOMM-S-B1-8.0	9-1/64"	1/4"	50'	50	20	17"	9.89
10"	GCOMM-S-B1-10.0	11-5/32"	1/4"	25'	50	20	19"	13.79
12"	GCOMM-S-B1-12.0	13-15/64"	1/4"	25'	50	20	25"	17.41



texcelindustrial.com

800.231.7116

WARNING: Cancer and Reproductive Harm  
www.P65Warnings.ca.gov



# TEX-COMMODITY

FDA Commodity Hose

The "original Green Monster", TEX-COMMODITY is the premier material handling hose in the industry. Suitable for abrasive materials, wet or dry. Also used for foodstuffs, flour, plastic pellets, etc. Ideal for sandblast return operations. Tube meets FDA requirements for food and potable water.



## TECHNICAL DATA

Tube	White, natural gum rubber	
Cover	Green, SBR	
Reinforcement	High tensile tire cord plies; helix wire	
Safety Factor	4:1	
Temperature	-40°F to +190°F	
Branding	TEXCEL® TEX-COMMODITY - FDA COMMODITY HOSE XXX PSI W.P.	
Features	Size 5"-12" are corrugated for extra flexibility Meets FDA requirements Superior abrasion resistance	

I.D.	Part Number	O.D.	Tube Gauge	Std. Length	Working Pressure (psi)	Vacuum (in./HG)	Bend Radius	Lbs./Ft.
2"	COMM-2.0	2-27/32"	1/4"	100'	150	29	5"	2.60
2-1/2"	COMM-2.5	3-13/32"	1/4"	100'	150	29	8"	3.10
3"	COMM-3.0	3-7/8"	1/4"	100'	150	29	10.5"	3.62
4"	COMM-4.0	4-15/16"	1/4"	100'	100	29	12"	5.57
5"	COMM-5.0	5-15/16"	1/4"	50'	75	28	13.5"	7.00
6"	COMM-6.0	6-59/64"	5/16"	50'	50	25	15"	7.25
8"	COMM-8.0	9-3/32"	3/8"	50'	50	20	17"	10.80
10"	COMM-10.0	11-5/16"	3/8"	25'	50	20	19"	15.10
12"	COMM-12.0	13-7/16"	3/8"	25'	50	20	25"	18.20

WARNING: Cancer and Reproductive Harm  
www.P65Warnings.ca.gov

texcelindustrial.com

800.231.7116







# TEX-ELEPHANT

## Elephant Trunk Hose

Premium-quality hose made with 1/8" tube gauge for high abrasion and cut resistance. Ideal for cement and abrasives gravity flow, and for use in sleeve applications.



### TECHNICAL DATA

Tube	Tan, pure gum	
Cover	Black, NR/SBR compound	
Reinforcement	High tensile synthetic plies	
Safety Factor	3:1	
Temperature	-20°F to +180°F	
Branding	TEXCEL™ TEX-ELEPHANT - ELEPHANT TRUNK HOSE 50 PSI W.P.	

I.D.	Part Number	O.D.	Tube Gauge	Std. Length	Working Pressure (psi)	Lbs./Ft.
8"	ELEP-8.0	8-33/64"	1/8"	50'	50	3.84
10"	ELEP-10.0	10-33/64"	1/8"	50'	50	5.50
12"	ELEP-12.0	12-33/64"	1/8"	25'	50	6.00
14"	ELEP-14.0	14-33/64"	1/8"	25'	50	7.00
16"	ELEP-16.0	16-33/64"	1/8"	25'	50	8.15

# TEX-DREDGE

## Dredge Sleeve

A rugged, abrasion-resistant tube and cover for flexible connections between pipes used in dredging applications.



### TECHNICAL DATA

Tube	Black, 3/8", abrasion-resistant SBR compound	
Cover	Black, 3/32", weather and abrasion-resistant SBR	
Reinforcement	High tensile synthetic plies	
Safety Factor	3:1	
Temperature	-20°F to +180°F	

I.D.	Part Number	O.D.	Tube Gauge	Std. Length	Working Pressure (psi)	Lbs./Ft.
6-5/8"	DREDGE-6	8"	3/8"	50'	125	8.20
8-5/8"	DREDGE-8	10-3/16"	3/8"	50'	125	11.60
10-3/4"	DREDGE-10	12-5/16"	3/8"	50'	125	14.60
12-3/4"	DREDGE-12	14-1/2"	3/8"	50'	125	18.60





# GAMMA™-WIRE CRETE

Wire Concrete Placement Hose

A heavy-duty hose designed to handle the most abrasive applications and weather conditions. Suitable for handling wet concrete in areas where flex is critical. Ideal for use on high pressure concrete pumps or boom trucks where a tough, durable hose is required for high pressure concrete pumping and placing applications.



## TECHNICAL DATA

Tube	Black, wear-resistant, GUM/SBR blend	
Cover	Black, SBR, cut and gouge-resistant	
Reinforcement	Multiple steel wire plies	
Safety Factor	2:1 (per ASME standards)	
Temperature	-40°F to +200°F	
Branding	TEXCEL GAMMA™ SERIES CONCRETE PLACEMENT HOSE – WIRE XX" 1230 PSI (85 BAR) WP XXLBS/FT (F.W.C.) MEETS OR EXCEEDS ASME B30.27-2009	
Features	Meets ASME B3.27-2009 specifications	

I.D.	# Part Number	O.D.	Std. Length	Working Pressure psi/bar	Burst Pressure psi/bar	Bend Radius	Lbs./Ft.
2"	GWC12S1-2.0	2-3/4"	100'	1230/85	2460/170	12"	1.86
2-1/2"	GWC12S1-2.5	3-3/8"	100'	1230/85	2460/170	16"	2.67
3"	GWC12S1-3.0	3-15/16"	100'	1230/85	2460/170	18"	3.37
4"	GWC12S1-4.0	5-1/16"	100'	1230/85	2460/170	24"	5.31
5"	GWC12S1-5.0	6-1/8"	50'	1230/85	2460/170	30"	6.57

# TEX-CRETE

Textile Concrete Hose

Designed to provide the ultimate combination of handling ease, abuse resistance and long service life required for plaster, grout and concrete placement applications. Ideal for concrete pumping applications.



## TECHNICAL DATA

Tube	Black, wear-resistant, GUM/SBR blend	
Cover	Black, SBR, cut and gouge-resistant	
Reinforcement	Multiple plies of high tensile tire cord	
Safety Factor	2:1 (per ASME standards)	
Temperature	-40°F to +200°F	
Branding	TEXCEL® TEX-CRETE - FABRIC CONCRETE PLACEMENT HOSE 1230 PSI (85 BAR) W.P. XXX LBS/FT (F.W.C)	

I.D.	# Part Number	O.D.	Std. Length	Working Pressure psi/bar	Burst Pressure psi/bar	Bend Radius	Lbs./Ft.
1-1/4"	CRETE-1.25	2"	100'	1230/85	2460/170	8"	0.86
1-1/2"	CRETE-1.5	2-3/16"	100'	1230/85	2460/170	10"	0.92
2"	CRETE-2.0	2-49/64"	50'/100'	1230/85	2460/170	12"	1.45
2-1/2"	CRETE-2.5	3-11/32"	100'	1230/85	2460/170	14"	1.71
3"	CRETE-3.0	4"	50'/100'	1230/85	2460/170	15"	2.40
3-1/2"	CRETE-3.5	4-31/64"	100'	1230/85	2460/170	16"	3.07
4"	CRETE-4.0	5-5/32"	100'	1230/85	2460/170	18"	4.06
4-1/2"	CRETE-4.5	5-19/32"	100'	1230/85	2460/170	21"	4.22
5"	CRETE-5.0	6-19/64"	100'	1230/85	2460/170	24"	5.60
6"	CRETE-6.0	7-21/64"	100'	1230/85	2460/170	30"	6.80





# SIGMA-DUTY MAX™









## NBR Suction Hose

Duty Max is a heavy-duty, all-weather, suction hose for use in liquid manure handling, septic and wastewater handling, water suction, and general oilfield applications. Please note that service life may vary based on media being conveyed and operating conditions. The PVC helix makes for increased toughness over rough surfaces and around corners making it the perfect product for harsh conditions.



### TECHNICAL DATA

Construction	NBR/PVC tube with a PVC helix
Safety Factor	3:1
Temperature	-40°F to +140°F (-40°C to +60°C)
Features	Superior flexibility even at sub-zero temperatures Lightweight, with floating capabilities

 I.D.	 Part Number	 O.D.	 Std. Length	 Working Pressure (psi)	 Vacuum (in./HG)	 Bend Radius	 Lbs./Ft.
1-½"	SP-DUTY-1.5-100	1.82"	100'	50	29.8	3.0"	0.44
2"	SP-DUTY-2.0-100	2.43"	100'	50	29.8	5.0"	0.74
3"	SP-DUTY-3.0-100	3.55"	100'	43	29.8	7.0"	1.21
4"	SP-DUTY-4.0-100	4.62"	100'	38	29.8	11.0"	1.95
6"	SP-DUTY-6.0-100	6.81"	20'/100'	23	28.0	20.0"	3.23

## CERTIFICATIONS & AGENCIES

FDA	The Food & Drug Administration
FDA title 21 part.177.2600	This is a regulation that the FDA puts out regarding polymers that come in contact with food meant for human consumption. Section 177.2600, paragraph E, mentions that the food-contact surface of the rubber article when extracted with distilled water at reflux temperature, shall yield total extractives not to exceed 20 milligrams per square inch during the first 7 hours of extraction, nor to exceed 1 milligram per square inch during the succeeding 2 hours of extraction.
BfR	Bundesinstitut für Risikobewertung, the German version of the FDA that outlines how polymers should be used in the manufacturing process so that polymers do not endanger human health.
D.M. 21 / 03 / 73	This stands for "Decree of the Minister of Health of 21 March 1973". An Italian Regulation that deals with polymers that come in contact with food stuffs, mainly aqueous, oily or fatty foods.
ADI Free	Free of any Animal-Derived Ingredients
Wine Glass & Fork Symbol	The international symbol for "food safe" material. The symbol identifies that material used in the product are safe for food contact. It is used in North America, Europe and Asia but is now mandatory in Europe after Framework Regulation EC 1935 / 2004.
EC 1935 / 2004	EC means the European Community a.k.a., the European Commission. This regulation is from the European Parliament and of the Council of 27 October 2004 on materials and articles intended to come into contact with food.
KTW	The German agency for water and gas, Deutsche Vereinigung des Gas -und Wasserfaches, defines a series of recommendations for materials coming in contact with water.

## Compliance Information:

3A	Material approved by 3A Sanitary Standards, Inc. for multi-use plastic materials, number: 20-25, as product contact surfaces in equipment for production, processing and handling of milk and dairy products.
BSE/TSE	The majority of the raw materials used in formulations are not manufactured or derived from materials of animal origin. Nor do products come into contact with materials of animal origin during processing. Suppliers of raw materials have assured that their compounds exceed the relevant European Guidance on minimizing the Risk of Transmitting Animal Spongiform Encephalopathy Agents Via Human and Veterinary Medical Products.
FDA	Material conforms to CFR title 21, parts 170-199.
RoHS	The product complies with the requirements of the EU directive <sup>2002/95</sup> /EC which is on the restriction of the use of certain hazardous substances in electrical and electronic equipment.
USDA	Hose approved by the US Department of Agriculture for use in federally inspected meat and poultry plants.



## CERTIFICATIONS & AGENCIES



# TEX-STEAM

Steam Hose

Rugged, wire-braid steam hose recommended for saturated and super-heated steam applications in chemical plants, shipyards and industrial plants.



## TECHNICAL DATA

Tube	Black, heat-resistant EPDM
Cover	Black, EPDM (pinpricked)
Reinforcement	High tensile steel wires
Safety Factor	10:1
Temperature	-40°F to 410°F for saturated steam -40°F to 450°F for superheated
Branding	TEXCEL TEX-STEAM WIRE BRAID STEAM HOSE – 250PSI AT 450F/SATURATED STEAM 410F – DO NOT ALTERNATE STEAM AND WATER – DRAIN AFTER USE (embossed)
Safety Note	Drain the hose after each use for maximum hose life  Do not alternate use between steam and water  Texcel recommends using Dixon Valve and Coupling's Crimp Boss™ Steam Fittings or Boss™ 4-Bolt Clamp System for Tex-STEAM hose. Please consult Dixon for proper coupling procedures.

Superheated steam will reduce the life of the hose

I.D.	Part Number	O.D.	Std. Length	Working Pressure (psi)	Bend Radius	Lbs./Ft.
1/2"	STEAM-.50	15/16"	50'	250	3"	0.37
3/4"	STEAM-.75	1-1/4"	50'	250	4"	0.57
1"	STEAM-1.0	1-1/2"	50'	250	6"	0.70
1-1/2"	STEAM-1.5	2-1/16"	50'/100'	250	8"	1.10
2"	STEAM-2.0	2-1/16"	50'	250	10"	1.50
2-1/2"	STEAM-2.5	3-7/32"	100'	250	11"	2.29
3"	STEAM-3.0	3-25/32"	100'	250	13-1/2"	2.85

# BALTHAZAR™

Winery Hose

BALTHAZAR™ winery hose is a smooth covered hose formulated for the suction and delivery of wine, fruit juice, and soft drinks. The BALTHAZAR™ hose has a white, smooth EPDM tube to ensure food quality and is odorless and does not alter taste. Its high working temperature allows for the sterilization of the hose with steam at 230°F for 30 minutes. Meets FDA title 21 part.177.2600(e) for liquid foods, BfR, ADI free, EC 1935 / 2004.



## TECHNICAL DATA

Tube	White, EPDM
Cover	Gray, EPDM
Reinforcement	High strength synthetic plies with steel wire spirals
Safety Factor	3:1
Temperature	-40°F to +248°F
Branding	TEXCEL® BALTHAZAR™ WINERY HOSE 150PSI (10BAR) W.P. TEMP. -40F TO 248F (-40C TO 120C) STERILIZATION AT 230F FOR 30 MINS FDA BFR ADI FREE
Safety Note	It is recommended that all food grade hose be thoroughly flushed prior to initial use
Features	FDA, USDA compliant



I.D.	Part Number	O.D.	Std. Length	Working Pressure (psi)	Vacuum (in./HG)	Bend Radius	Lbs./Ft.
3/4"	WINE-.75-100	1 9/64"	100'	150	29	1.5"	0.45
1"	WINE.1.0-100	1 3/8"	100'	150	29	1.75"	0.54
1-1/4"*	WINE-1.25-100	1 23/32"	100'	150	29	3"	0.83
1-1/2"	WINE-1.5-100	1 31/32"	100'	150	29	4"	0.93
2"	WINE-2.0-100	2 17/32"	100'	150	29	6"	1.26
2-1/2"*	WINE-2.5-100	3 1/32"	100'	150	29	7"	1.75
3"	WINE-3.0-100	3 1/2"	100'	150	29	9"	2.02
4"	WINE-4.0-100	4 9/16"	100'	150	29	12"	3.09



\*Special order items only.

## SATURATED (NOT SUPER-HEATED) STEAM WARNING

Steam heat is hotter than 212°F and increases in temperature as pressure increases.

Consult with your coupling manufacturer to make sure the correct fittings are used for the application and for guidelines on proper assembly techniques.

If not controlled properly, exposure to steam can be hazardous and could cause serious injury or even death. In order to avoid serious injury or death, proper hose selection, installation, usage and maintenance is necessary.



# BALTHAZAR™ HD

Heavy-Duty Winery Hose

Balthazar™ HD winery hose is a heavy-duty corrugated hose formulated for the most abusive applications in the suction and delivery of wine, fruit juice, and soft drinks. The Balthazar™ HD hose has a white, smooth NBR tube to ensure food quality and is odorless and does not alter taste. It has a higher working pressure to help speed up loading and unloading times. The UHMWPE cover not only dramatically increases its abrasion resistance but is antimicrobial and offers increased dragability. The polyamide helix also makes this hose crushproof. Its higher working temperature allows for the sterilization of the hose with steam at 230°F for 30 minutes. Meets FDA title 21 part.177.2600(e) for liquid foods, BfR, ADI free, EC 1935 / 2004.



## TECHNICAL DATA

Tube	White, NBR	
Cover	Crushproof, Corrugated, Purple, EPDM with a clear UHMWPE cover	
Reinforcement	High strength synthetic plies with polyamide spirals, note: 4" uses steel helix	
Safety Factor	3:1	
Temperature	-40°F to +248°F	
Branding	TEXCEL® BALTHAZAR™ HD Winery Hose 250PSI (17 BARS) W.P. Crushproof UHMW COVER TEMP. -40F to 248F (-40C to 120C) STERILIZATION at 230F for 30 MINS FDA BfR ADI FREE	
Safety Note	It is recommended that all food grade hose be thoroughly flushed prior to initial use	
Features	FDA, USDA compliant Crushproof, UHMWPE abrasion-resistant, Antimicrobial cover Higher working pressure	



I.D.	# Part Number	O.D.	Std. Length	Working Pressure (psi)	Vacuum (in./HG)	Bend Radius	Lbs./Ft.
1"	WNHD-1.0-100	1 9/16"	100'	250	29	4"	0.65
1-1/4"	WNHD-1.25-100	1 27/32"	100'	250	29	5"	0.73
1-1/2"	WNHD-1.5-100	2 3/32"	100'	250	29	6"	0.80
2"	WNHD-2.0-100	2 49/64"	100'	250	29	8"	1.03
2-1/2"	WNHD-2.5-100	3 15/64"	100'	250	29	11"	1.41
3"	WNHD-3.0-100	3 15/16"	100'	250	29	12"	1.95
4"	WNHD-4.0-100*	4 61/64"	100'	250	29	14"	3.12

\*4" Balthazar HD uses a steel helix construction, is NOT crushproof



texcelindustrial.com

800.231.7116



# GROWLER™

Brewery Hose

GROWLER™ brewery hose is a heavy-duty hose formulated for the suction and delivery of beer, wine, alcohol, and soft drinks. The GROWLER™ hose has a white, smooth BIIR (butyl) rubber tube to ensure food quality and is odorless and does not alter taste. Its high working temperature allows for the sterilization of the hose with steam at 230°F for 30 minutes. Meets FDA title 21 part.177.2600(e) for liquid foods, BfR, ADI free, EC 1935 / 2004.



## TECHNICAL DATA

Tube	White, BIIR (BUTYL)	
Cover	Orange, EPDM	
Reinforcement	High strength synthetic plies with steel wire spirals	
Safety Factor	3:1	
Temperature	-40°F to +248°F	
Branding	TEXCEL® GROWLER™ BREWERS HOSE 150PSI (10 BAR) W.P. TEMP. -40F TO 248F (-40C TO 120C) STERILIZATION AT 230F FOR 30 MINS FDA BFR ADI FREE	
Safety Note	It is recommended that all food grade hose be thoroughly flushed prior to initial use	
Features	FDA, USDA compliant	



I.D.	# Part Number	O.D.	Std. Length	Working Pressure (psi)	Vacuum (in./HG)	Bend Radius	Lbs./Ft.
3/4"	GRLR-.75-100	1 7/32"	100'	150	29	1.5"	0.48
1"	GRLR-1.0-100	1 29/64"	100'	150	29	1.75"	0.58
1-1/4"	GRLR-1.25-100	1 47/64"	100'	150	29	3"	0.74
1-1/2"	GRLR-1.5-100	1 31/32"	100'	150	29	4"	0.97
2"	GRLR-2.0-100	2 33/64"	100'	150	29	6"	1.26
2-1/2"*	GRLR-2.5-100	3 5/32"	100'	150	29	7"	1.84
3"*	GRLR-3.0-100	3 45/64"	100'	150	29	9"	2.20
4"*	GRLR-4.0-100	4 23/32"	100'	150	29	12"	3.06



texcelindustrial.com

800.231.7116



\*Special order items only.



# ELIXIR™

Distillery Hose

ELIXIR™ distillery hose is specially formulated for the suction and delivery of alcohols up to 96%, wine, beer, potable water, and other related foodstuffs. The ELIXIR™ hose has a clear, UHMWPE tube to ensure food quality and is both odorless and does not alter taste. Its higher working temperature allows for it to be sterilized with steam at 230°F for 30 minutes. Meets FDA title 21 part.177.2600(e) for liquid foods, BfR, KTW, EC 1935 / 2004.



## TECHNICAL DATA

Tube	Clear, UHMWPE	
Cover	Green, EPDM	
Reinforcement	High strength synthetic plies with steel wire spirals	
Safety Factor	3:1	
Temperature	-4°F to +230°F	
Branding	TEXCEL® ELIXIR™ DISTILLERY HOSE 150 PSI (10 BAR) W.P. TEMP. -4F TO 230F (-20C TO 100C) STERILIZATION AT 230F FOR 30 MINS FDA BFR KTW	
Safety Note	It is recommended that all food grade hose be thoroughly flushed prior to initial use	
Features	FDA, USDA compliant	

\*Special order items only.

# DAIRY-KING™

Milk Hose

DAIRY-KING™ milk hose is specifically designed for the suction and delivery of milk and other fatty foods. The DAIRY-KING™ hose has a white, smooth, NBR rubber tube to ensure product quality, is odorless and does not alter taste. Its blue, smooth, cloth impression EPDM rubber cover offers abrasion-, ozone- and weather-resistance. This hose can be sterilized with steam at 230°F for 30 minutes. Meets FDA title 21 part.177.2600(f) for fatty foods, BfR, ADI free, D.M. 21/03/73, EC 1935 / 2004. Hose conform to 3A standards.



## TECHNICAL DATA

Tube	White, NBR	
Cover	Blue, EPDM	
Reinforcement	High strength synthetic plies with steel wire spirals	
Safety Factor	3:1	
Temperature	-40°F to +248°F	
Branding	TEXCEL® DAIRY-KING™ MILK HOSE 150 PSI (10 BAR) W.P. TEMP. -40F TO 248F (-40C TO 120C) STERILIZATION AT 230F FOR 30 MINS FDA BFR ADI FREE	
Safety Note	It is recommended that all food grade hose be thoroughly flushed prior to initial use	
Features	FDA, USDA and 3A compliant	

\*Special order items only.



I.D.	# Part Number	O.D.	Std. Length	Working Pressure (psi)	Vacuum (in./HG)	Bend Radius	Lbs./Ft.
3/4"	ELIX-.75-100	1 7/32"	100'	150	29	2.5"	0.48
1/2"	ELIX-.50-100	29/32"	100'	150	29	2"	0.39
1"	ELIX-1.0-100	1 29/64"	100'	150	29	3.5"	0.58
1-1/4"*	ELIX-1.25-100	1 47/64"	100'	150	29	4.25"	0.72
1-1/2"	ELIX-1.5-100	2"	100'	150	29	5"	0.91
2"	ELIX-2.0-100	2 41/64"	100'	150	29	7.5"	1.54
2-1/2"	ELIX-2.5-100	3 5/32"	100'	150	29	9"	1.69
3"	ELIX-3.0-100	3 5/8"	100'	150	29	11"	2.07
4"	ELIX-4.0-100	4 41/64"	100'	150	29	13"	3.03

I.D.	# Part Number	O.D.	Std. Length	Working Pressure (psi)	Vacuum (in./HG)	Bend Radius	Lbs./Ft.
3/4"	MILK-.75-100	1 9/64"	100'	150	29	2.5"	0.45
1"	MILK-1.0-100	1 3/8"	100'	150	29	3.5"	0.54
1-1/4"*	MILK-1.25-100	1 47/64"	100'	150	29	4.25"	0.83
1-1/2"	MILK-1.5-100	1 31/32"	100'	150	29	5"	0.93
2"	MILK-2.0-100	2 1/2"	100'	150	29	7.5"	1.26
2-1/2"*	MILK-2.5-100	3 1/32"	100'	150	29	9"	1.75
3"	MILK-3.0-100	3 1/2"	100'	150	29	11"	2.02
4"	MILK-4.0-100	4 9/16"	100'	150	29	13"	3.09



# SIGMA-FD™

FDA PVC Food-Grade Suction Hose

Heavy-duty, food-grade suction hose for dry/wet material applications. Hose complies with applicable FDA and 3A requirements as well as USDA for use in meat and poultry plants. Clear PVC and clear helix construction allows for visual confirmation of material flow. Smooth bore eliminates material build up. Heavy corrugation provides high flexibility.



## TECHNICAL DATA

Construction	Corrugated, clear, flexible PVC with smooth bore and a rigid, clear PVC, right-handed helix
Safety Factor	3:1
Temperature	-4°F to +150°F
Branding	TEXCEL® SIGMA-FD™ - FOOD GRADE SUCTION HOSE -<ID>-LOT
Compared To	WT/200 SFG
Safety Note	Service temperature depends on actual application  It is recommended that all food grade hose be thoroughly flushed prior to initial use
Features	FDA, USDA and 3A compliant. Phthalate Free

I.D.	Part Number	O.D.	Std. Length	Working Pressure (psi)	Vacuum (in./HG)	Bend Radius	Lbs./Ft.
1-1/2"	SPVC-FD-1.5	1.82"	100'	45	29	2.5"	0.35
2"	SPVC-FD-2.0	2.35"	100'	40	29	3"	0.50
2-1/2"	SPVC-FD-2.5	2.87"	100'	35	29	5"	0.68
3"	SPVC-FD-3.0	3.50"	100'	35	29	6"	1.00
4"	SPVC-FD-4.0	4.63"	100'	30	29	8"	1.52
6"	SPVC-FD-6.0	6.73"	100'	30	25	12"	3.05
8"	SPVC-FD-8.0	9.04"	20'	20	25	16"	5.32

# SIGMA-FDW™

FDA PVC Grounded Food-Grade Suction Hose

Heavy-duty, food-grade suction hose with embedded copper grounding wire for dry/wet material applications. Hose complies with applicable FDA and 3A requirements as well as USDA for use in meat and poultry plants. Clear PVC and clear helix construction allows for visual confirmation of material flow. Smooth bore eliminates material build up. Heavy corrugation provides high flexibility. Embedded wire prevents static electricity build up.



## TECHNICAL DATA

Construction	Corrugated, clear, flexible PVC with smooth bore and a rigid, clear PVC, right-handed helix with embedded copper wire for static dissipation
Safety Factor	3:1
Temperature	-4°F to +150°F
Branding	TEXCEL® SIGMA-FDW™ - GROUNDED FOOD GRADE SUCTION HOSE -<ID>-LOT
Compared To	WE/ST 200 SFG
Safety Note	It is recommended that all food grade hose be thoroughly flushed prior to initial use
Features	FDA, USDA and 3A compliant. Phthalate Free

I.D.	Part Number	O.D.	Std. Length	Working Pressure (psi)	Vacuum (in./HG)	Bend Radius	Lbs./Ft.
1-1/2"	SPVC-FDW-1.5	1.82"	100'	45	29	2.5"	0.44
2"	SPVC-FDW-2.0	2.35"	100'	40	29	3"	0.58
2-1/2"	SPVC-FDW-2.5	2.87"	100'	35	29	5"	0.75
3"	SPVC-FDW-3.0	3.50"	100'	35	29	6"	1.07
4"	SPVC-FDW-4.0	4.63"	100'	30	29	8"	1.52
5"	SPVC-FDW-5.0	5.63"	100'	30	25	10"	2.39
6"	SPVC-FDW-6.0	6.73"	100'	30	25	12"	3.12



## SATURATED (NOT SUPER-HEATED) STEAM WARNING

Steam heat is hotter than 212°F and increases in temperature as pressure increases.

Consult with your coupling manufacturer to make sure the correct fittings are used for the application and for guidelines on proper assembly techniques.

If not controlled properly, exposure to steam can be hazardous and could cause serious injury or even death. In order to avoid serious injury or death, proper hose selection, installation, usage and maintenance is necessary.





# TEX-WASHDOWN







300PSI Washdown Hose

TEX-WASHDOWN hose is the perfect solution for conveying water up to 199°F (93°C) for washdown service in dairies, creameries, breweries, distilleries, meat packing facilities, and food processing plants. Its high-quality, white EPDM cover offers mild abrasion-, ozone-, and weather-resistance.



## TECHNICAL DATA

Tube	Black, EPDM
Cover	White, EPDM
Reinforcement	Braided polyester cords
Safety Factor	4:1
Temperature	-40°F to +199°F
Branding	TEXCEL® TEX-WASHDOWN 300 PSI (20 BAR) W.P. WASHDOWN HOSE TEMP. -40F TO 199F (-40C TO 92C) 4:1 SAFETY FACTOR
Safety Note	It is recommended that all food grade hose be thoroughly flushed prior to initial use

					
I.D.	Part Number	O.D.	Std. Length	Working Pressure (psi)	Lbs./Ft.
1/2"	WASH-.5-300	29/32"	300'	300	0.25
3/4"	WASH-.75-300	1 17/64"	300'	300	0.39
1"	WASH-1.0-300	1 35/64"	300'	300	0.5



texcelindustrial.com

800.231.7116

WARNING: Cancer and Reproductive Harm  
www.P65Warnings.ca.gov



# TEX-SANITTRANS

FDA Sanitary Discharge Hose







Tube and cover designed for discharge or transfer of food and potable water. Highly resistant to animal fat and vegetable oils.



## TECHNICAL DATA

Tube	White, Nitrile
Cover	White or gray Neoprene
Reinforcement	High tensile strength tire cord plies
Safety Factor	3:1
Temperature	-22°F to +185°F
Branding	TEXCEL® TEX-SANITTRANS - SANITARY DISCHARGE HOSE 150 PSI W.P. MEETS FDA AND USDA
Safety Note	It is recommended that all food grade hose be thoroughly flushed prior to initial use
Features	FDA and USDA compliant



					
I.D.	Part Number	O.D.	Std. Length	Working Pressure (psi)	Lbs./Ft.
2"	SAND-2.0	2-25/64"	100'/200'	150	0.80
3"	SAND-3.0	3-7/16"	100'/200'	150	1.23
4"	SAND-4.0	4-7/16"	100'/200'	150	1.70

WARNING: Cancer and Reproductive Harm  
www.P65Warnings.ca.gov

texcelindustrial.com

800.231.7116





# TEX-SANIVAC

FDA Sanitary Vacuum Hose

Tube and cover designed for suction, discharge or transfer of food and potable water. Highly resistant to animal fat and vegetable oils.



## TECHNICAL DATA

Tube	White, Nitrile	
Cover	White or gray Neoprene	
Reinforcement	High tensile strength tire cord plies; dual helix wire	
Safety Factor	3:1	
Temperature	-22°F to +185°F	
Packaging	Coiled, double wrapped, ends capped	
Branding	TEXCEL® TEX-SANIVAC - SANITARY SUCTION HOSE 150 PSI W.P. MEETS FDA AND USDA	
Safety Note	It is recommended that all food grade hose be thoroughly flushed prior to initial use	
Features	FDA and USDA compliant	

I.D.	Part Number	O.D.	Std. Length	Working Pressure (psi)	Vacuum (in./HG)	Bend Radius	Lbs./Ft.
1-1/2"	SANV-1.5	2-1/64"	100'/200'	150	29	3-3/4"	0.93
2"	SANV-2.0	2-33/64"	100'/200'	150	29	5"	1.20
2-1/2"	SANV-2.5	3-3/64"	100'/200'	150	29	6"	1.71
3"	SANV-3.0	3-35/64"	100'/200'	150	29	7"	2.09
4"	SANV-4.0	4-5/8"	100'/200'	150	29	9"	2.94

# CORNUCOPIA™

All-Purpose Sanitary Hose

CORNUCOPIA™ hose is a multipurpose sanitary hose. CORNUCOPIA™ is formulated for use with fatty foods, wine, beer, potable water, and other related foodstuffs. The white, smooth EPDM tube ensures food quality by being odorless and does not alter taste. The UHMWPE outer cover not only dramatically increases the abrasion resistance of the hose but is Antimicrobial and offers increased dragability. The high working temperature allows for the sterilization of the hose with steam at 230°F for 30 minutes. Meets FDA title 21 part. 177.2600(f) for fatty foods, BfR, ADI Free, D.M. 21/03/73, EC 1935 / 2004.



## TECHNICAL DATA

Tube	White, EPDM	
Cover	Red, EPDM with a clear UHMWPE wrap	
Reinforcement	High strength synthetic plies with steel wire spirals	
Safety Factor	3:1	
Temperature	-40°F to +284°F	
Branding	TEXCEL® CORNUCOPIA™ ALL PURPOSE SANITARY HOSE 150 PSI (10 BAR) W.P. UHMW COVER TEMP. -40F TO 284F (-40C to 140C) FDA BfR D.M.21/03/73 ADI FREE STERILIZATION at 230F FOR 30 MINS	
Safety Note	It is recommended that all food grade hose be thoroughly flushed prior to initial use	
Features	FDA and USDA compliant  UHMWPE abrasion-resistant, Antimicrobial cover	

I.D.	Part Number	O.D.	Std. Length	Working Pressure (psi)	Vacuum (in./HG)	Bend Radius	Lbs./Ft.
1"	FDA-1.0-100	1 3/8"	100'	150	29	3.5"	0.54
1-1/4"*	FDA-1.25-100	1 47/64"	100'	150	29	4.25"	0.83
1-1/2"	FDA-1.5--100	1 31/32"	100'	150	29	5"	0.93
2"	FDA-2.0-100	2 1/2"	100'	150	29	7.5"	1.26
2-1/2"*	FDA-2.5-100	3 1/32"	100'	150	29	9"	1.75
3"	FDA-3.0-100	3 1/2"	100'	150	29	11"	2.02
4"	FDA-4.0-100	4 9/16"	100'	150	29	13"	3.09



\*Special order items only.



# TEX-COMMODITY

FDA Commodity Hose

The original "Green Monster", TEX-COMMODITY is the premier material handling hose in the industry. Suitable for abrasive materials, wet or dry. Also used for foodstuffs, flour, plastic pellets, etc. Ideal for sandblast return operations. Tube meets FDA requirements for food and potable water.



## TECHNICAL DATA

Tube	White, natural gum rubber	
Cover	Green, SBR	
Reinforcement	High tensile tire cord plies; helix wire	
Safety Factor	4:1	
Temperature	-40°F to +190°F	
Branding	TEXCEL® TEX-COMMODITY - FDA COMMODITY HOSE XXX PSI W.P.	
Safety Note	It is recommended that all food grade hose be thoroughly flushed prior to initial use	
Features	FDA and USDA compliant	




I.D.	# Part Number	O.D.	Tube Gauge	Std. Length	Working Pressure (psi)	Vacuum (in./HG)	Bend Radius	Lbs./Ft.
2"	COMM-2.0	2-27/32"	1/4"	100'	150	29	5"	2.60
2-1/2"	COMM-2.5	3-13/32"	1/4"	100'	150	29	8"	3.10
3"	COMM-3.0	3-7/8"	1/4"	100'	150	29	10.5"	3.62
4"	COMM-4.0	4-15/16"	1/4"	100'	100	29	12"	5.57
5"	COMM-5.0	5-15/16"	1/4"	50'	75	28	13.5"	7.00
6"	COMM-6.0	6-59/64"	5/16"	50'	50	25	15"	7.25
8"	COMM-8.0	9-3/32"	3/8"	50'	50	20	17"	10.80
10"	COMM-10.0	11-5/16"	3/8"	25'	50	20	19"	15.10
12"	COMM-12.0	13-7/16"	3/8"	25'	50	20	25"	18.20

# SIGMA-POLY MHH™

Polyurethane Food-Grade Suction & Discharge Hose

Heavy-duty construction that complies with all applicable FDA requirements. Clear polyurethane and blue PVC helix construction allows for visual confirmation of material flow. Smooth bore construction eliminates material build up. Yarn reinforced for discharge applications. Heavy corrugation provides extra flexibility. Embedded wire prevents static electricity build up.

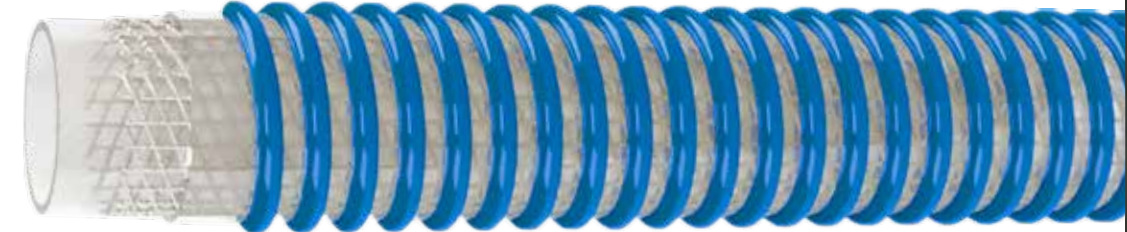

## TECHNICAL DATA

Construction	Clear, flexible polyurethane with a blue, tough vinyl right-handed helix; synthetic yarn reinforcement, embedded copper wire for grounding
Safety Factor	3:1
Temperature	-40°F to +150°F
Branding	TEXCEL® SIGMA-PVC MHH™ - POLYURETHANE FOOD GRADE SUCTION / DISCHARGE HOSE -<ID>-LOT
Safety Note	Grounding wire must be properly terminated at both ends in order to dissipate static electricity  It is recommended that all food grade hose be thoroughly flushed prior to initial use
Features	FDA and USDA compliant, Phthalate Free

I.D.	# Part Number	O.D.	Std. Length	Working Pressure (psi)	Vacuum (in./HG)	Bend Radius	Lbs./Ft.
3"	SPVC-MHH-3.0	3.78"	100'	100	29	10"	1.18
4"	SPVC-MHH-4.0	4.85"	100'	75	29	12"	1.58
5"	SPVC-MHH-5.0	5.80"	20'/50'/100'	70	28	14"	2.47
6"	SPVC-MHH-6.0	6.93"	20'/50'/100'	70	28	14"	2.86





# TEX-STEAM™ FDA

Food Grade Steam Hose

TEX-STEAM™ FDA is a specially-compounded steam hose. It is suitable for the delivery of potable hot water mixed with steam and detergents. The main use is for washdown and sterilization in the food industry and manufacturing plants. TEX-STEAM™ FDA has a white, smooth, food quality EPDM rubber tube and a blue, smooth, cloth-impression EPDM rubber cover for abrasion-, ozone-, and weather-resistance. Meets FDA title 21, part.177.2600 for aqueous foods.



## TECHNICAL DATA

Tube	White, EPDM
Cover	Blue, EPDM
Reinforcement	High strength synthetic plies
Safety Factor	10:1
Temperature	-40°F to 338°F
Branding	TEXCEL® TEX-STEAM™ FDA STEAM HOSE 105 PSI (7 BAR) W.P TEMP. -40F TO 338F (-40C to 170C) 10:1 SAFETY FACTOR
Safety Note	Drain the hose after each use for maximum hose life  Do not alternate use between steam and water  Texcel recommends using Dixon Valve and Coupling's Boss™ Stainless Steel Ground Joint and 4-Bolt System for Tex-STEAM™ FDA. Please consult Dixon for proper coupling procedures.  It is recommended that all food grade hose be thoroughly flushed prior to initial use
Features	FDA and USDA compliant

I.D.	Part Number	O.D.	Std. Length	Working Pressure (psi)	Lbs./Ft.
1/2"	STFD-.5-100	15/16"	100	105	0.25
3/4"	STFD-.75-100	1 7/32"	100	105	0.39
1"	STFD-1.0-100	1 29/64"	100	105	0.5

# FDA-BULK

Food Grade Dry Material Discharge Hose

Soft Wall hose for dry and abrasive food stuffs such as grains, rice, sugar, flour and animal foods. Meets FDA title 21, part.177.2600 for dry foods, BfR, ADI free, phthalate free, D.M. 21/03/73, CE 1935/2004



## TECHNICAL DATA

Tube	White, smooth NR rubber compound, food quality odorless and taste free
Cover	Gray, smooth, cloth impressions NR/SBR rubber compound, resistant to abrasion and weather
Reinforcement	High strength synthetic plies, with stranded copper wire for hose grounding
Safety Factor	3:1
Temperature	-40°F to +176°F Sterilization at 230°F for 30 minutes
Branding	TEXCEL® FDA-BULK - FOOD GRADE DRY MATERIAL DISCHARGE HOSE 1/8 TUBE 150 PSI W.P.

I.D.	Part Number	Tube Gauge	O.D.	Std. Length	Working Pressure (psi)	Number of Plies	Lbs./Ft.
4"	FDABULK-4-4-100	1/8"	4-13/32"	100'	150	2	1.63





# FDA-HEAT

## FDA Hot Air Blower Hose

Suction and delivery hose for hot dry air in FDA tanker hauling. FDA title 21 part.177.2600 (a,b,c,d) for dry foods.



### TECHNICAL DATA


Tube	White, Smooth EPDM rubber compound, food quality odorless and taste free	
Cover	Blue, cloth impression EPDM rubber, resistant to abrasion, ozone and weather	
Reinforcement	High strength synthetic plies with single steel wire helix	
Safety Factor	3:1	
Temperature	-40°F to +350°F	
Branding	TEXCEL® FDA - HEAT - FDA HOT AIR BLOWER HOSE 150 PSI W.P.	



	#						
I.D.	Part Number	O.D.	Std. Length	Bend Radius	Working Pressure (psi)	Vacuum (in./HG)	Lbs./Ft.
3"	FDAHEAT-3.0-100	3-35/64"	100'	12"	150	29	1.85

# TEX-QD

## Quick Disconnect Fittings

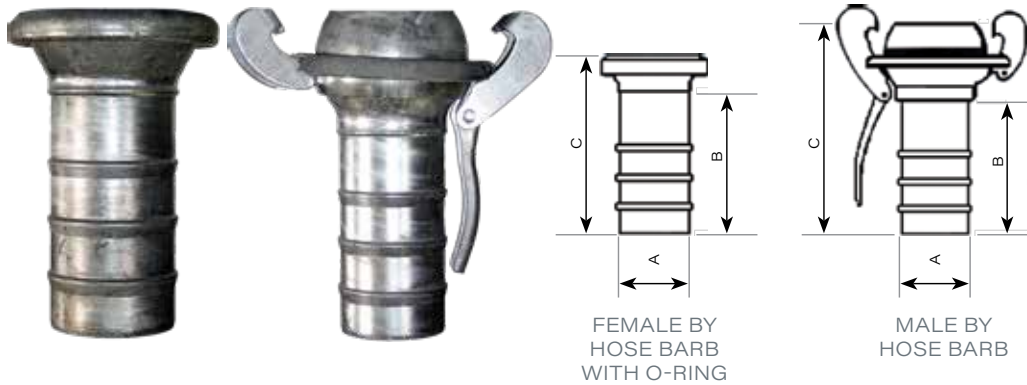

FEMALE BY HOSE BARB WITH O-RING

MALE BY HOSE BARB

### FEMALE BY HOSE BARB WITH O-RING:

I.D.	Part Number	A Dim.	B Dim.	C Dim.	Lbs./Each
2"	2.0-QDF-SP	2.0"	3.75"	5.25"	0.75
3"	3.0-QDF-SP	3.0"	5.25"	7.0"	1.75
4"	4.0-QDF-SP	4.0"	8.0"	10.5"	3.30
6"	6.0-QDF-SP	6.0"	8.5"	10.5"	6.40
8"	8.0-QDF-SP	7-58/64"	9.25"	13"	12.70
<b>With Locking Lever Welded On</b>					
10"	10.0-QDF-SP	9-56/64"	11.5"	15.75"	28.00
12"	12.0-QDF-SP	11-56/64"	11.5"	16.5"	39.00

### MALE BY HOSE BARB:

I.D.	Part Number	A Dim.	B Dim.	C Dim.	Lbs./Each
<b>With Locking Lever Welded On</b>					
2"	2.0-QDM-SP	2.0"	3.75"	6.25"	1.65
3"	3.0-QDM-SP	3.0"	5.25"	8.25"	3.35
4"	4.0-QDM-SP	4.0"	8.0"	12.5"	7.10
6"	6.0-QDM-SP	6.0"	8.5"	12.5"	14.15
8"	8.0-QDM-SP	7-58/64"	9.25"	15.0"	21.15
<b>Lever Welded on Female End</b>					
10"	10.0-QDM-SP	9-56/64"	11.5"	15.75"	25.0
12"	12.0-QDM-SP	11-56/64"	11.5"	6.5"	35.0



## TEX-QD-HD

Quick Disconnect Fittings



### FEMALE BY HOSE BARB WITH O-RING:

I.D.	Part Number	A Dim.	B Dim.	C Dim.	Lbs./Each
4"	4.0-QDF-HD-SP	4.0"	8.0"	10.5"	4
6"	6.0-QDF-HD-SP	6.0"	8.5"	10.5"	10
8"	8.0-QDF-HD-SP	7-5/8"	9.25"	13"	15


### MALE BY HOSE BARB:

I.D.	Part Number	A Dim.	B Dim.	C Dim.	Lbs./Each
With Locking Lever Welded On					
4"	4.0-QDM-HD-SP	4.0"	8.0"	12.5"	8
6"	6.0-QDM-HD-SP	6.0"	8.5"	12.5"	17
8"	8.0-QDM-HD-SP	7-5/8"	9.25"	15.0"	26

## TEX-RHS

Round Hole Strainers

14 gauge zinc-plated strainer by female thread.

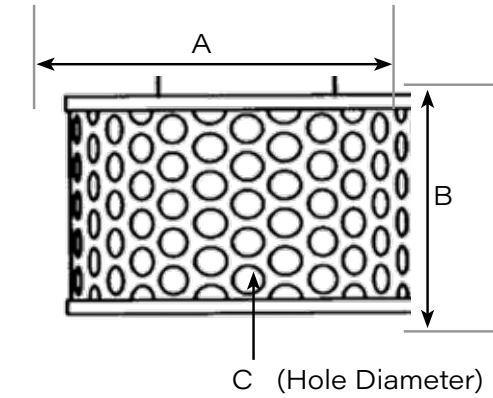

Female Thread Diameter	Part Number	A Dim.	B Dim.	C Dim.	Lbs./Each
1-1/2"	1.5-ROUND-STRAINER-SP	5.0"	4.25"	0.375"	1.20
2"	2.0-ROUND-STRAINER-SP	6.0"	4.5"	0.375"	1.65
2-1/2"	2.5-ROUND-STRAINER-SP	6.0"	4.5"	0.375"	1.85
3"	3.0-ROUND-STRAINER-SP	7.0"	5.625"	0.375"	2.35
4"	4.0-ROUND-STRAINER-SP	7.0"	5.75"	0.375"	2.45
6"	6.0-ROUND-STRAINER-SP	9.125"	9.25"	1.0"	5.70
8"	8.0-ROUND-STRAINER-SP	11.375"	11.25"	1.0"	9.95





## SIGMA-CLAMP™

### Double Bolt Spiral Clamp

Double bolt spiral clamps are recommended for use with Texcel's Sigma-Series PVC hoses with convoluted cover.



	Hose Diameter	Part Number	Lbs./Each
Right Hand	1-½"	1.5-SP-CLAMP	0.29
	2"	2.0-SP-CLAMP	0.34
	2-½"	2.5-SP-CLAMP	0.63
	3"	3.0-SP-CLAMP	0.72
	4"	4.0-SP-CLAMP	1.21
	5"	5.0-SP-CLAMP	1.41
	6"	6.0-SP-CLAMP	2.29
Left Hand	8"	8.0-SP-CLAMP	2.97
	1-½"	1.5-SP-CLAMP-LH	0.29
	2"	2.0-SP-CLAMP-LH	0.34
	3"	3.0-SP-CLAMP-LH	0.72
	4"	4.0-SP-CLAMP-LH	1.21
	5"	5.0-SP-CLAMP-LH	1.41
	6"	6.0-SP-CLAMP-LH	2.29
8"	8.0-SP-CLAMP-LH	2.97	

## SIGMA-COIL™

### Banding Coil

Use banding coils to level external corrugations, or when using sleeves or bands for increased surface area and improved compression and fitting retention. Each piece makes two hose ends (one hose assembly). Operator must cut into two pieces.



Hose Diameter	Part Number	In./Each	Lbs./Each
1-½"	1.5-SLINKY	2.75"	0.07
2"	2.0-SLINKY	3.0"	0.12
2-½"	2.5-SLINKY	3.25"	0.16
3"	3.0-SLINKY	3.5"	0.23
4"	4.0-SLINKY	3.75"	0.45
5"	5.0-SLINKY	6.0"	1.27
6"	6.0-SLINKY	8.0"	1.93
8"	8.0-SLINKY	8.5"	3.71







# CAM & GROOVE COUPLING LINE

## Type A Adapter

Aluminum Constructed Cam and Groove type A male adapter by female NPT. Also available in stainless steel and brass.



Hose Diameter	Part Number	Lbs./Each
3/4"	.75-A-ALUM-SP	0.1
1"	1.0-A-ALUM-SP	0.14
1-1/4"	1.25-A-ALUM-SP	0.22
1-1/2"	1.5-A-ALUM-SP	0.27
2"	2.0-A-ALUM-SP	0.31
2-1/2"	2.5-A-ALUM-SP	0.41
3"	3.0-A-ALUM-SP	0.59
4"	4.0-A-ALUM-SP	1.22
5"	5.0-A-ALUM-SP	2.09
6"	6.0-A-ALUM-SP	2.62
8"	8.0-A-ALUM-SP	8.5
3/4"	.75-A-BRASS-SP	0.29
1"	1.0-A-BRASS-SP	0.38
1-1/4"	1.25-A-BRASS-SP	0.59
1-1/2"	1.5-A-BRASS-SP	0.75
2"	2.0-A-BRASS-SP	1.1
2-1/2"	2.5-A-BRASS-SP	2.48
3"	3.0-A-BRASS-SP	2.09
4"	4.0-A-BRASS-SP	3.45



# CAM & GROOVE COUPLING LINE

## Type B Coupler

Aluminum Constructed Cam and Groove type B female coupler by male NPT. Also available in stainless steel and brass.



Hose Diameter	Part Number	Lbs./Each
3/4"	.75-B-ALUM-SP	0.26
1"	1.0-B-ALUM-SP	0.44
1-1/4"	1.25-B-ALUM-SP	0.66
1-1/2"	1.5-B-ALUM-SP	0.69
2"	2.0-B-ALUM-SP	0.85
2-1/2"	2.5-B-ALUM-SP	1.0
3"	3.0-B-ALUM-SP	1.65
4"	4.0-B-ALUM-SP	2.26
5"	5.0-B-ALUM-SP	2.64
6"	6.0-B-ALUM-SP	4.37
8"	8.0-B-ALUM-SP	15.66
3/4"	.75-B-BRASS-SP	0.41
1"	1.0-B-BRASS-SP	0.64
1-1/4"	1.25-B-BRASS-SP	1.1
1-1/2"	1.5-B-BRASS-SP	1.23
2"	2.0-B-BRASS-SP	1.43
2-1/2"	2.5-B-BRASS-SP	1.98
3"	3.0-B-BRASS-SP	2.88
4"	4.0-B-BRASS-SP	4.08



# CAM & GROOVE COUPLING LINE

## Type C Coupler

Aluminum Constructed Cam and Groove type C female coupler by hose shank. Also available in stainless steel and brass.



Hose Diameter	Part Number	Lbs./Each
3/4"	.75-C-ALUM-SP	0.26
1"	1.0-C-ALUM-SP	0.45
1-1/4"	1.25-C-ALUM-SP	0.70
1-1/2"	1.5-C-ALUM-SP	0.75
2"	2.0-C-ALUM-SP	1.04
2-1/2"	2.5-C-ALUM-SP	1.47
3"	3.0-C-ALUM-SP	2.04
4"	4.0-C-ALUM-SP	2.94
5"	5.0-C-ALUM-SP	3.37
6"	6.0-C-ALUM-SP	6.39
8"	8.0-C-ALUM-SP	13.00
3/4"	.75-C-BRASS-SP	0.46
1"	1.0-C-BRASS-SP	0.73
1-1/4"	1.25-C-BRASS-SP	1.15
1-1/2"	1.5-C-BRASS-SP	1.43
2"	2.0-C-BRASS-SP	1.91
2-1/2"	2.5-C-BRASS-SP	2.94
3"	3.0-C-BRASS-SP	3.58
4"	4.0-C-BRASS-SP	5.07
3/4"	.75-C-SS-SP	0.39
1	1.0-C-SS-SP	0.65
1-1/4"	1.25-C-SS-SP	1.02
1-1/2"	1.5-C-SS-SP	1.23
2	2.0-C-SS-SP	1.78
2-1/2"	2.5-C-SS-SP	2.77
3	3.0-C-SS-SP	3.4
4	4.0-C-SS-SP	5.89
5	5.0-C-SS-SP	7.25
6	6.0-C-SS-SP	11
2"	2.0-C-CS-SP	1.78
3"	3.0-C-CS-SP	3.88
4"	4.0-C-CS-SP	5.89

# CAM & GROOVE COUPLING LINE

## Type D Coupler

Aluminum Constructed Cam and Groove type D female coupler by male NPT. Also available in stainless steel and brass.



Hose Diameter	Part Number	Lbs./Each
3/4"	.75-D-ALUM-SP	0.26
1"	1.0-D-ALUM-SP	0.37
1-1/4"	1.25-D-ALUM-SP	0.77
1-1/2"	1.5-D-ALUM-SP	0.80
2"	2.0-D-ALUM-SP	0.88
2-1/2"	2.5-D-ALUM-SP	1.0
3"	3.0-D-ALUM-SP	1.75
4"	4.0-D-ALUM-SP	2.51
5"	5.0-D-ALUM-SP	3.51
6"	6.0-D-ALUM-SP	5.31
8"	8.0-D-ALUM-SP	11
3/4"	.75-D-BRASS-SP	0.44
1"	1.0-D-BRASS-SP	0.68
1-1/4"	1.25-D-BRASS-SP	1.14
1-1/2"	1.5-D-BRASS-SP	1.32
2"	2.0-D-BRASS-SP	1.54
2-1/2"	2.5-D-BRASS-SP	1.98
3"	3.0-D-BRASS-SP	3.06
4"	4.0-D-BRASS-SP	4.96
3/4"	.75-D-SS-SP	0.48
1"	1.0-D-SS-SP	0.81
1-1/4"	1.25-D-SS-SP	1.44
1-1/2"	1.5-D-SS-SP	1.50
2"	2.0-D-SS-SP	1.82
2-1/2"	2.5-D-SS-SP	2.54
3"	3.0-D-SS-SP	3.24
4"	4.0-D-SS-SP	5.18
5"	5.0-D-SS-SP	8.35
6"	6.0-D-SS-SP	8.42





## CAM & GROOVE COUPLING LINE

### Type E Coupler

Aluminum Constructed Cam and Groove type E male coupler by hose shank.  
Also available in stainless steel and brass.



Hose Diameter	Part Number	Lbs./Each
3/4"	.75-E-ALUM-SP	0.13
1"	1.0-E-ALUM-SP	0.22
1-1/4"	1.25-E-ALUM-SP	0.30
1-1/2"	1.5-E-ALUM-SP	0.39
2"	2.0-E-ALUM-SP	0.63
2-1/2"	2.5-E-ALUM-SP	0.89
3"	3.0-E-ALUM-SP	1.10
4"	4.0-E-ALUM-SP	2.11
5"	5.0-E-ALUM-SP	2.95
6"	6.0-E-ALUM-SP	6.25
8"	8.0-E-ALUM-SP	8.75
3/4"	.75-E-BRASS-SP	0.36
1"	1.0-E-BRASS-SP	0.59
1-1/4"	1.25-E-BRASS-SP	0.99
1-1/2"	1.5-E-BRASS-SP	1.24
2"	2.0-E-BRASS-SP	1.87
2-1/2"	2.5-E-BRASS-SP	2.69
3"	3.0-E-BRASS-SP	4
4"	4.0-E-BRASS-SP	6.34
3/4"	.75-E-SS-SP	0.31
1"	1.0-E-SS-SP	0.51
1-1/4"	1.25-E-SS-SP	0.9
1-1/2"	1.5-E-SS-SP	1.12
2"	2.0-E-SS-SP	1.65
2-1/2"	2.5-E-SS-SP	2.58
3"	3.0-E-SS-SP	3.55
4"	4.0-E-SS-SP	4.89
5"	5.0-E-SS-SP	6.11
6"	6.0-E-SS-SP	8.25
2"	2.0-E-CS-SP	1.67
3"	3.0-E-CS-SP	3.44
4"	4.0-E-CS-SP	4.89

## CAM & GROOVE COUPLING LINE

### Type F Adapter

Aluminum Constructed Cam and Groove type F male adapter by male NPT.  
Also available in stainless steel and brass.



Hose Diameter	Part Number	Lbs./Each
3/4"	.75-F-ALUM-SP	0.17
1"	1.0-F-ALUM-SP	0.22
1-1/4"	1.25-F-ALUM-SP	0.26
1-1/2"	1.5-F-ALUM-SP	0.40
2"	2.0-F-ALUM-SP	0.55
2-1/2"	2.5-F-ALUM-SP	0.97
3"	3.0-F-ALUM-SP	1.18
4"	4.0-F-ALUM-SP	2.02
5"	5.0-F-ALUM-SP	2.94
6"	6.0-F-ALUM-SP	3.98
8"	8.0-F-ALUM-SP	11.30
3/4"	.75-F-BRASS-SP	0.41
1"	1.0-F-BRASS-SP	0.81
1-1/4"	1.25-F-BRASS-SP	1.05
1-1/2"	1.5-F-BRASS-SP	1.27
2"	2.0-F-BRASS-SP	1.8
2-1/2"	2.5-F-BRASS-SP	2.2
3"	3.0-F-BRASS-SP	3.62
4"	4.0-F-BRASS-SP	6.39
3/4"	.75-F-SS-SP	0.39
1"	1.0-F-SS-SP	0.78
1-1/4"	1.25-F-SS-SP	0.98
1-1/2"	1.5-F-SS-SP	1.7
2"	2.0-F-SS-SP	1.75
2-1/2"	2.5-F-SS-SP	1.7
3"	3.0-F-SS-SP	3.55
4"	4.0-F-SS-SP	6.18
5"	5.0-F-SS-SP	8.22
6"	6.0-F-SS-SP	10.55





## CAM & GROOVE COUPLING LINE

### Type Dust Cap

Dust caps are the solution to seal a hose assembly when it is not under pressure during transfer or storage. The aluminum constructed dust cap is compatible with type A & E. Also available in stainless steel and brass.



Hose Diameter	Part Number	Lbs./Each
3/4"	.75-DC-ALUM-SP	0.21
1"	1.0-DC-ALUM-SP	0.44
1-1/4"	1.25-DC-ALUM-SP	0.62
1-1/2"	1.5-DC-ALUM-SP	0.69
2"	2.0-DC-ALUM-SP	0.79
2-1/2"	2.5-DC-ALUM-SP	1.19
3"	3.0-DC-ALUM-SP	1.57
4"	4.0-DC-ALUM-SP	2.2
5"	5.0-DC-ALUM-SP	3.02
6"	6.0-DC-ALUM-SP	3.95
8"	8.0-DC-ALUM-SP	8.82
3/4"	.75-DC-BRASS-SP	0.38
1"	1.0-DC-BRASS-SP	0.55
1-1/4"	1.25-DC-BRASS-SP	1.05
1-1/2"	1.5-DC-BRASS-SP	1.07
2"	2.0-DC-BRASS-SP	1.43
2-1/2"	2.5-DC-BRASS-SP	2.04
3"	3.0-DC-BRASS-SP	2.76
4"	4.0-DC-BRASS-SP	3.86
3/4"	.75-DC-SS-SP	0.35
1"	1.0-DC-SS-SP	0.51
1-1/4"	1.25-DC-SS-SP	0.98
1-1/2"	1.5-DC-SS-SP	1.01
2"	2.0-DC-SS-SP	1.33
2-1/2"	2.5-DC-SS-SP	1.95
3"	3.0-DC-SS-SP	2.55
4"	4.0-DC-SS-SP	3.56
5"	5.0-DC-SS-SP	4.12
6"	6.0-DC-SS-SP	6.33

## CAM & GROOVE COUPLING LINE

### Type Dust Plug

Dust plugs are the solution to seal a hose assembly when it is not under pressure during transfer or non-use. The aluminum constructed dust plug is compatible with type C & D. Also available in stainless steel and brass.



Hose Diameter	Part Number	Lbs./Each
3/4"	.75-DP-ALUM-SP	0.07
1"	1.0-DP-ALUM-SP	0.11
1-1/4"	1.25-DP-ALUM-SP	0.22
1-1/2"	1.5-DP-ALUM-SP	0.25
2"	2.0-DP-ALUM-SP	0.35
2-1/2"	2.5-DP-ALUM-SP	0.41
3"	3.0-DP-ALUM-SP	0.69
4"	4.0-DP-ALUM-SP	1.29
5"	5.0-DP-ALUM-SP	1.63
6"	6.0-DP-ALUM-SP	2.36
8"	8.0-DP-ALUM-SP	6.14
3/4"	.75-DP-BRASS-SP	0.17
1"	1.0-DP-BRASS-SP	0.3
1-1/4"	1.25-DP-BRASS-SP	0.61
1-1/2"	1.5-DP-BRASS-SP	0.75
2"	2.0-DP-BRASS-SP	1.19
2-1/2"	2.5-DP-BRASS-SP	1.71
3"	3.0-DP-BRASS-SP	2.2
4"	4.0-DP-BRASS-SP	3.67
3/4"	.75-DP-SS-SP	0.16
1"	1.0-DP-SS-SP	0.25
1-1/4"	1.25-DP-SS-SP	0.55
1-1/2"	1.5-DP-SS-SP	0.66
2"	2.0-DP-SS-SP	1.05
2-1/2"	2.5-DP-SS-SP	1.66
3"	3.0-DP-SS-SP	2.02
4"	4.0-DP-SS-SP	3.55
5"	5.0-DP-SS-SP	4.25
6"	6.0-DP-SS-SP	5.55





# FERRULE



Hose Diameter	Sleeve ID	Part Number
1"	1-32/64	1.0-CS-FERR-132-SP
1"	1-36/64	1.0-CS-FERR-136-SP
1"	1-40/64	1.0-CS-FERR-140-SP
1-1/4"	1-48/64	1.25-CS-FERR-148-SP
1-1/2"	2	1.5-CS-FERR-200-SP
1-1/2"	2-04/64	1.5-CS-FERR-204-SP
1-1/2"	2-08/64	1.5-CS-FERR-208-SP
2"	2-32/64	2.0-CS-FERR-232-SP
2"	2-36/64	2.0-CS-FERR-236-SP
2"	2-40/64	2.0-CS-FERR-240-SP
2"	2-44/64	2.0-CS-FERR-244-SP
2"	2-48/64	2.0-CS-FERR-248-SP
2"	2-52/64	2.0-CS-FERR-252-SP
2"	2-56/64	2.0-CS-FERR-256-SP
2-1/2"	3-08/64	2.5-CS-FERR-308-SP
2-1/2"	3-12/64	2.5-CS-FERR-312-SP
2-1/2"	3-16/64	2.5-CS-FERR-316-SP
2-1/2"	3-32/64	2.5-CS-FERR-332-SP
3"	3-36/64	3.0-CS-FERR-336-SP
3"	3-40/64	3.0-CS-FERR-340-SP
3"	3-44/64	3.0-CS-FERR-344-SP
3"	3-48/64	3.0-CS-FERR-348-SP
3"	3-52/64	3.0-CS-FERR-352-SP
3"	3-56/64	3.0-CS-FERR-356-SP
3"	3-60/64	3.0-CS-FERR-360-SP
3"	4	3.0-CS-FERR-400-SP
4"	4-36/64	4.0-CS-FERR-436-SP
4"	4-40/64	4.0-CS-FERR-440-SP
4"	4-44/64	4.0-CS-FERR-444-SP
4"	4-48/64	4.0-CS-FERR-448-SP
4"	4-52/64	4.0-CS-FERR-452-SP
4"	4-56/64	4.0-CS-FERR-456-SP
4"	4-60/64	4.0-CS-FERR-460-SP
4"	5	4.0-CS-FERR-500-SP
4"	5-04/64	4.0-CS-FERR-504-SP
6"	6-40/64	6.0-CS-FERR-640-SP
6"	6-48/64	6.0-CS-FERR-648-SP
6"	6-56/64	6.0-CS-FERR-656-SP
6"	7	6.0-CS-FERR-700-SP
6"	7-08/64	6.0-CS-FERR-708-SP
6"	7-24/64	6.0-CS-FERR-724-SP
8"	8-48/64	8.0-CS-FERR-848-SP
8"	9	8.0-CS-FERR-900-SP
8"	9-16/64	8.0-CS-FERR-916-SP
8"	9-32/64	8.0-CS-FERR-932-SP

# KC-NIP

KC NIPPLE



Hose Diameter	Part Number	Lbs./Each
3/4"	.75-KC-NIP-SP	0.18
1"	1.0-KC-NIP-SP	0.22
1-1/2"	1.5-KC-NIP-SP	0.25
2"	2.0-KC-NIP-SP	1.04
2-1/2"	2.5-KC-NIP-SP	1
3"	3.0-KC-NIP-SP	2.2
4"	4.0-KC-NIP-SP	3.97
5"	5.0-KC-NIP-SP	5.25
6"	6.0-KC-NIP-SP	8.82
8"	8.0-KC-NIP-SP	15
10"	10.0-KC-NIP-SP	18
12"	12.0-KC-NIP-SP	22





# MALE PIPE

## MALE PIPE THREAD CRIMP



Hose Diameter	Part Number	Lbs./Each
2"	2.0-CS-MNPT-CRIMP-SP	2.9
3"	3.0-CS-MNPT-CRIMP-SP	3.7
4"	4.0-CS-MNPT-CRIMP-SP	4.8
6"	6.0-CS-MNPT-CRIMP-SP	10.3

# SLEEVE



Hose Diameter	Sleeve ID	Part Number
2"	2- <sup>36</sup> / <sub>64</sub>	2.0-CS-SLEEVE-236-SP
2"	2- <sup>40</sup> / <sub>64</sub>	2.0-CS-SLEEVE-240-SP
2"	2- <sup>48</sup> / <sub>64</sub>	2.0-CS-SLEEVE-248-SP
3"	3- <sup>36</sup> / <sub>64</sub>	3.0-CS-SLEEVE-336-SP
3"	3- <sup>40</sup> / <sub>64</sub>	3.0-CS-SLEEVE-340-SP
3"	3- <sup>44</sup> / <sub>64</sub>	3.0-CS-SLEEVE-344-SP
3"	3- <sup>48</sup> / <sub>64</sub>	3.0-CS-SLEEVE-348-SP
3"	3- <sup>52</sup> / <sub>64</sub>	3.0-CS-SLEEVE-352-SP
3"	3- <sup>56</sup> / <sub>64</sub>	3.0-CS-SLEEVE-356-SP
4"	4- <sup>40</sup> / <sub>64</sub>	4.0-CS-SLEEVE-440-SP
4"	4- <sup>44</sup> / <sub>64</sub>	4.0-CS-SLEEVE-444-SP
4"	4- <sup>48</sup> / <sub>64</sub>	4.0-CS-SLEEVE-448-SP
4"	4- <sup>52</sup> / <sub>64</sub>	4.0-CS-SLEEVE-452-SP
4"	4- <sup>56</sup> / <sub>64</sub>	4.0-CS-SLEEVE-456-SP
4"	4- <sup>60</sup> / <sub>64</sub>	4.0-CS-SLEEVE-460-SP
5"	5- <sup>48</sup> / <sub>64</sub>	5.0-CS-SLEEVE-548-SP
5"	5- <sup>60</sup> / <sub>64</sub>	5.0-CS-SLEEVE-560-SP
6"	6- <sup>40</sup> / <sub>64</sub>	6.0-CS-SLEEVE-640-SP
6"	6- <sup>48</sup> / <sub>64</sub>	6.0-CS-SLEEVE-648-SP
6"	6- <sup>56</sup> / <sub>64</sub>	6.0-CS-SLEEVE-656-SP
6"	7	6.0-CS-SLEEVE-700-SP
6"	7- <sup>08</sup> / <sub>64</sub>	6.0-CS-SLEEVE-708-SP
6"	7- <sup>16</sup> / <sub>64</sub>	6.0-CS-SLEEVE-716-SP
6"	7- <sup>24</sup> / <sub>64</sub>	6.0-CS-SLEEVE-724-SP
8"	8- <sup>32</sup> / <sub>64</sub>	8.0-CS-SLEEVE-832-SP
8"	8- <sup>48</sup> / <sub>64</sub>	8.0-CS-SLEEVE-848-SP
8"	9	8.0-CS-SLEEVE-900-SP
8"	9- <sup>08</sup> / <sub>64</sub>	8.0-CS-SLEEVE-908-SP
8"	9- <sup>32</sup> / <sub>64</sub>	8.0-CS-SLEEVE-932-SP





## FLANGES



### FLOATING FLANGES

Hose Diameter	Part Number
2"	2.0-CS-FLANGE-SP
3"	3.0-CS-FLANGE-SP
4"	4.0-CS-FLANGE-SP
6"	6.0-CS-FLANGE-SP

### FIXED FLANGES

Hose Diameter	Part Number
2"	2.0-CS-FX-CRIMP-SP
3"	3.0-CS-FX-CRIMP-SP
4"	4.0-CS-FX-CRIMP-SP
6"	6.0-CS-FX-CRIMP-SP

### TURNBACKS

Hose Diameter	Part Number
2"	2.0-CS-TURNBACK-SP
3"	3.0-CS-TURNBACK-SP
4"	4.0-CS-TURNBACK-SP
6"	6.0-CS-TURNBACK-SP

## MALE ADAPTERS

SPOOL ADAPTER (MALE X MALE)



Hose Diameter	Part Number
2"	2.0-AA-ALUM-SP
2"	2.0-AA-SS-SP
3"	3.0-AA-ALUM-SP
4"	4.0-AA-ALUM-SP





## FEMALE ADAPTERS

DOUBLE FEMALE ADAPTER (FEMALE X FEMALE)



Hose Diameter	Part Number
2"	2.0-DD-ALUM-SP
2"	2.0-DD-SS-SP
3"	3.0-DD-ALUM-SP
4"	4.0-DD-ALUM-SP



## REDUCING ADAPTERS

COUPLER X ADAPTER - REDUCING (FEMALE X MALE)



Hose Diameter	Part Number
3" X 2"	3020-DA-AL-SP
3" X 2"	3020-DA-SS-SP
4" X 3"	4030-DA-AL-SP
6" X 4"	6040-DA-AL-SP





# BLAST FITTING

SANDBLAST COUPLING



Hose Diameter	Part Number
¾"	.75-Q1-ALUM
1"	1.0-Q2-ALUM
1-¼"	1.25-Q3-ALUM
1-½"	1.50-Q4-ALUM



# UNIVERSAL

UNIVERSAL CROWFOOT



Hose Diameter	Part Number
¾"	.75-CROW
1"	1.0-CROW



## METRIC CONVERSION CHART AND TABLE

### LENGTH

1 centimeter (cm)	=	10 millimeters (mm)
1 inch	=	2.54 centimeters (cm)
1 foot	=	0.3048 meters (m)
1 foot	=	12 inches
1 yard	=	3 feet
1 meter (m)	=	100 centimeters (cm)
1 meter (m)	=	3.280 feet
1 furlong	=	660 feet
1 kilometer (km)	=	1,000 meters (m)
1 kilometer (km)	=	0.621 miles
1 mile	=	5280 ft
1 mile	=	1.609 kilometers (km)
1 nautical mile	=	1.852 kilometers (km)

### AREA

1 square foot	=	144 square inches
1 square foot	=	929.030 square centimeters
1 square yard	=	9 square feet
1 square meter	=	10.763 square feet
1 acre	=	43,560 square feet
1 hectare	=	10,000 square meters
1 hectare	=	2.471 acres
1 square kilometer	=	100 hectares
1 square mile	=	2.589 square kilometers
1 square mile	=	640 acres

### SPEED

1 mile per hour	=	1.466 feet per second
1 mile per hour	=	1.609 kilometers per hour
1 knot	=	1.150 miles per hour
1 foot per second	=	0.681 miles per hour
1 kilometer per hour	=	0.621 miles per hour


### VOLUME

1 US tablespoon	=	3 US teaspoons
1 US fluid ounce	=	29.573 milliliters (ml)
1 US cup	=	16 US tablespoons
1 US cup	=	8 US fluid ounces
1 US pint	=	2 US cups
1 US pint	=	16 US fluid ounces
1 liter (l)	=	33.814 US fluid ounces
1 liter (l)	=	1000 milliliters (ml)
1 US quart	=	2 US pints
1 US gallon	=	4 US quarts
1 US gallon	=	3.78541178 liters

### WEIGHT

1 milligram (mg)	=	0.001 grams (g)
1 gram (g)	=	0.001 kilograms (kg)
1 gram (g)	=	0.035 ounces
1 ounce	=	28.349 grams (g)
1 ounce	=	0.0625 pounds
1 pound (lb)	=	16 ounces
1 pound (lb)	=	0.453 kilograms (kg)
1 kilogram (kg)	=	1,000 grams
1 kilogram (kg)	=	35.273 ounces
1 kilogram (kg)	=	2.204 pounds (lb)
1 stone	=	14 pounds
1 short ton	=	2,000 pounds
1 metric ton	=	1,000 kilograms (kg)

### TEMPERATURE

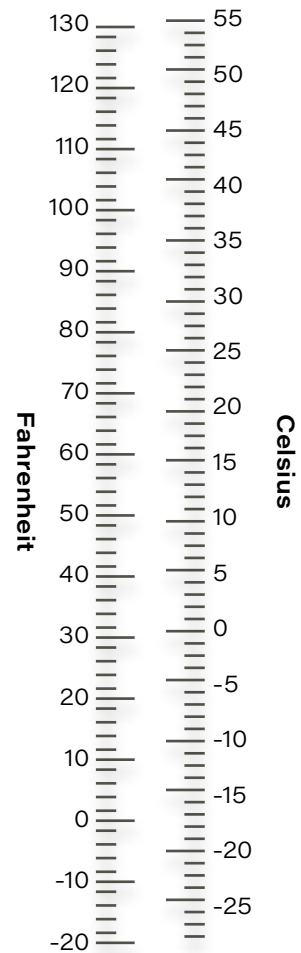

Texcel recommends using the following S.T.A.M.P.E.D. guide to determine the correct hose, coupling and attachment method for your intended application

<b>SIZE</b>	Hose length, fittings included (OAL):
	I.D.:
	O.D.:
Hose tolerance:	
<b>TEMPERATURE</b>	Minimum temperature of material going through the hose:
	Maximum temperature of material going through the hose:
	Minimum environmental temperature:
	Maximum environmental temperature:
<b>APPLICATION</b>	Indoor or outdoor use:
	Exceptional flexibility required? (Yes/No):
	Exposure to factors such as extreme ozone, heat, oil, abrasive materials, acid or other corrosive chemicals? (Yes/No):
	Food Grade quality? (Yes/No):
	Other:
<b>MATERIALS</b>	Solid? Specify:
	Liquid? Specify:
	Gas? Specify:
	Chemical? Specify:
<b>PRESSURE</b>	Vacuum requirements? (Yes/No):
	Working pressure of hose:
	Spikes in pressure:
<b>ENDS</b>	Style and material:
	Size:
	Threads/bolt hole alignment:
	Attachment methods:
Capped? (Yes/No):	
<b>DELIVERY</b>	Date required:
	Quantity needed:
	Testing Required? (Yes/No) If yes, then type:
	Certification Required? (Yes/No) If yes, then type:



## S.T.A.M.P.E.D



# NOTES

---



---



---



---



---



---



---



---



---



---



---



---



---



---



---



---



---



---



---



---



---



---



## LOCATIONS

### Contact Information

Toll Free: 800.231.7116  
 Fax: 800.759.4673  
 Sales and Customer Service: [sales@texcelrubber.com](mailto:sales@texcelrubber.com)  
[texcelrubber.com](http://texcelrubber.com)

### Corporate Headquarters

4444 Homestead Road  
 Houston, Texas 77028  
 Phone: 713.675.8590

## ADDITIONAL WAREHOUSE LOCATIONS

### Chicago

2725 Davey Road, Suite 400  
 Woodridge, Illinois 60517

### Sacramento

8760 Younger Creek Drive  
 Sacramento, California 95828

### Denver

2460 Airport Blvd., Suite 300  
 Aurora, Colorado 80011

### Newark

211 Executive Drive, Suite 9  
 Newark, Delaware 19702

### Birmingham

236 Distribution Drive  
 Homewood, Alabama 35209

## OTHER TEXCEL PRODUCTS

Looking for other quality products from Texcel? Request a catalog by calling 800.231.7116.





Ahead Of The Curve.

## Ask Us About Our Other Great Products



HYDRAULIC HOSE

FITTINGS

CRIMPERS



INDUSTRIAL HOSE

COUPLINGS

ASSEMBLIES



COMPRESSED SHEET

SHEET RUBBER

SKIRTBOARD

Distributed by:

