


Kanaflex®

101-PS

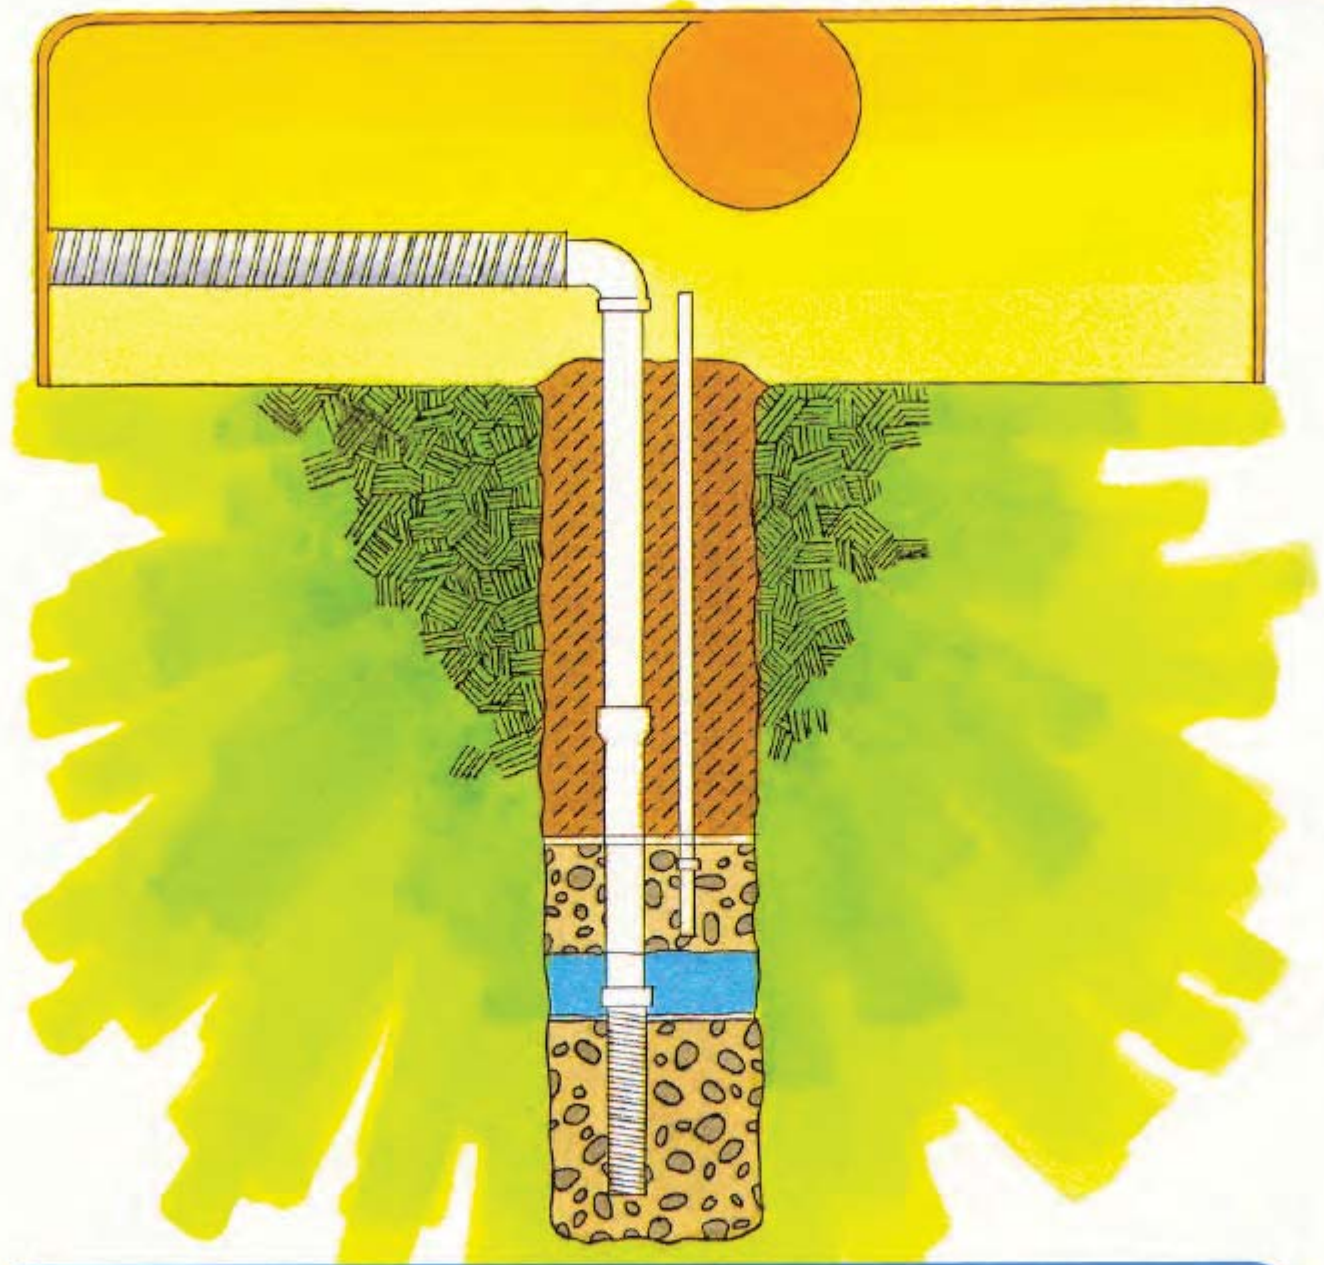

Kanaflex 101-PS PVC suction hose is specially designed for *use in methane recovery at landfill sites*. It performs well as a flexible pipeline from wellhead to main header and as a connection between rigid pipes of the same size. It is also ideal for quick emergency repairs of broken rigid lines.

Kanaflex[®]

101-PS

Corrugated exterior for superior flexibility.

Weatherproof . . . highly resistant to ozone, salt water and ultraviolet light.

Pliable . . . fits over pipe ends for flexible installations where ground or structure is subject to possible movement.

Smooth bore for unrestricted flow.

Functional . . . can be "welded" to rigid PVC pipe using conventional PVC cements.

Secure . . . provides a superior hold to rigid pipe when used with Kanaflex pipe-size "Power Lock" clamps. (see illustration)

Available in lengths of 100 ft. for rapid installation and lower labor costs.

POWERLOCK CLAMP PS
(PIPE SIZE)



SPECIFICATIONS

SIZE	OUTSIDE DIAMETER Inches	PITCH Inches	MIN. BENDING RADIUS 72°F, Inches	WORKING PRESSURE 72°F, P.S.I.	BURSTING PRESSURE 72°F, P.S.I.	VACUUM RATING 72°F, In. / Hg.	WEIGHT Lbs. / Ft.
2.375"	2.76	0.41	2.6	35	115	29.8	0.68
3.5"	4.00	0.63	3.5	30	100	29.8	1.20
4.5"	5.79	0.67	6.5	30	100	28.0	1.70

Kanaflex[®]
CORPORATION

800 Woodlands Parkway
Vernon Hills, IL 60061

DISTRIBUTED BY: